
2141265-3 <

HVA 630

TE Internal #: 2141265-3 Automotive Connector Caps & Covers, Cover Housing, Cable Exit Angle 180°, Orange, PA GF, -40 – 284 °F [-40 – 140 °C], HVA 630 View on TE.com >



Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Caps & Covers

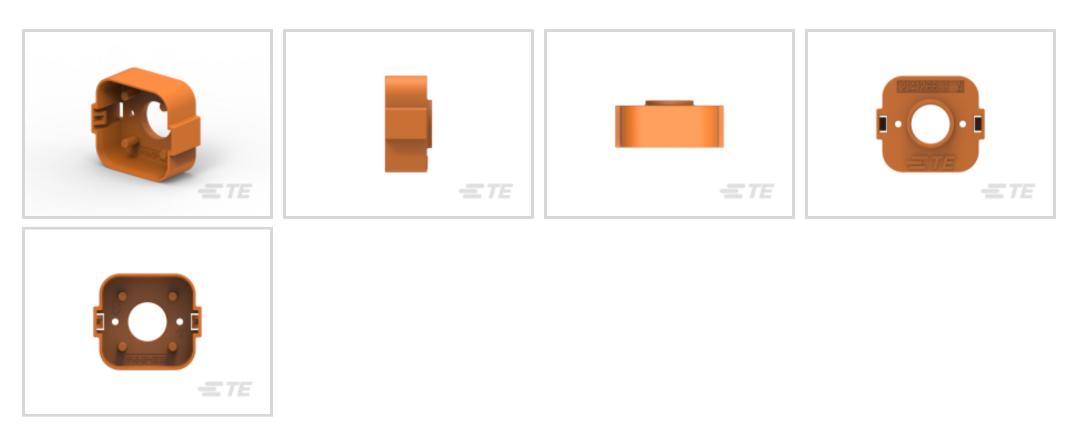

Protection & Strain Relief Accessory Type: Cover Housing

Cable Exit Angle: 180°

Strain Relief: With

Primary Product Color: Orange

Primary Product Material: PA GF

Features

Product Type Features

Protection & Strain Relief Accessory Type	Cover Housing	
Sealable	Yes	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Orange	
Primary Product Material	PAGF	
Mechanical Attachment		
Strain Relief	With	
Dimensions		
Compatible Cable Bundle Diameter Range	11.3 mm[.44 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °	

2141265-3

Automotive Connector Caps & Covers, Cover Housing, Cable Exit Angle 180°, Orange, PA GF, -40 – 284 °F [-40 – 140 °C], HVA 630



	C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F] [284 °F]	
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]	
Industry Standards		
UL Flammability Rating	None	
Packaging Features		
Packaging Quantity	600	
Packaging Method	Carton	
Other		
Serviceable	No	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)	

5) a dialata Liat Da al

Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

2141265-3

Automotive Connector Caps & Covers, Cover Housing, Cable Exit Angle 180°, Orange, PA GF, -40 – 284 °F [-40 – 140 °C], HVA 630



Compatible Parts





TE Part # 2141256-1 2POS,AMP MCP6.3/4.8K,REC HSG, ASSY



TE Part # 2141256-6 2POS,AMP MCP6.3/4.8K,REC HSG, ASSY,CODF

Also in the Series HVA 630

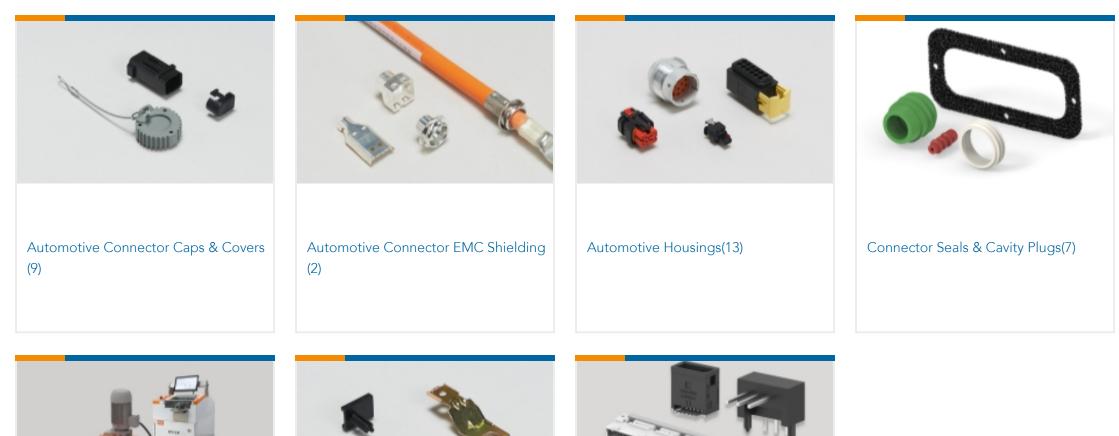

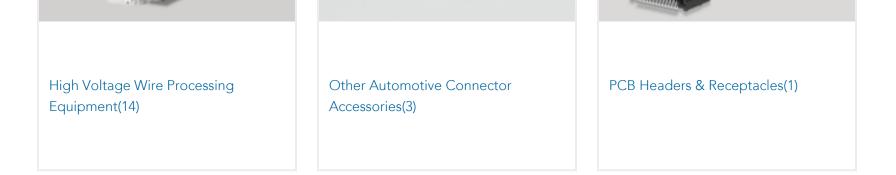

Customers Also Bought



2141265-3

Automotive Connector Caps & Covers, Cover Housing, Cable Exit Angle 180°, Orange, PA GF, -40 – 284 °F [-40 – 140 °C], HVA 630



TE Part #1587530-3 SWS,HVA 280	TE Part #2319384-1 5POS,AMP MCP 6.3/4.8K,REC INNER HSG	TE Part #2322123-3 SWS,AMP MCP 6.3/4.8K,24.9X42.7,HV CONN.	TE Part #2322224-1 REC CONN CVR,5POS,AMP MCP 6.3 /4.8K
TE Part #2364031-1 CHARGE INLET HSG,DC SINGLE WIRE SEAL	TE Part #3-2840672-1 PLUG SUB ASSY HC-STAK 25-PHI,, CONN KIT		

Documents

Product Drawings COVER,SEAL

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_2141265-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2141265-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2141265-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English