


OEG Miniature Relay PCF

TE Internal #: 216548-1 RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF

View on TE.com >

Connectors > Modular Jacks & Plugs > RJ25 Connectors

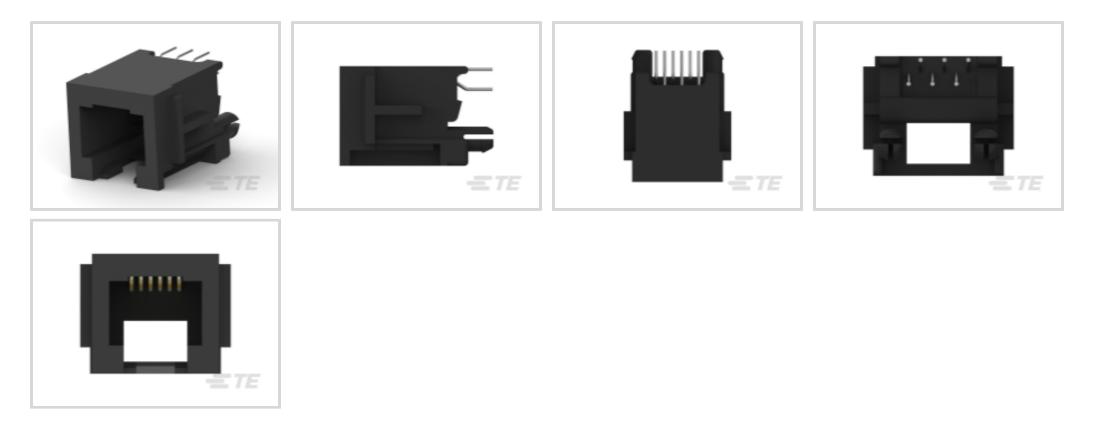

Port Configuration: Single Port Port Matrix Configuration: 1 x 1 Connector Profile: Standard Modular Jacks & Plugs Products: RJ Type Jacks & Plugs Connector Contact Density: Standard

Features



Product Type Features

Grounding Options	None				
Connector Product Type	Connector Assembly				
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs				
Modular Connector Style	Jack				
Connector System	Cable-to-Board				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Port Configuration	Single Port				
Port Matrix Configuration	1 x 1				
Connector Contact Density	Standard				
PCB Mount Orientation	Vertical				
Number of Positions	6				
Number of Loaded Positions	6				
Body Features					

RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF



Connector Profile	Standard				
Modular Jack Latch Orientation	Standard - Latch Down				
Contact Features					
Contact Underplating Material	Nickel				
Contact Base Material	Phosphor Bronze				
Contact Mating Area Plating Material	Gold				
Contact Current Rating (Max)	1.5 A				
PCB Contact Termination Area Plating Material	Tin-Lead				
Termination Features					
Termination Method to Printed Circuit Board	Through Hole - Solder				
Termination Post & Tail Length	3.1 mm[.122 in]				
Mechanical Attachment					
Panel Mount Feature Type	Panel Stops				
Mating Alignment	Without				
Connector Mounting Type	Board Mount				
Panel Mount Feature	With				

Housing Features

Mating Entry Location	Тор			
Housing Color	Black			
Housing Material	PBT			
Centerline (Pitch)	1.02 mm[.04 in]			
Dimensions				
Connector Height	16.4 mm[.646 in]			
PCB Thickness (Recommended)	1.6 mm[.062 in]			
Usage Conditions				
Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]			
Operation/Application				
Shielded	No			
Circuit Application	Signal			
Industry Standards				
Performance Category	Cat 3			
UL Flammability Rating	UL 94HB			

C For support call+1 800 522 6752

RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF



Packaging Features

Packaging Reel Diameter	60 cm			
Packaging Method	Piece/Reel, Tape Mounted on Reel			
Packaging Quantity	800			
Other				
Modular Jacks & Plugs Comment	12.70 [.500] Width			

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF






Also in the Series | OEG Miniature Relay PCF



RJ14 Connectors(2)	RJ22 Connectors(1)	RJ25 Connectors(8)	RJ45 Connectors(69)

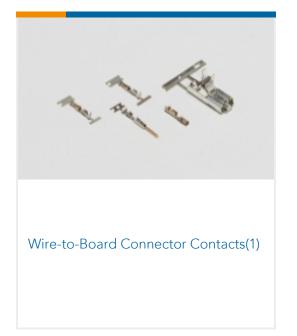

Customers Also Bought



RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF







Documents

Product Drawings 6/6 PCB MOD.JACK TE

English

CAD Files Customer View Model ENG_CVM_216548-1_A2.3d_igs.zip

English

Customer View Model

ENG_CVM_216548-1_A2.3d_stp.zip

English

Customer View Model

ENG_CVM_216548-1_A2.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English

RJ25 Connectors, Single Port, 1 x 1, Standard Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, OEG Miniature Relay PCF

