


### zQSFP+/QSFP28

TE Internal #: 2170808-6 QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb /s, zQSFP+/QSFP28

#### View on TE.com >

Connectors > Pluggable IO Connectors & Cages > QSFP, QSFP+ & zQSPF+

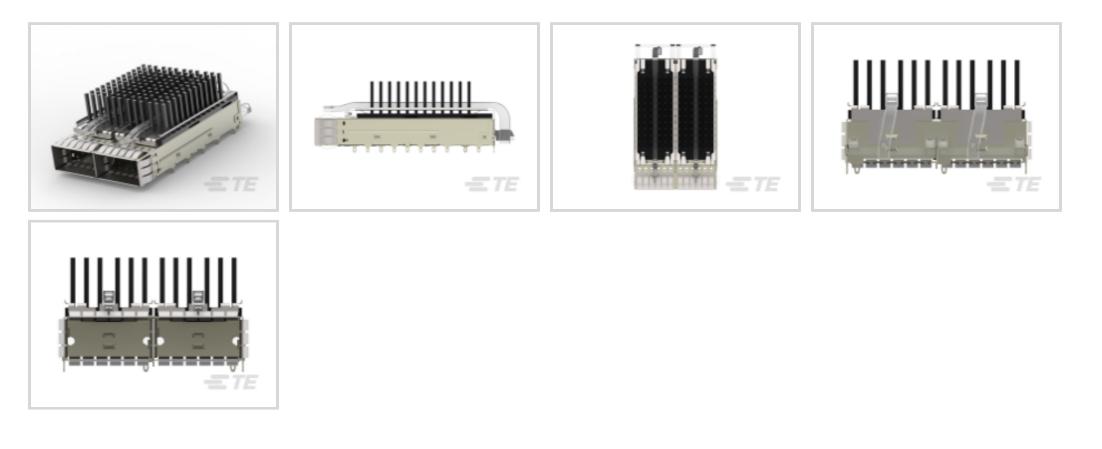

Pluggable I/O Product Type: Cage Assembly
Port Matrix Configuration: 1 x 2
EMI Containment Feature Type: Internal/External EMI Springs
Thermal Accessory Type Included: Heat Sink
Included Lightpipe: Yes

### Features



### Product Type Features

Form Factor	QSFP28/56	
Cage Type	Ganged	
Pluggable I/O Product Type	Cage Assembly	
Thermal Accessory Type Included	Heat Sink	
Connector System	Cable-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Port Matrix Configuration	1 x 2	
Number of Ports	2	
Lightpipe Configuration	Single Round	
Number of Rear EONs per Port Column	0	
Electrical Characteristics		
Data Rate (Max)	28 Gb/s	

**C** For support call+1 800 522 6752

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, zQSFP+/QSFP28



## **Body Features**

Heat Sink Finish	Anodized Black	
Heat Sink Style	Pin	
Heat Sink Height Class	Networking	
Heat Sink Height	13.5 mm[.531 in]	
Contact Features		
PCB Contact Termination Area Plating Material	Tin	
Termination Features		
Termination Post & Tail Length	2.05 mm[.081 in]	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit	
Mechanical Attachment		
Connector Mounting Type	Board Mount	
Housing Features		
Cage Material	Nickel Silver	
Dimensions		
PCB Thickness (Recommended)	1.57 mm[.062 in]	

## Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		
For Use With Pluggable I/O Products	QSFP28 Cable Assembly, QSFP28 MSA Compatible Transceiver	
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly	
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Method	Box & Tray	
Other		
EMI Containment Feature Type	Internal/External EMI Springs	
Included Lightpipe	Yes	
Enhancements	Standard	

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, zQSFP+/QSFP28



### Product Compliance

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC		
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.		

### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, zQSFP+/QSFP28



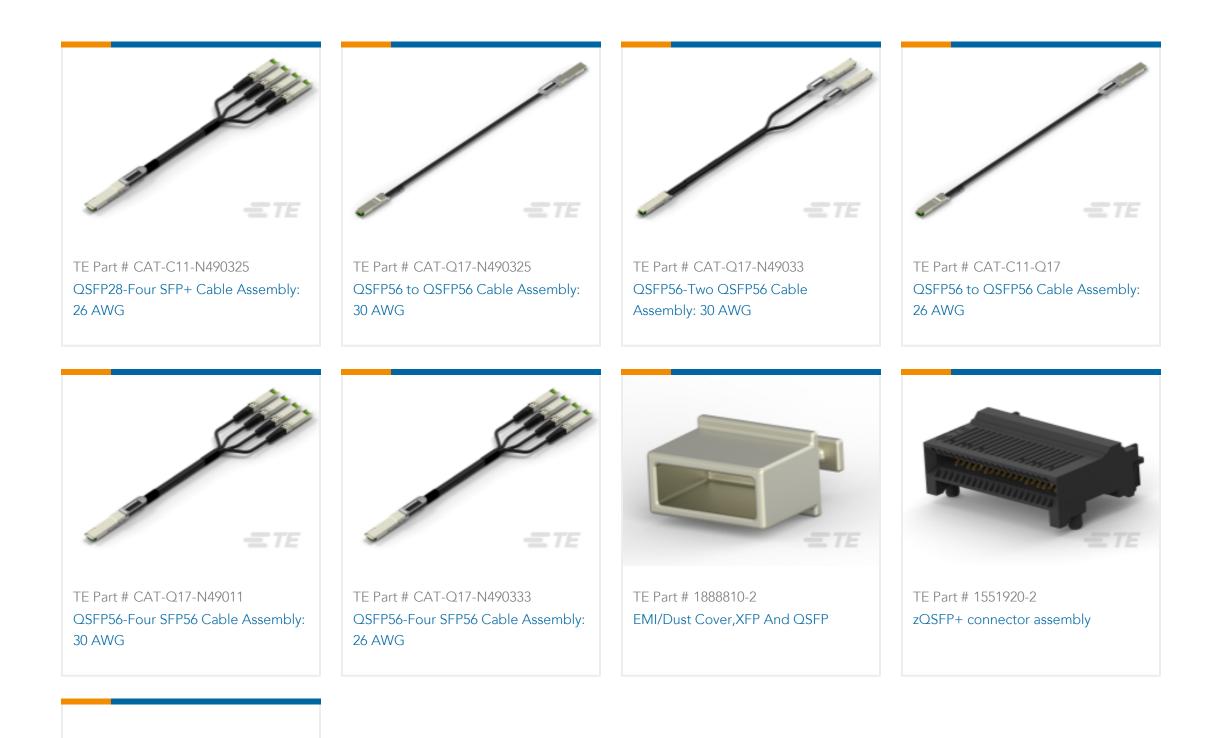

TE Part # 4-2215048-4 ASSY, SEATING TL, QSFP28, 1X2

# Also in the Series | zQSFP+/QSFP28

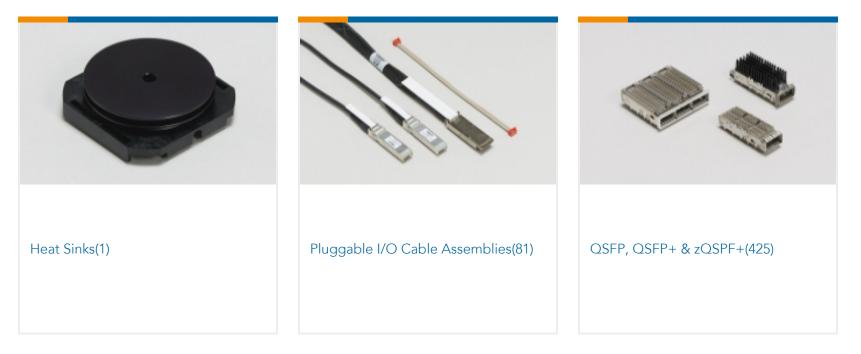

# Customers Also Bought



QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, zQSFP+/QSFP28



TE Part #1714836-1 CABLE CMDFRMA PRMA/MDF LINK	TE Part #1714846-1 INTCCPU CABLE	TE Part #1820974-1 FASTON STRAP ALIZE	TE Part #2073569-1 CPU3 TO RAC.BOX
TE Part #5-2057691-1 IMP,R3PR8C,LG0.37E,Sn	TE Part #042EJLF002 Madison Spec 101-5569 Rev. 2		

## Documents

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2170808-6\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2170808-6\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2170808-6\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications Product Specification

English

Product Environmental Compliance Product Compliance English

**Product Compliance** 

English

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, zQSFP+/QSFP28

