


CGS | CGS TJT TE Internal #: 2176250-5 4.7 Ω, Wire Wound, Power Resistor, 330 x 80 x 10 mm, 2 Termination, Loose Piece - Box, 5 %, 500 W, ±260 ppm/°C, Flying Leads Termination, CGS TJT

View on TE.com >



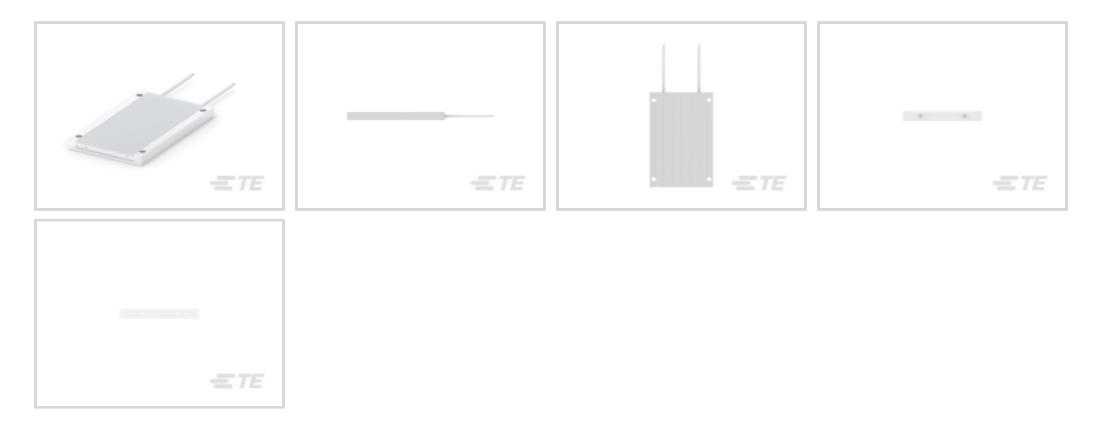

Resistor Type: Power Resistor

Passive Component Dimensions: 330 x 80 x 10 mm

Number of Terminations: 2

Packaging Method: Loose Piece - Box

Passive Component Tolerance: 5%

Features



Product Type Features

Element TypeWire WoundConfiguration Features1Number of Resistors1Passive Component Tolerance5 %Resistance ClassUp to 1kΩResistance Value4.7 ΩPower Rating500 WTermination Features2Number of Terminations2Charait Meant Devices Termination FeaturesEtrice Leads	Resistor Type	Power Resistor
Number of Resistors1Flectrical CharacteristicsPassive Component Tolerance5 %Resistance ClassUp to 1kΩResistance Value4.7 ΩPower Rating500 WTermination Features2	Element Type	Wire Wound
Electrical Characteristics Passive Component Tolerance 5% Resistance Class Up to 1kΩ Resistance Value 4.7 Ω Power Rating 500 W Termination Features 2	Configuration Features	
Passive Component Tolerance5 %Resistance ClassUp to 1kΩResistance Value4.7 ΩPower Rating500 WTermination FeaturesNumber of Terminations2	Number of Resistors	1
Resistance ClassUp to 1kΩResistance Value4.7 ΩPower Rating500 WTermination Features2	Electrical Characteristics	
Resistance Value4.7 ΩPower Rating500 WTermination Features2	Passive Component Tolerance	5 %
Power Rating500 WTermination Features2	Resistance Class	Up to 1kΩ
Termination Features Number of Terminations 2	Resistance Value	4.7 Ω
Number of Terminations 2	Power Rating	500 W
	Termination Features	
Change Mayyet Desister Terreinstien Tyres	Number of Terminations	2
Chassis Mount Resistor Termination Type Flying Leads	Chassis Mount Resistor Termination Type	Flying Leads
Mechanical Attachment	Mechanical Attachment	

TJT5004R7J

4.7 $\Omega,$ Wire Wound, Power Resistor, 330 x 80 x 10 mm, 2 Termination, Loose Piece - Box, 5 %, 500 W, ±260 ppm/°C, Flying Leads Termination, CGS TJT



Chassis Mount Resistor Mount Style	Chassis Mount
Dimensions	
Passive Component Dimensions	330 x 80 x 10 mm
Usage Conditions	
Operating Temperature Range	-25 – 250 °C
Temperature Coefficient	±260 ppm/°C
Packaging Features	
Packaging Method Product Compliance	Loose Piece - Box
Product Compliance	
Product Compliance For compliance documentation, visit the product page on TE.com>	Loose Piece - Box Compliant Compliant
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Hand solderable with lead free solder

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


TJT5004R7J

4.7 Ω, Wire Wound, Power Resistor, 330 x 80 x 10 mm, 2 Termination, Loose Piece -Box, 5 %, 500 W, ±260 ppm/°C, Flying Leads Termination, CGS TJT






Also in the Series | CGS TJT



Customers Also Bought



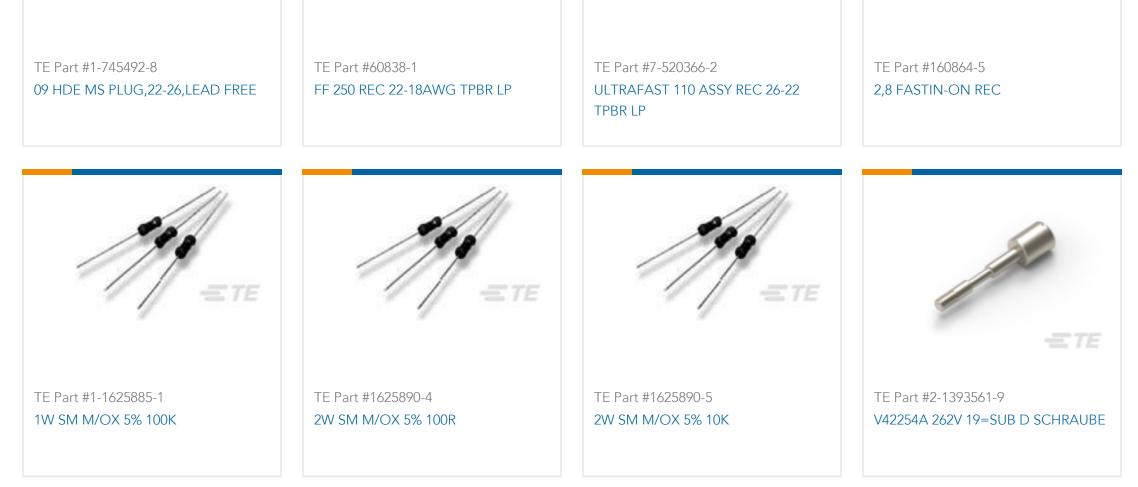



TJT5004R7J

4.7 Ω, Wire Wound, Power Resistor, 330 x 80 x 10 mm, 2 Termination, Loose Piece -Box, 5 %, 500 W, ±260 ppm/°C, Flying Leads Termination, CGS TJT



Documents

Product Drawings TJT 500W 4R7 5%

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2176250-5_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2176250-5_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2176250-5_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ALUMINIUM ENCLOSED POWER RESISTORS - Type TJT Series

English

TJT-0715

English