## HCH335J10RJ ✓ ACTIVE

### CGS | CGS HCH

TE Internal #: 2176466-1

10  $\Omega$ , Wire Wound, Power Resistor, 335 x 60 x 30 mm, 2


Termination, Loose Piece - Box, .05 %, 500 W, ±200 ppm/°C, Flying

Leads Termination, CGS HCH

View on TE.com >



Passive Components > Resistors > Chassis Mount Resistors > Aluminium Housed Braking Resistor: IP54, 200W~500W Power - HCH Series

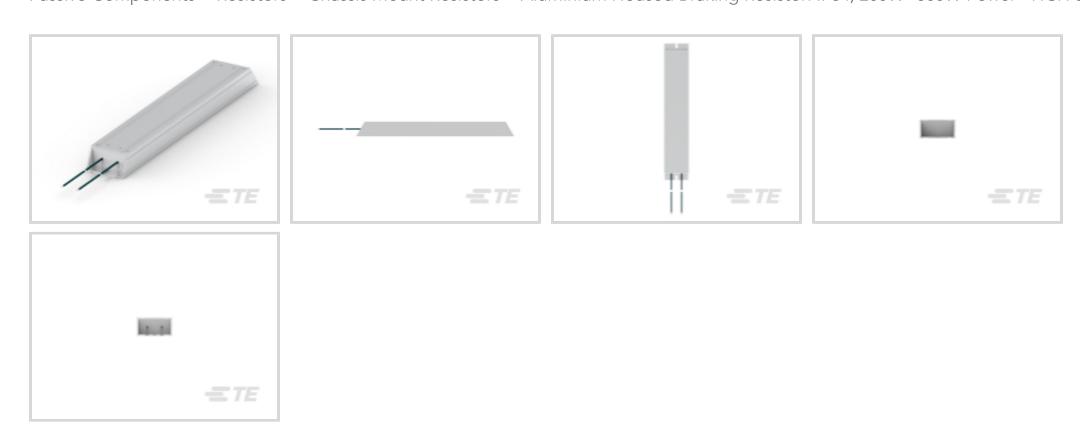

Resistor Type: Power Resistor

Passive Component Dimensions: 335 x 60 x 30 mm

Chassis Mount Resistor Termination Type

Number of Terminations: 2

Packaging Method: Loose Piece - Box
Passive Component Tolerance: .05 %

All Aluminium Housed Braking Resistor: IP54, 200W~500W Power - HCH Series (34)

### **Features**

### **Product Type Features**

Resistor Type	Power Resistor
Element Type	Wire Wound
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	.05 %
Resistance Class	Up to $1k\Omega$
Resistance Value	10 Ω
Power Rating	500 W
Termination Features	
Number of Terminations	2

Flying Leads



#### Mechanical Attachment

Chassis Mount Resistor Mount Style	Chassis Mount
Dimensions	
Passive Component Dimensions	335 x 60 x 30 mm
Usage Conditions	
Temperature Coefficient	±200 ppm/°C
Packaging Features	
Packaging Method	Loose Piece - Box

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Hand solderable with lead free solder

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**






### Also in the Series | CGS HCH

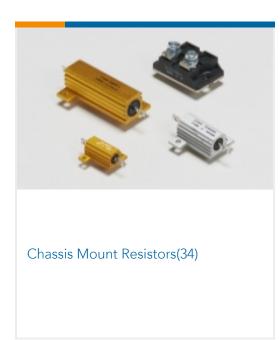

# Customers Also Bought



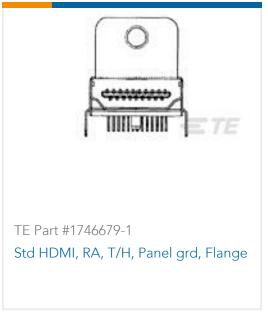



### **Documents**

**Product Drawings** 

HCH335 500W 10R 5% LEAD

English

#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2176466-1\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2176466-1\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2176466-1\_A.3d\_stp.zip

10  $\Omega$ , Wire Wound, Power Resistor, 335 x 60 x 30 mm, 2 Termination, Loose Piece - Box, .05 %, 500 W, ±200 ppm/°C, Flying Leads Termination, CGS HCH



### English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

Aluminium Housed Braking Resistor Type HCH Series

English