

TE Internal #: 2202508-4 Mini-SAS HD to External Mini-SAS Cable Assembly, 16 Positions, 9.84 ft [3 m], 6 Gb/s, Black Cable, Shielded, 28 AWG, .081 mm² View on TE.com >



Cable Assemblies > Copper Cable Assemblies > Pluggable I/O Cable Assemblies



Cable Assembly Type: Mini-SAS HD to External Mini-SAS

Equalized: No

Wire Size: .081 mm²

Outside Cable Diameter: 7.87 mm [.31 in]

Features

Product Type Features

Latching Style

Pull Tab Release

Cable Assembly Category	High Speed, Industry Standard
Cable Assembly Type	Mini-SAS HD to External Mini-SAS
Connector Type (End A)	Mini-SAS HD Plug
Connector Type (End B)	External Mini-SAS Plug
Cable Style	Madison TurboTwin, Madison TurboTwin - Round Jacketed
Configuration Features	
Number of Positions	16
Number of Pairs	8
Number of Signal Positions	16
Signal Characteristics	
Data Rate	6 Gb/s
Body Features	
Shield Material	Aluminum/Polyester Tape/Tin-Plated Copper Braid

2202508-4

Mini-SAS HD to External Mini-SAS Cable Assembly, 16 Positions, 9.84 ft [3 m], 6 Gb/s, Black Cable, Shielded, 28 AWG, .081 mm²



Jacket Material	Flexible PVC
Equalized	No
Cable Color	Black
Contact Features	
Contact Mating Area Plating Material	Gold
Mechanical Attachment	
Mating Alignment	Without
Housing Features	
Housing Material	Tin-Plated Zinc Diecast
Dimensions	
Wire Size	.081 mm²
Outside Cable Diameter	7.87 mm[.31 in]
Operation/Application	
Shielded	Yes
Halogen Free	Yes
Other	
Cable Assembly Configuration	Double Ended

Cable Assembly Configuration

Cable Assembly Length

3 m[9.84 ft]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUN 2011 (51) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

C For support call+1 800 522 6752

2202508-4

Mini-SAS HD to External Mini-SAS Cable Assembly, 16 Positions, 9.84 ft [3 m], 6 Gb/s, Black Cable, Shielded, 28 AWG, .081 mm²




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 2202508-2 C/A, 4X MINISAS HD TO MINISAS, 28AWG, 1M

Customers Also Bought

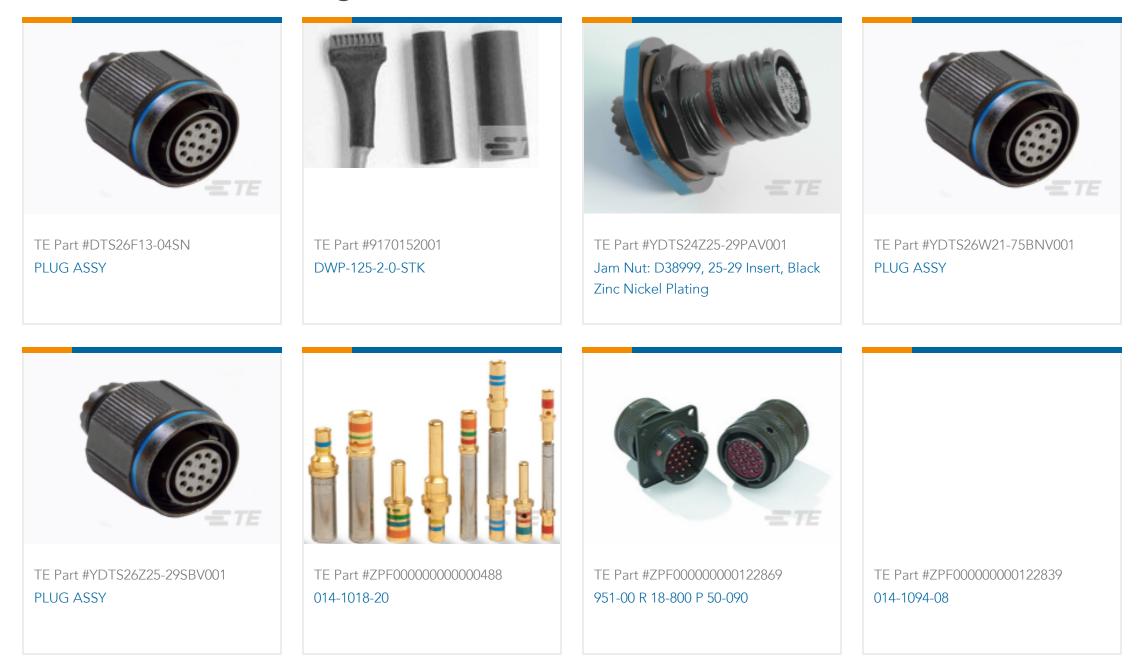

Documents

Product Drawings C/A, 4X MINISAS HD TO MINISAS, 28AWG, 3M

2202508-4

Mini-SAS HD to External Mini-SAS Cable Assembly, 16 Positions, 9.84 ft [3 m], 6 Gb/s, Black Cable, Shielded, 28 AWG, .081 mm²



English CAD Files 3D PDF 3D Customer View Model ENG_CVM_CVM_2202508-4_D.2d_dxf.zip English Customer View Model ENG_CVM_CVM_2202508-4_D.3d_igs.zip English Customer View Model ENG_CVM_CVM_2202508-4_D.3d_igs.zip English

Datasheets & Catalog Pages 7-1773461-9_MINI_SAS_HD_INTERCONNECT

English