


FORGE

TE Internal #: 2212305-1 Rectangular Power Connectors, Connector Assembly, Plug, Wire-to-Panel, 6 Position, 250 mm [9.84 in] Centerline, Wire & Cable, UL 94V-0

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

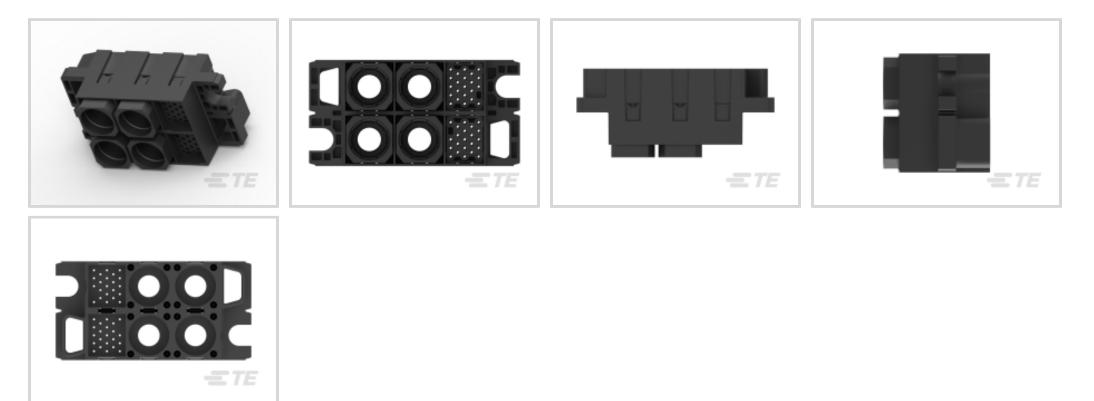

Rectangular Power Connector Type: Connector Assembly

Connector & Housing Type: Plug

Connector System: Wire-to-Panel

Number of Positions: 6

Centerline (Pitch): 250 mm [9.84 in]

Features

connectivity

Product Type Features

Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Plug
Connector System	Wire-to-Panel
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	6
Number of Rows	2
Body Features	
Cable Exit Angle	180°
Connector Profile	Standard
Contact Features	
Contact Retention Within Housing	With

2212305-1

Rectangular Power Connectors, Connector Assembly, Plug, Wire-to-Panel, 6 Position, 250 mm [9.84 in] Centerline, Wire & Cable, UL 94V-0



Contact Type	Pin
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Alignment Type	Blindmate
Mating Alignment	With
Panel Mount Feature	With
Panel Mount Feature Type	Screw Mount
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	250 mm[9.84 in]
Housing Color	Black
Housing Material	Polyester GF
Dimensions	
Panel Thickness (Recommended)	1.5 – 1.78 mm[.59 – .7 in]
Connector Height	42 mm[1.654 in]
Product Width	37.6 mm[1.48 in]
Product Length	84 mm[3.307 in]
Row-to-Row Spacing	21 mm[.827 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Shielded	No
Circuit Application	Power & Signal
Identification Marking	
Circuit Identification Feature	Without
Industry Standards	
UL Rating	Certified
Approved Standards	UL 1977
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

2212305-1

Rectangular Power Connectors, Connector Assembly, Plug, Wire-to-Panel, 6 Position, 250 mm [9.84 in] Centerline, Wire & Cable, UL 94V-0



Packaging Features

Packaging Method	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

2212305-1

Rectangular Power Connectors, Connector Assembly, Plug, Wire-to-Panel, 6 Position, 250 mm [9.84 in] Centerline, Wire & Cable, UL 94V-0





Documents

Product Drawings

FORGE, ASSY PIN, 4#0-0#4-0#8-0#12-2#22

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2212305-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2212305-1_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2212305-1_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773875-1_FORGE_DRAWER_CONNECTORS_CN

3-1773463-3_FORGE_DRAWER_CONNECTORS

English

Product Specifications Application Specification

English

Application Specification

English