227161-1 - ACTIVE

TE Internal #: 227161-1 BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Panel / Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount

View on TE.com >



Connectors > RF Connectors > Coax Connectors > BNC RF Connector: Male (Jack), Right Angle



RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in]

Impedance: 50Ω

RF Connector Coupling Mechanism: Bayonet

All BNC RF Connector: Male (Jack), Right Angle (42)

Features

Product Type Features

Connector Shape	Circular	
RF Interface	BNC	
RF Connector Style	Jack	
Connector System	Cable-to-Board, Cable-to-Panel	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
PCB Mount Orientation	Right Angle	
Number of Positions	1	
Number of Coaxial Contacts	1	
Electrical Characteristics		
Impedance	50 Ω	
Body Features		

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Panel / Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Body Material	VALOX	
Body Plating Material	Nickel	
Contact Features		
RF Connector Center Contact Plating Material	Tin	
RF Connector Center Contact Material	Phosphor Bronze	
Termination Features		
Termination Post & Tail Length	4.11 mm[.162 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Panel Attachment Style	Rear Mount	
PCB Mount Retention	With	
Panel Mount Feature Type	Lockwasher and Nut	
RF Connector Coupling Mechanism	Bayonet	
Connector Mounting Type	Panel Mount	
RF Contact Captivation Method	Mechanical	
Detent	With	

Housing Features

Housing Color	White	
Dimensions		
Mounting Post Length	3.48 mm[.137 in]	
Profile Height from PCB	15.88 mm[.625 in]	
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]	
Usage Conditions		
Insulation Option	Uninsulated	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]	
Operation/Application		
Operating Frequency	4 GHz	
Packaging Features		
Packaging Method	Tube	
Other		
RF Connector Comment	If an Insulating Bushing is required, see Part Number 330620.	

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Panel / Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Additional Features

Grade

Dielectric Material

Hardware Included

Commercial

Polymethylpentene

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

Halogen Content

Solder Process Capability

Compliant with Exemptions Compliant with Exemptions Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) Aticle Safe Usage Statements Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Panel / Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



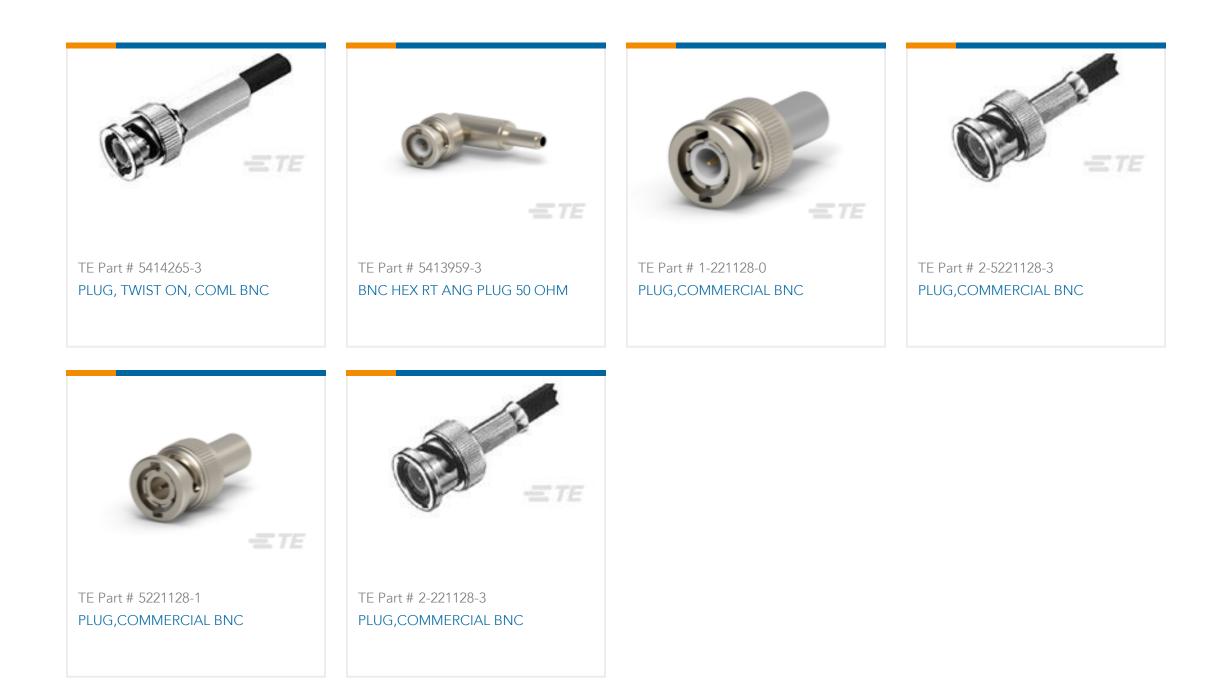

Customers Also Bought



A/L UNIV HDR 40P VERT LG LAT	09 RCPT SP/FMS STD	25 PLUG RA/MS 454	25 RCPT SP/FMS STD
TE	TE		ETE
TE Part #5747301-2 37 RCPT SP/FMS STD	TE Part #747299-2 15 RCPT SP/FMS STD	TE Part #5-1625999-9 HSC100 36R 5%	TE Part #2-1393117-4 KUP-11A25-120=KU
83 222			

TE Part #1879501-3
TE Part #2-1768393-1

CRGH2512 5% 1R2 2W
Image: CRGH2512 fm and the second sec

Documents

BNC RF Interface, Jack, 50 $\Omega,$ Bayonet, 4 GHz Operating Frequency, Cable-to-Panel / Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_227161-1_AV.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_227161-1_AV.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_227161-1_AV.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Product Specification

English

Product Specification

English

Product Environmental Compliance MD_227161-1_09062017254_dmtec

English

MD_227161-1_09062017254_dmtec

English

Instruction Sheets Instruction Sheet (U.S.) English