

2273124-3 ✓ ACTIVE

TE Internal #: 2273124-3

M8 to M12 Cable Assembly, 3 Position, 1 m, Sensor/Actuator, Code A, M8 Plug, M12 Socket, Double Ended, Plastic

[View on TE.com >](#)



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M8 Male Straight to Female LED Double Ended Cable



M8/M12 Application Type: **Sensor/Actuator**

Number of Positions: **3**

Connector & Keying Code: **A**

Connector Type (End A): **M8 Plug**

Connector Type (End B): **M12 Socket**

[All M8 Male Straight to Female LED Double Ended Cable \(20\)](#)

Features

Product Type Features

| | |
|------------------------|------------|
| Connector Type (End A) | M8 Plug |
| Connector Type (End B) | M12 Socket |
| Cable Assembly Type | M8 to M12 |

Configuration Features

| | |
|-----------------------|-----|
| Status Indicator Type | LED |
| Number of Positions | 3 |

Electrical Characteristics

| | |
|-------------------|--------|
| Operating Voltage | 24 VDC |
|-------------------|--------|

Body Features

| | |
|-------------------------|--------------------|
| Cable Color | Black |
| Connector Color (End B) | Black |
| Connector Color (End A) | Black |
| Jacket Material | PUR |
| Wire Color (Base) | Brown, Blue, Black |
| Connector & Keying Code | A |

Contact Features

| | |
|------------------------------|-----|
| Contact Current Rating (Max) | 4 A |
|------------------------------|-----|



Mechanical Attachment

| | |
|-------------------------------|-------------|
| Thread Size | M8 x M8 |
| Connector Orientation (End A) | Right Angle |
| Connector Orientation (End B) | Straight |

Housing Features

| | |
|------------------|---------|
| Housing Material | Plastic |
|------------------|---------|

Dimensions

| | |
|------------------------|----------------------|
| Outside Cable Diameter | 4.1 mm[.161 in] |
| Wire Size | .326 mm ² |

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 80 °C[-40 – 176 °F] |
|-----------------------------|---------------------------|

Operation/Application

| | |
|-------------------------|-----------------|
| M8/M12 Application Type | Sensor/Actuator |
| Shielded | No |

Packaging Features

| | |
|--------------------|-----|
| Packaging Quantity | 25 |
| Packaging Method | Box |

Other

| | |
|------------------------------|--------------|
| Field Serviceable | Yes |
| Cable Assembly Length | 1 m |
| Cable Assembly Configuration | Double Ended |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC |

Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # T4051220003-003
M8 CABLE RA MALE 1.5M 3P PUR
CABLE

Customers Also Bought




TE Part #86-015G-C
15 PSIG MV PRESSURE SENSOR

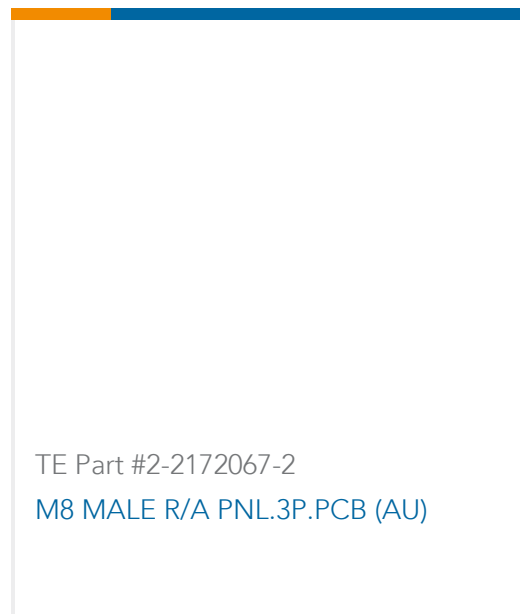

TE Part #2-2172067-2
M8 MALE R/A PNL.3P.PCB (AU)



TE Part #SL630-C01
5-24VDC, TTL(HI=DRY)OUT

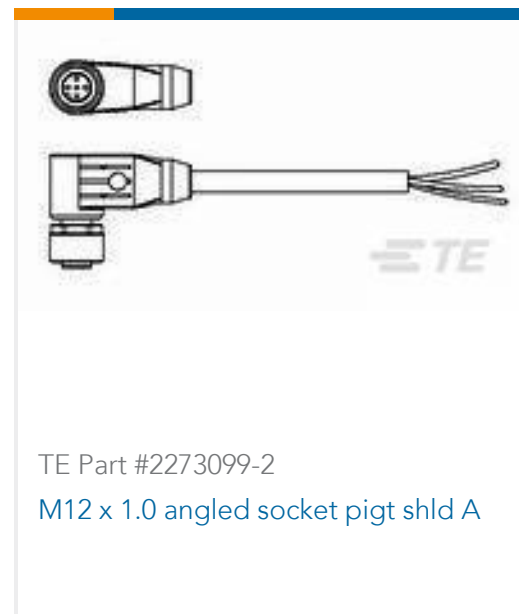

TE Part #2273099-2
M12 x 1.0 angled socket pigtail



TE Part #9-1437621-7
KLN500A1/8=KNOB KNURL W/IND LI



TE Part #2217000-2
MODEL G II CE TERMINATOR, W /CQM



TE Part #647000-2
02P MTA100 PSTD CONN ASSY SN



TE Part #3-641311-4
04P MTA-100 ASSY TAPE LF

Documents

Product Drawings



M8 angled scket to M8 strght plug 2 LED

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2273124-3_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2273124-3_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2273124-3_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

Product Specifications

Product Specification

English