
2286211-3 - ACTIVE

TE Internal #: 2286211-3 PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 2.4 mm [.094 in], Length 4 mm [.157 in], Width 1.7 mm [.067 in]

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > PCB Spring Contacts

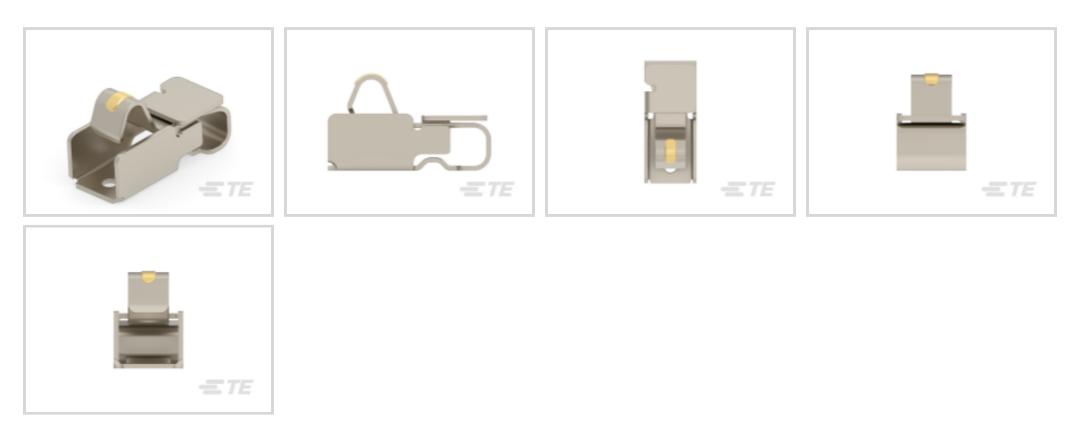

Spring Finger Type: Preloaded - C-Clip

Scalable: No

Side Protected: Yes

Uncompressed Height: 2.4 mm [.094 in]

Product Length: 4 mm [.157 in]

Features

Product Type Features

Spring Finger Type	Preloaded - C-Clip
Scalable	No
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Side Protected	Yes
Number of Positions	1
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Working Range (Low)	1.4 mm[.055 in]
Contact Working Range (Low) Contact Working Range (High)	1.4 mm[.055 in] 2 mm[.079 in]

2286211-3

PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 2.4 mm [.094 in], Length 4 mm [.157 in], Width 1.7 mm [.067 in]



Contact Current Rating (Max)	4.2 A
Dimensions	
Uncompressed Height	2.4 mm[.094 in]
Product Length	4 mm[.157 in]
Product Width	1.7 mm[.067 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	5000
Packaging Method	Tape & Reel
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

2286211-3


PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 2.4 mm [.094 in], Length 4 mm [.157 in], Width 1.7 mm [.067 in]



Compatible Parts



Customers Also Bought

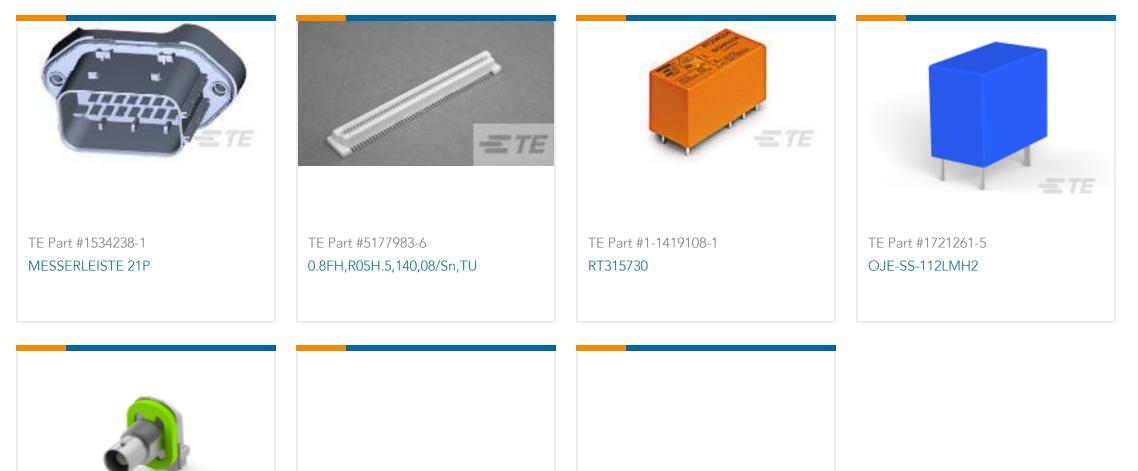



Documents

Product Drawings HIGH CURRENT SPRING FINGER

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2286211-3_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2286211-3_A1.3d_igs.zip

English

Customer View Model

C For support call+1 800 522 6752

2286211-3

PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 2.4 mm [.094 in], Length 4 mm [.157 in], Width 1.7 mm [.067 in]



ENG_CVM_CVM_2286211-3_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Environmental Compliance MD_2286211-3_11032017050_dmtec

English

MD_2286211-3_11032017050_dmtec

English