AVC16LAIOFE1DT5B04 V ACTIVE

Alcoswitch | Alcoswitch AVC16

TE Internal #: 2342833-1

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Anti-Vandal, Single Actuator, Flush Actuator Profile,

Alcoswitch AVC16

View on TE.com >



Relays, Contactors & Switches > Switches > Push Button Switches











Configuration (Pole-Throw): Single Pole - Single Throw

Push Button Switch Product Type: Anti-Vandal

Number of Actuators: Single

Actuator Profile: Flush
Bushing Style: Threaded

Features

Product Type Features

| Switch Type | Pushbutton |
|---------------------------------|-------------|
| Dust Proof | Yes |
| Push Button Switch Product Type | Anti-Vandal |
| Illuminated | Yes |
| Actuator Style | Round |

Configuration Features

| ESD Grounding Terminal | Without |
|----------------------------|-------------------------------------|
| Ganged | No |
| Panel Cutout Size | 16 (Diameter) mm[.63 (Diameter) in] |
| Configuration (Pole-Throw) | Single Pole - Single Throw |
| Number of Actuators | Single |
| Operating Function | On Off |

Electrical Characteristics

| Push Button Switch Voltage Rating | 5 – 24 VDC | |
|-----------------------------------|------------|--|



Body Features

| Cap Color | Silver |
|---------------------|-----------|
| Seal Type | Ероху |
| Actuator Force | 0 g[0 oz] |
| Case Material | Aluminum |
| Actuator Material | Aluminum |
| Actuator Profile | Flush |
| Bushing Style | Threaded |
| Bushing Thread Size | M16 x 1 |
| Actuator Color | Silver |
| Contact Footunes | |

Contact Features

| Type of Contact | 1 pole, NO |
|---|------------|
| Push Button Switch Contact Current Rating | 1 A |

Termination Features

| Termination Type | Long Leads |
|------------------|------------|

Mechanical Attachment

| Attachment Method | Screw-On |
|----------------------------------|----------|
| Mounting Angle | Vertical |
| Thread Size | M16 x 1 |
| Push Button Switch Mounting Type | Panel |

Housing Features

| Low Profile | Yes |
|-------------|-----|
|-------------|-----|

Dimensions

| Bushing Diameter | 16 mm[.63 in] |
|------------------|---------------|
| Bushing Length | 15 mm[.59 in] |

Usage Conditions

| Oil-Tight | No |
|--------------------|----------|
| Temperature Rating | Standard |
| | |

Industry Standards

| IP Rating | IP68 | |
|-----------|------|--|
|-----------|------|--|

Packaging Features



| Packaging Method | Loose Piece |
|------------------|-------------|
|------------------|-------------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts









Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Anti-Vandal, Single Actuator, Flush Actuator Profile, Alcoswitch AVC16










Also in the Series | Alcoswitch AVC16

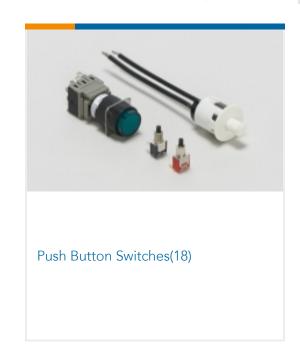

Customers Also Bought















Documents

Product Drawings

AVC16L FLAT AIO RGB RL 500MM/2X3

English

CAD Files

3D PDF

3D

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Anti-Vandal, Single Actuator, Flush Actuator Profile, Alcoswitch AVC16



Customer View Model

ENG_CVM_CVM_2342833-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2342833-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2342833-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages

AVC Series - Anti-Vandal Illuminated Capacitive Switches

English