

2343403-1 ✓ ACTIVE

LUMAWISE | LUMAWISE Endurance S

TE Internal #: 2343403-1

Zhaga Book 18 Street Lighting Connectors, Shorting Cap, Black,  
Height 29.6 mm, Not Vented / Keyed, UL, 4 Position, Sealable,  
LUMAWISE Endurance S

[View on TE.com >](#)



Connectors > Lighting Connectors > Street Lighting Controls > Zhaga Book 18 Street Lighting Connectors



Lighting Product Type: **Shorting Cap**

Primary Product Color: **Black**

Product Height: **29.6 mm**

Lighting Connector Features Included: **Keyed, Not Vented**

Agency/Standard: **UL**

## Features

### Product Type Features

Lighting Product Type	Shorting Cap
Sealable	Yes

### Configuration Features

Lighting Connector Features Included	Keyed, Not Vented
Number of Positions	4

### Body Features

Primary Product Color	Black
-----------------------	-------

### Contact Features

Contact Current Rating (Max)	5 A
------------------------------	-----

### Dimensions

Product Diameter	36.5 mm
Product Height	29.6 mm

### Usage Conditions



Operating Temperature Range	-40 – 90 °C
-----------------------------	-------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

Agency/Standard	UL
-----------------	----

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # 1-2343404-1  
MODULE ASSY, 80MM LUMAWISE S, KEYED, vented



TE Part # 2341474-1  
SEALING CAP, RCPT, LUMAWISE ENDURANCE S



TE Part # 2343405-1  
MODULE, 40MM LUMAWISE ENDURANCE S. KEYED



TE Part # 2-2343404-1  
MODULE, 80MM LUMAWISE ENDURANCE S, KEYED




TE Part # 2341474-2  
SEALING CAP, RCPT, LUMAWISE ENDURANCE S



TE Part # 2382635-1  
LUMAWISE POWER INPUT TERMINAL BLOCK (TB)


Also in the Series | LUMAWISE Endurance S

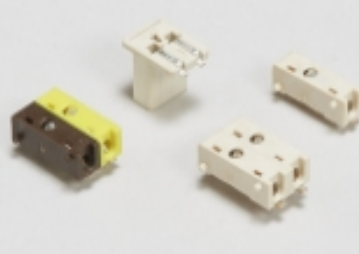

Poke-In Connectors(1)



Street Lighting Power Management(1)




Zhaga Book 18 Street Lighting Connectors(35)

Customers Also Bought



TE Part #6609021-4  
2VB3=F7123 S0



TE Part #2213627-2  
Dimming Receptacle, Rotatable



TE Part #2834049-3  
REC, 2P LATCHED POKE-IN WTW CONN.OE



TE Part #2213626-1  
GASKET, SEALING ROT DIM RECEPT



TE Part #2213858-1  
RECEPTACLE ASSEM., LUMAWISE ENDURANCE S



TE Part #DTM12S-BT  
BOOT, 12P, PLG, ST, GRY



TE Part #2213362-4  
RCPT ASSY, DIMMABLE PHOTOCONTROL, 105C, 3/4



TE Part #2341474-3  
SEALING CAP, RCPT, LUMAWISE ENDURANCE S



## Documents

### Product Drawings

[RECEPTACLE, LUMAWISE ENDURANCE S, KEYED](#)

English

---

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2343403-1\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2343403-1\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2343403-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE](#)

English

[Datasheet - Lumawise Z10](#)

English

[Lumawise Endurance S Modules](#)

English

---

### Product Specifications

[Application Specification](#)

English

---

### Agency Approvals

[UL\\_EU\\_CERT\\_EN\\_61984\\_UL\\_EU\\_01778\\_M1\\_C1](#)

English

[CB\\_CERT\\_US\\_34131\\_M1\\_UL\\_4788988643\\_TR\\_C1](#)

English

[CB\\_CERT\\_IEC\\_61984\\_US\\_34131\\_M1\\_UL\\_C1](#)

English