
HCP20DTD2H04 ACTIVE

TE Internal #: 2435261-5 Snap Action Switches, Single Pole - Double Throw Configuration (Pole-Throw), Lever, Normal Actuator Style, 20 A, 125 VAC, 250 VDC View on TE.com >



Relays, Contactors & Switches > Switches > Snap Action Switches

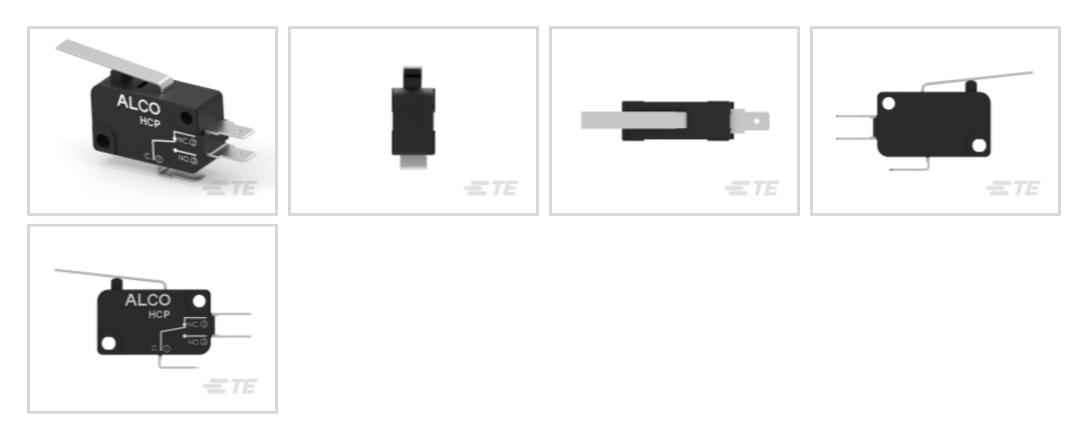

Configuration (Pole-Throw): Single Pole - Double Throw Actuator Style: Lever, Normal Snap Action Switch Contact Current Rating: 20 A

Snap Action Switch Voltage Rating: 250 VDC

Features

Product Type Features

Product Type

Switch

Switch Type	Snap Action
Actuator Style	Lever, Normal
Switch Connection Type	Quick Connect Terminal
Switch Style	Miniature
Configuration Features	
Operating Position	15.3 mm[.602 in]
Configuration (Pole-Throw)	Single Pole - Double Throw
Electrical Characteristics	
Snap Action Switch Voltage Rating	250 VDC
Body Features	
Movement Differential	1 mm[.039 in]
Releasing Force	15 g[.529 oz]
Contact Features	
Snap Action Switch Contact Current Rating	20 A

HCP20DTD2H04

Snap Action Switches, Single Pole - Double Throw Configuration (Pole-Throw), Lever, Normal Actuator Style, 20 A, 125 VAC, 250 VDC



Mechanical Attachment Snap Action Switch Mounting Angle Vertical Housing Features Housing Material PBT Dimensions Pre Travel 5.9 mm[.232 in] Operation/Application Operating Force 160 g[5.64 oz] Other	Termination Features Termination Type	.187 x .02 Quick Connect Terminals
Snap Action Switch Mounting AngleVerticalHousing FeaturesPBTHousing MaterialPBTDimensionsS9 mm[.232 in]Pre TravelS9 mm[.232 in]Operating Force160 g[5.64 oz]OtherS9 mm[.232 mm]		
Housing Features Housing Material PBT Dimensions Value Pre Travel 5.9 mm[.232 in] Operation/Application 160 g[5.64 oz] Other Value		
Housing Material PBT Dimensions 5.9 mm[.232 in] Pre Travel 5.9 mm[.232 in] Operation/Application 160 g[5.64 oz] Other 160 g[5.64 oz]	Snap Action Switch Mounting Angle	Vertical
Dimensions Pre Travel 5.9 mm[.232 in] Operation/Application Operating Force 160 g[5.64 oz] Other	Housing Features	
Pre Travel5.9 mm[.232 in]Operation/Application160 g[5.64 oz]OtherInstantion	Housing Material	PBT
Operation/Application Operating Force 160 g[5.64 oz] Other	Dimensions	
Other	Pre Travel	5.9 mm[.232 in]
Other	Operation/Application	
	Operating Force	160 g[5.64 oz]
Over Travel 1.2 mm[0/7 in]	Other	
	Over Travel	1.2 mm[.047 in]
	Product Compliance	

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

Compliant

Not Yet Reviewed

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the

HCP20DTD2H04

Snap Action Switches, Single Pole - Double Throw Configuration (Pole-Throw), Lever, Normal Actuator Style, 20 A, 125 VAC, 250 VDC



product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 2435261-6 HCP20A, Hvy Force, 0.250 Term. Norm. LVR

Documents

Product Drawings HCP20A, Hvy Force, 0.187 Term. Norm. LVR

English

CAD Files

Customer View Model

ENG_CVM_CVM_2435261-5_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2435261-5_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2435261-5_A.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ALCOSWITCH_HCP_SERIES

English