



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **3.31 – 5.26 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	9.53 mm [.375 in]
Mating Tab Thickness	1.22 mm [.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.42 mm
----------------------	---------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Locking Lance
-----------------------	---------------

Dimensions

Terminal Material Thickness	.56 mm[.022 in]
-----------------------------	-----------------

Product Length	37.4 mm[1.47 in]
----------------	------------------

Compatible Insulation Diameter Range	3.4 – 5.1 mm[.134 – .2 in]
--------------------------------------	----------------------------

Wire Size	3.31 – 5.26 mm ²
-----------	-----------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	1500
--------------------	------

Packaging Method	Strip/Reel
------------------	------------

Other

Terminals & Splices Comment	According to DIN 46343, Part 4
-----------------------------	--------------------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 280074-2 FF 375 TAB 6-10MM2 PTBR</p>	 <p>TE Part # 2150154-2 OCEAN_2.0_Applicator-E-160F250F</p>	 <p>TE Part # 7-2150154-7 OCEAN_2.0_SPARE_PART_KIT-160F250F</p>	 <p>TE Part # 2-2150154-2 OCEAN_2.0_Applicator-E-160F250F</p>
---	--	--	--

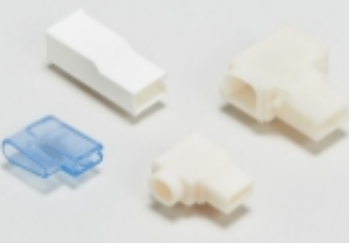Also in the Series | FASTIN-FASTON 375

 <p>Crimp Terminal Housings(9)</p>	 <p>Insertion & Extraction Tools(1)</p>	 <p>Quick Disconnects(20)</p>
---	--	--

Customers Also Bought




TE Part #T1750162129-000
H16B-TBFH-PG29




TE Part #699692-000
MTC100-JH1-P12



TE Part #1443997-1
BASE ASSEMBLY, 60 POSITION, BB

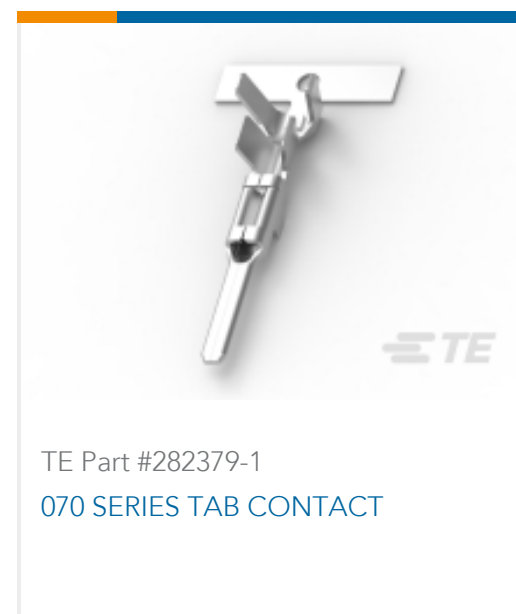

TE Part #282379-1
070 SERIES TAB CONTACT

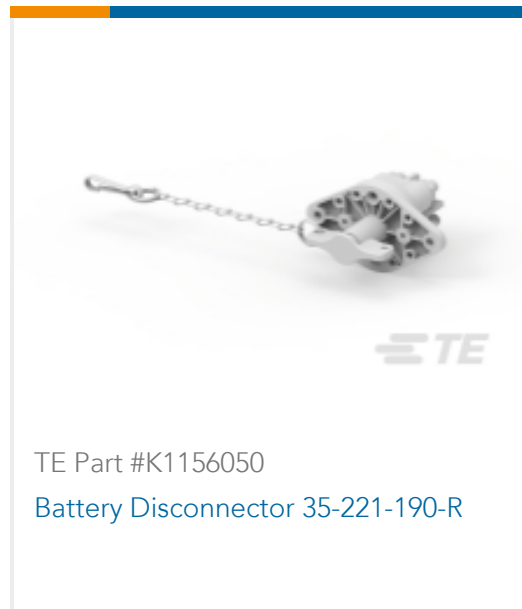


TE Part #K1156050
Battery Disconnecter 35-221-190-R




TE Part #1443996-1
COVER, 60 POSITION




TE Part #8-1618388-3
LEV200AKANA=RELAY, SPST-NO

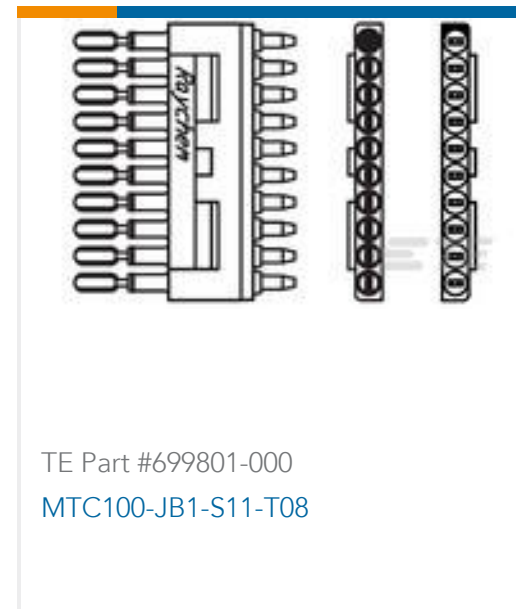

TE Part #699801-000
MTC100-JB1-S11-T08

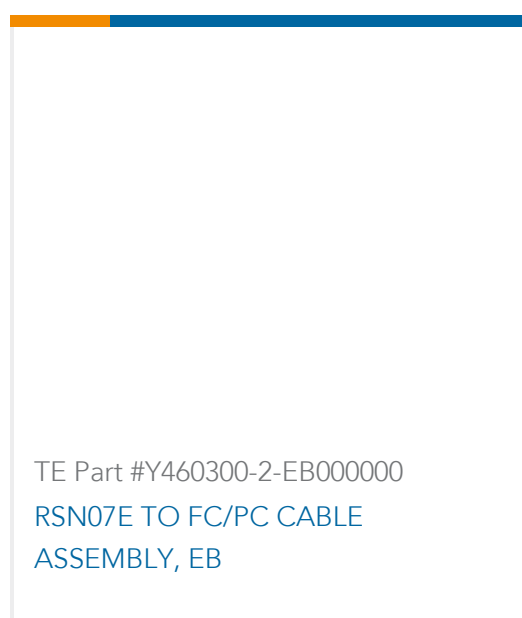

TE Part #Y460300-2-EB000000
RSN07E TO FC/PC CABLE
ASSEMBLY, EB

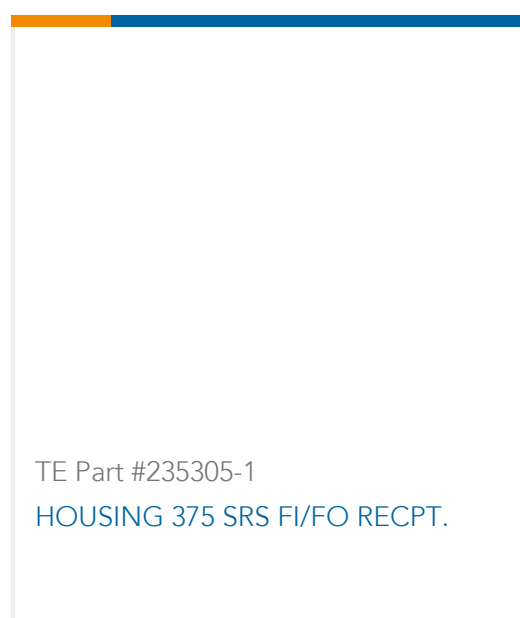

TE Part #235305-1
HOUSING 375 SRS FI/FO RECPT.

Documents

Product Drawings

[FF 375 TAB 3-6MM2 PTBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_280075-2_P.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_280075-2_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_280075-2_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

FASTIN-FASTON CONN. .110 INCH, .187 INCH, .250 INCH, .375 INCH SRS.

English

Product Specification

English

Product Specification

English

"375" SERIES FASTIN FASTON 2 POS. CONNECTOR

Japanese

Product Specification

Japanese

"375" SERIES FASTIN FASTON 2 POS. CONNECTOR

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English