

Buchanan WireMate

TE Internal #: 2834012-3 Poke-In Connectors, Wire-to-Board, Printed Circuit Board, Height . 122 in [3.1 mm], Surface Mount, 16 – 20 AWG Wire Size View on TE.com >



Connectors > Lighting Connectors > Poke-In Connectors



Connector System: Wire-to-Board

Connector & Contact Terminates To: Printed Circuit Board

Connector Height: 3.1 mm [.122 in]

Termination Method to Printed Circuit Board: Surface Mount

Wire Size: 16 – 20 AWG

Features

Product Type Features

| Product Line | Poke-In | |
|--|-----------------------|--|
| Connector System | Wire-to-Board | |
| Connector & Contact Terminates To | Printed Circuit Board | |
| Electrical Characteristics | | |
| Operating Voltage | 300 VAC | |
| Body Features | | |
| Primary Product Color | Natural | |
| | | |
| Contact Features | | |
| Contact Features PCB Contact Termination Area Plating Material Finish | Matte | |
| | Matte Nickel | |
| PCB Contact Termination Area Plating Material Finish | | |
| PCB Contact Termination Area Plating Material Finish Contact Underplating Material | Nickel | |
| PCB Contact Termination Area Plating Material Finish Contact Underplating Material PCB Contact Termination Area Plating Material | Nickel | |

C For support call+1 800 522 6752

2834012-3

Poke-In Connectors, Wire-to-Board, Printed Circuit Board, Height .122 in [3.1 mm], Surface Mount, 16 – 20 AWG Wire Size



| Compatible Insulation Diameter Range | 2.1 mm |
|--|--|
| Connector Height | 3.1 mm[.122 in] |
| Wire Size | 16 – 20 AWG |
| Industry Standards | |
| Agency/Standard | UL |
| Approved Standards | UL 1977, UL E28476 |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |
| Packaging Method | Tape & Reel |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE |

2022 (224) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 245°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


2834012-3

Poke-In Connectors, Wire-to-Board, Printed Circuit Board, Height .122 in [3.1 mm], Surface Mount, 16 – 20 AWG Wire Size





Customers Also Bought

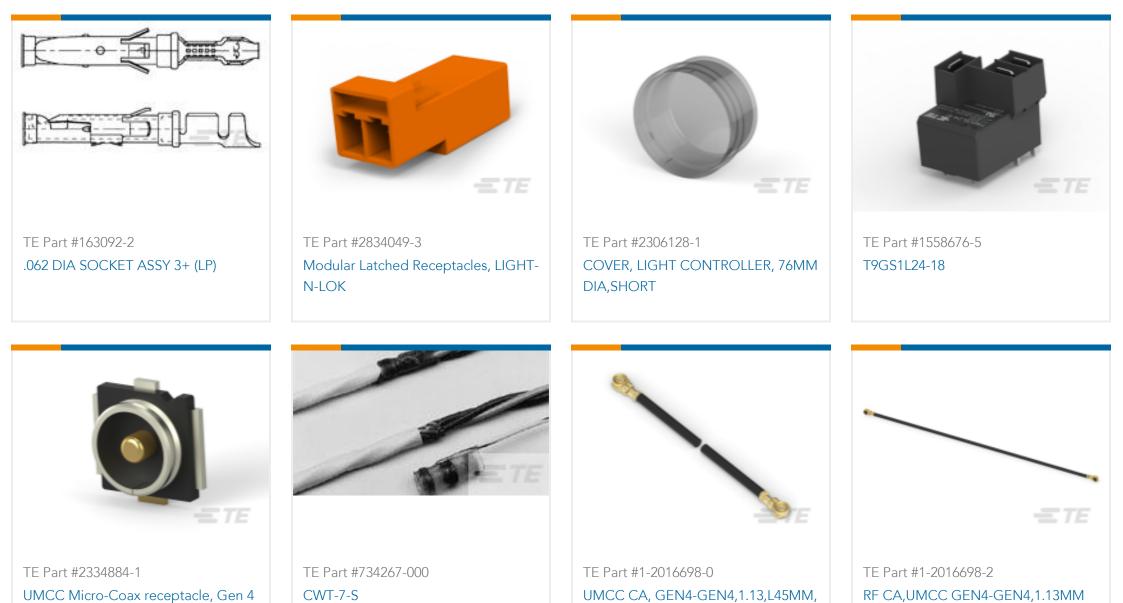

| | ВК | CABLE,L100MM |
|-------------------|----|--------------|
| | | |
| | | |
| | | |
| TE Part #468281-1 | | |
| STRIPPER | | |

Documents

Product Drawings SLIM CONTACT FOR WIRE 16-20AWG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2834012-3_A.2d_dxf.zip

2834012-3

Poke-In Connectors, Wire-to-Board, Printed Circuit Board, Height .122 in [3.1 mm], Surface Mount, 16 – 20 AWG Wire Size



English

Customer View Model ENG_CVM_CVM_2834012-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2834012-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages Slim Wire-to-Board flyer

English

Slim Wire-to-Board flyer

English

BUCHANAN WireMate Connectors Brochure

BUCHANAN WireMate Connectors Brochure

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_2834012-3_060720161114_dmtec

English

MD_2834012-3_060720161114_dmtec

English

Instruction Sheets Instruction Sheet (non U.S.)

English

Agency Approvals UL Report

English