
2834055-4 - ACTIVE

LIGHT-N-LOK | LIGHT-N-LOK Ballast Connector

TE Internal #: 2834055-4 Ballast Connectors, Connector, Poke-In, Wire-to-Wire, 3 Position, 4.5 mm Centerline, Wire & Cable, LIGHT-N-LOK Ballast Connector View on TE.com >



Connectors > Lighting Connectors > Ballast Connectors > Modular Latched Receptacles, LIGHT-N-LOK

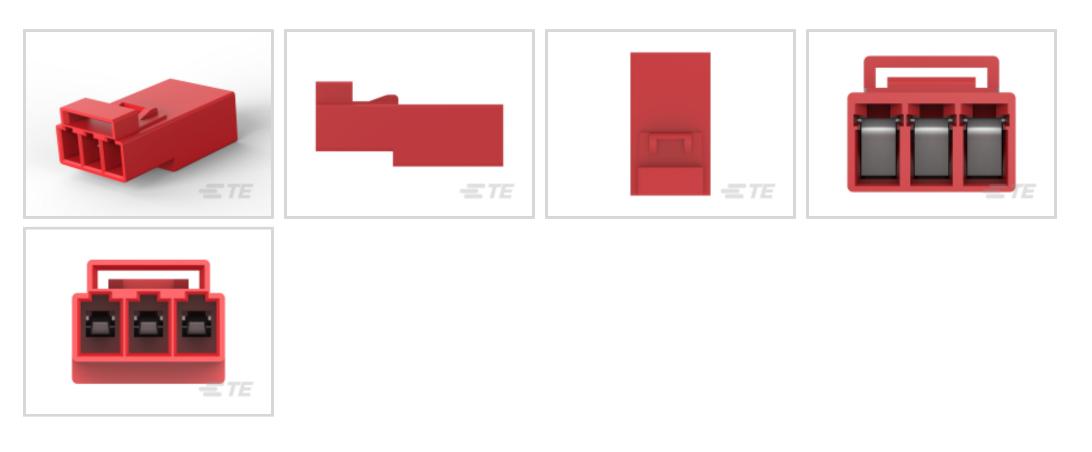

Lighting Product Type: Connector

Termination Method to Wire & Cable: Poke-In

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 4.5 mm

All Modular Latched Receptacles, LIGHT-N-LOK (16)

Features

Product Type Features

Lighting Product Type	Connector
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Rows	1
Number of Positions	3
Electrical Characteristics	
Operating Voltage (Max)	600 VAC
Body Features	
Primary Product Color	Natural
Contact Features	
Contact Current Rating (Max)	9 A

S For support call+1 800 522 6752

Ballast Connectors, Connector, Poke-In, Wire-to-Wire, 3 Position, 4.5 mm Centerline, Wire & Cable, LIGHT-N-LOK Ballast Connector



Termination Features

Termination Method to Wire & Cable	Poke-In
Mechanical Attachment	
Mating Alignment	With
Housing Features	
Centerline (Pitch)	4.5 mm
Dimensions	
Wire Size	16 – 22 AWG
Usage Conditions	
Operating Temperature Range	-40 – 105 °C
Industry Standards	
Approved Standards	UL 1977
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer	

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

Ballast Connectors, Connector, Poke-In, Wire-to-Wire, 3 Position, 4.5 mm Centerline, Wire & Cable, LIGHT-N-LOK Ballast Connector



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 2834054-4 PLUG, 3P LATCHED POKE-IN WTW CONN.RD

Also in the Series | LIGHT-N-LOK Ballast Connector





Customers Also Bought



Ballast Connectors, Connector, Poke-In, Wire-to-Wire, 3 Position, 4.5 mm Centerline, Wire & Cable, LIGHT-N-LOK Ballast Connector





Documents

Product Drawings REC, 3P LATCHED POKE-IN WTW CONN.RD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2834055-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2834055-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2834055-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

3 Position LIGHT-N-LOK Connector

English

LIGHT-N-LOK Brochure

English

3P Latched W2W Connector (Chinese)

English

Product Specifications
Application Specification

English

Instruction Sheets Instruction Sheet (non U.S.)

English

Agency Approvals LIGHT-N-LOK CB Test Certificate to IEC 61984

Ballast Connectors, Connector, Poke-In, Wire-to-Wire, 3 Position, 4.5 mm Centerline, Wire & Cable, LIGHT-N-LOK Ballast Connector



English

LIGHT-N-LOK CB Test Report to IEC 61984

English