


RAST

TE Internal #: 284932-4 Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Brown, PBT GF, Fully Loaded

View on TE.com >

Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

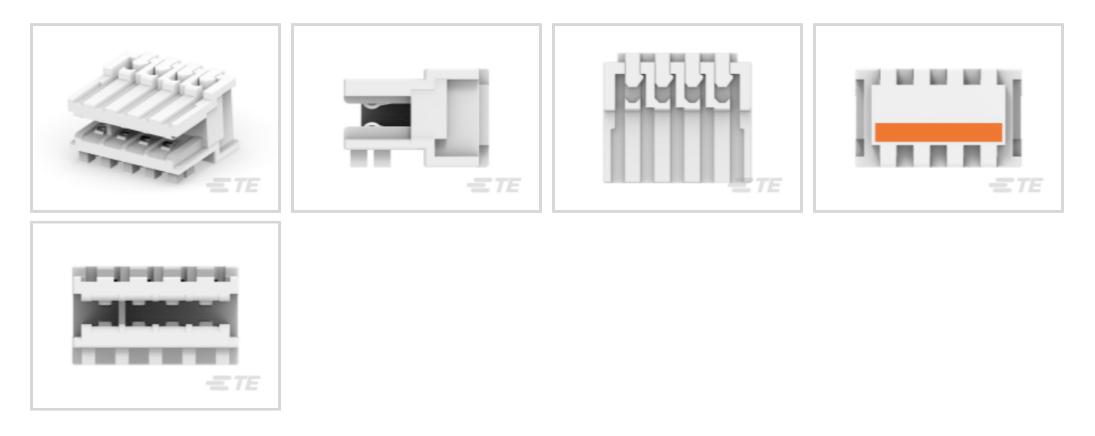

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 2.5 mm [.098 in]

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Number of Rows: 1

Features

connectivity

Product Type Features

Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Card Entry Style	Side
Number of Insulation Displacement Slots	4
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	4
	1
Number of Rows	1
Number of Rows Connector Contact Load Condition	T Fully Loaded
Connector Contact Load Condition	Fully Loaded
Connector Contact Load Condition PCB Mount Orientation	Fully Loaded

Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Brown, PBT GF, Fully Loaded



Keying Between Cavity Locations	1&2	
Primary Product Color	Brown	
Contact Features		
Contact Retention Within Housing	Without	
PCB Contact Termination Area Plating Material Thickness	4 – 10 µm	
Contact Type	Socket	
Contact Mating Area Plating Material	Tin	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Phosphor Bronze	
Contact Current Rating (Max)	2 A	
Termination Features		
Termination Method to Wire & Cable	Insulation Displacement (IDC)	
Mechanical Attachment		
Mating Alignment Type	Keyed	
Mating Retention	Without	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	Without	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Entry Configuration	Both Ends Open	
Centerline (Pitch)	2.5 mm[.098 in]	
Housing Material	PBT GF	
Dimensions		
Card Slot Depth	5 mm	
Connector Height	7.35 mm	
PCB Thickness (Recommended)	1.5 mm[.059 in]	
Compatible Insulation Diameter Range	1.3 mm[.05 in]	
Wire Size	.22 – .35 mm²	
Usage Conditions		
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]	

C For support call+1 800 522 6752

Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Brown, PBT GF, Fully Loaded



Circuit Application	Signal
Packaging Features	
Packaging Quantity	280
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Brown, PBT GF, Fully Loaded





Customers Also Bought



TE Part #7-2836138-7 KIT-

TE Part #2836138-1

TE Part #2836138-1 OCEAN_2.0_Applicator-S-055F108OV	TE Part #284932-6 DUOPLUG MKI, KEYED 2/3, 6 POS, RED	TE Part #7-2151793-7 OCEAN_2.0_SPARE_PART_KIT- 055F069OV	TE Part #7-2836138-7 OCEAN_2.0_SPARE_PART_KI 055F108OV

- TE

TE Part #284931-7

DUOPLUG Standard, female conn.

Documents

TE Part #2293372-9

AMP MONO-SHAPE PCB CONN

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_284932-4_A_c-284932-4-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_284932-4_A_c-284932-4-a.3d_igs.zip

English

Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Brown, PBT GF, Fully Loaded



Customer View Model

ENG_CVM_CVM_284932-4_A_c-284932-4-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals

Agency Approval Document

English