3-1393292-8 <

Micro Relay A TE Internal #: 3-1393292-8 Micro Relays, 24 VDC Coil Voltage, 1 Form C (CO), 430 Ω Coil Resistance, Micro Relay A

View on TE.com >



Relays, Contactors & Switches > Relays > Automotive Relays > Automotive Plug-In Relays > Micro Relays



Rated Coil Voltage: 24 VDC

Micro Relay Contact Current Class: 20 – 30 A

Micro Relay Contact Arrangement: 1 Form C (CO)

Micro Relay Coil Resistance: 430Ω

Mounting Brackets: Without

Features

Product Type Features

Relay Type

Micro Relay A/VFMA

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts

Current Rating (85°C)

500 Vrms

20 A

5.	,	

Contact Limiting Short-Time Current	150 A
Insulation Initial Dielectric Between Contacts and Coil	500 Vrms
Insulation Initial Dielectric Between Coil/Contact Class	0-500 V
Coil Power Rating (DC)	1340 mW
Coil Power Rating Class	1 – 1.5 W
Contact Limiting Making Current	120 A
Contact Limiting Continuous Current	30 A
Coil Magnetic System	Monostable, DC
Rated Voltage	24 VDC
Contact Limiting Breaking Current	20 A
Contact Switching Load (Min)	1000mA @ 5VDC
Rated Coil Voltage	24 VDC
Micro Relay Coil Resistance	430 Ω
Body Features	
Weight	16 g[.565 oz]

3-1393292-8

Micro Relays, 24 VDC Coil Voltage, 1 Form C (CO), 430 Ω Coil Resistance, Micro Relay A



Contact Features

Terminal Type	Plug-In, Quick Connect
Contact Base Material	Silver Alloy
Micro Relay Contact Current Class	20 – 30 A
Micro Relay Contact Arrangement	1 Form C (CO)
Mechanical Attachment	
Mounting Type	Plug-In
Dimensions	
Width Class (Mechanical)	12 – 16 mm
Height	25.4 mm[1 in]
Length Class (Mechanical)	20 – 25 mm
Height Class (Mechanical)	25 – 30 mm
Width	15.5 mm[.61 in]
Length	23 mm[.906 in]
Usage Conditions	
Environmental Ambient Temperature Class	105 – 125°C
Environmental Ambient Temperature (Max)	125 °C[257 °F]

Other

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Micro Relays, 24 VDC Coil Voltage, 1 Form C (CO), 430 Ω Coil Resistance, Micro Relay A



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Micro Relay A



Micro Relays(15)	

Customers Also Bought

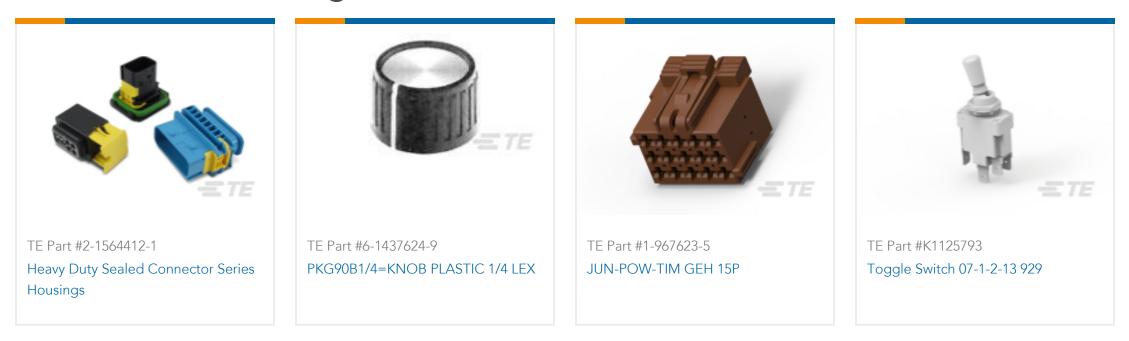

3-1393292-8

Micro Relays, 24 VDC Coil Voltage, 1 Form C (CO), 430 Ω Coil Resistance, Micro Relay A





TE Part #86501-000 FPS801 PROXIMITY SENSOR

Documents

Product Drawings V23074A1002A403-EV-CBOX

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_3-1393292-8_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1393292-8_O.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_3-1393292-8_O.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MFINITY Version AUT

English

Automotive Relay Application Notes

English

MFINITY Modular Hard Wired Fuse and Relay Box

English

Micro Relay A, Micro ISO, Plug-in

English

3-1393292-8

Micro Relays, 24 VDC Coil Voltage, 1 Form C (CO), 430 Ω Coil Resistance, Micro Relay A



Product Specifications Definitions General Purpose Relays

English