NC6-P108-06 - ACTIVE

Buchanan | Buchanan NC6

TE Internal #: 3-1437664-8 Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 6 Position, 9.53 mm [.375 in] Centerline, 1 Row, Buchanan NC6 View on TE.com >



Connectors > Terminal Blocks & Strips > Barrier Strips



Barrier Strip Style: Dual Barrier

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Number of Positions: 6

Centerline (Pitch): 9.53 mm [.375 in]

Features

Product Type Features

Block Style	Flat Bottom with standoffs				
Connector System	Wire-to-Board				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Number of Levels	1				
Number of Positions	6				
Number of Rows	1				
Electrical Characteristics					
	300 V				
Operating Voltage	300 V				
Operating Voltage Body Features	300 V				
	300 V Low				
Body Features					
Body Features Terminal Profile	Low				

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 6 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



Contact Features

PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	20 A
Termination Features	
Bottom Termination Type	Printed Circuit Pin
Mechanical Attachment	
Screw Head Type	Wire Clamp Combo Head
Screw Plating Material	Zinc
Screw Material	Steel
Top Termination Type	Wire Clamp Combo Head
Mounting Options	None
Thread Size	6-32
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyamide
Centerline (Pitch)	9.53 mm[.375 in]
Dimensions	
Product Length	58.7 mm[2.311 in]
Wire Size	.3 – 3 mm²
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	200
Packaging Method	Package
Other	
Terminal Blocks & Strips Comment	Do not order screw and captive clamp in

combination with other top hardware.,

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 6 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



Other options available upon request, consult our Product Information Center.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Wave solder capable to 265°C	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Buchanan NC6

C For support call+1 800 522 6752

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 6 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



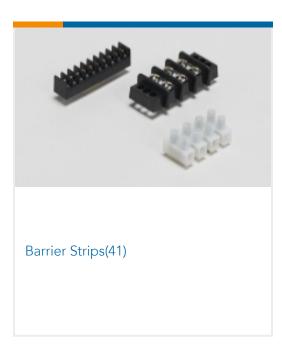

Customers Also Bought



06P UMNL PIN HDR ASSY 94VO	03P UMNL PIN HDR ASSY V2 NATL	02P UMNL PIN HDR ASSY POL NATL	08P UMNL PIN HDR ASSY POL 94VO
TE Part #641828-1 08P UMNL PIN HDR ASSY 94VO	TE Part #641967-1 04P UMNL PIN HDR ASSY POL NATL		

Documents

Product Drawings NC6-P108-06=NC6 ASSEMBLY

English

CAD Files

Customer View Model

ENG_CVM_CVM_3-1437664-8_M1.3d_stp.zip

English

Customer View Model

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 6 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



ENG_CVM_CVM_3-1437664-8_M1.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1437664-8_M1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS

English

1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE

English