


AMP | LEAVYSEAL

TE Internal #: 3-1534127-1 Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > LEAVYSEAL Housings

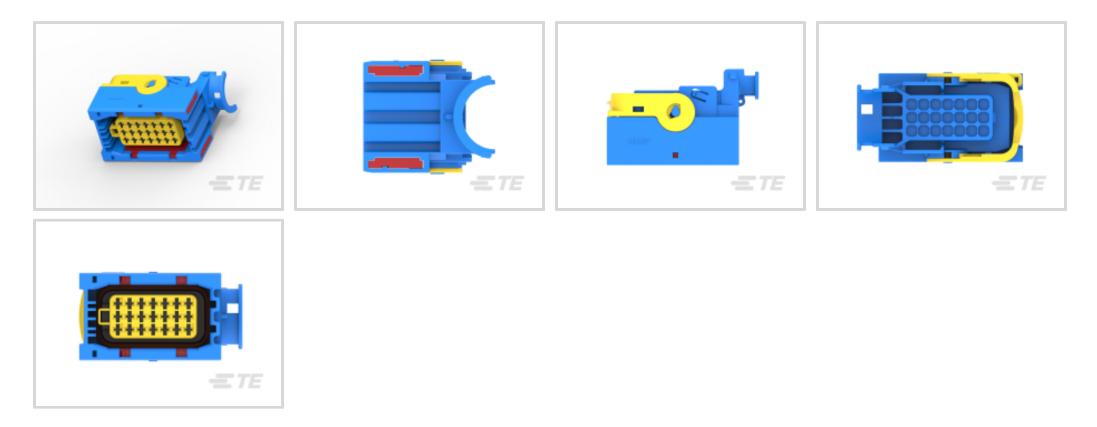

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 21

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: Yes

All LEAVYSEAL Housings (64)

E TE

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	21
Number of Rows	3
Electrical Characteristics	
Operating Voltage	28 VDC
Nominal Voltage Architecture	12 V, 24 V

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL



Body Features

Cable Exit Angle	90°		
Primary Product Color	Blue		
Connector & Keying Code	С		
Contact Features			
Contact Size	2.8mm		
Contact Type	Receptacle		
Mating Tab Width	2.8 mm[.11 in]		
Contact Current Rating (Max)	40 A		
Mechanical Attachment			
Terminal Position Assurance	Yes		
Strain Relief	With		
Mating Alignment Type	Keyed		
Mating Alignment	With		
Connector Mounting Type	Cable Mount (Free-Hanging)		
Housing Features			

Housing Material


PBT GF

Centerline (Pitch)	5 mm[.197 in]			
Dimensions				
Connector Height	37.9 mm[1.492 in]			
Product Width	43.7 mm[1.72 in]			
Product Length	69.2 mm[2.724 in]			
Row-to-Row Spacing	2.54 mm[.1 in]			
Usage Conditions				
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]			
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]			
Operation/Application				
Circuit Application	Signal			
Industry Standards				
Degree of Protection	IP67, IP6K9K			

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL



UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	160
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
•	
or compliance documentation, visit the product page on TE.com>	Compliant
	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 202
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023



other sources.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL








Also in the Series LEAVYSEAL



Automotive	Connector	Caps a	COVCIS	
(17)				

Accessories(15)



PCB Headers & Receptacles(16)

Customers Also Bought



Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL



ΞTE			
TE Part #1-1414687-0 V23136A0004X059-EV-CBOX	TE Part #1-1393302-6 VF741F11S01/X849	TE Part #4-1393306-6 VF711F11S01/X836	TE Part #1-2005141-2 C.E BOX ASSY FOR TBB(NEW2A)
TE Part #2005141-1 C.E BOX ASSY FOR TBB(NEW1)	TE Part #3-2005141-2 C.E BOX ASSY FOR TBB(NEW4B)		

Documents

Product Drawings AMP MCP 2.8 SOCKET HSG., 21POS. ASSY

English

CAD Files

Customer View Model ENG_CVM_CVM_3-1534127-1_F.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_3-1534127-1_F.3d_igs.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_3-1534127-1_F.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

German

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 21 Position, .197 in [5 mm] Centerline, Sealable, Blue, Signal, LEAVYSEAL



Product Environmental Compliance Product Compliance

English

Product Compliance

English