FC-325-1 - ACTIVE

CII | CII FC-325

TE Internal #: 3-1617806-7 Mid-Range Relays, 3 Form X, 3PST-NO-DM, 25 A, 115 VAC Coil Voltage, .55 A Coil Current, 115/200Vac (50-400Hz), Studs, 6-32 UNC-2A, CII FC-325

View on TE.com >

Relays, Contactors & Switches > Relays > Mil-Aero Relays > Mid-Range Relays



Mid-Range Relay Contact Arrangement: 3 Form X, 3PST-NO-DM

Coil Suppression Diode: Without

Auxiliary Contacts: Without

Mid-Range Relay Contact Current Rating: 25 A

Mid-Range Relay Coil Voltage Rating: 115 VAC

Features

Product Type Features

Enclosure Type Terminal Configuration Solder Hooks



Hermetically Sealed

| Product Type | Relay |
|---|------------------------------|
| Relay Туре | Military/Aerospace Mid-Range |
| Electrical Characteristics | |
| Vibration | 10G's, 5 – 1000Hz |
| Shock | 50G's, 11ms |
| Coil Suppression Diode | Without |
| Mid-Range Relay Coil Voltage Rating | 115 VAC |
| Coil Current | .55 A |
| Mid-Range Relay Contact Switching (Max) | 115/200Vac (50-400Hz) |
| Back EMF Suppression | Without |
| Coil Magnetic System | Non-Polarized, Monostable |
| Actuating System | AC |
| Signal Characteristics | |
| Frequency | 400 Hz |
| Contact Features | |
| | |

C For support call+1 800 522 6752

09/18/2023 09:33PM | Page 1

FC-325-1

Mid-Range Relays, 3 Form X, 3PST-NO-DM, 25 A, 115 VAC Coil Voltage, .55 A Coil Current, 115/200Vac (50-400Hz), Studs, 6-32 UNC-2A, CII FC-325



| Mid-Range Relay Contact Arrangement | 3 Form X, 3PST-NO-DM |
|---|--------------------------------|
| Auxiliary Contacts | Without |
| Mid-Range Relay Contact Current Rating | 25 A |
| Contact Base Material | Silver Cadmium Oxide |
| Mechanical Attachment | |
| Mid-Range Relay Mounting Type | Studs, 6-32 UNC-2A |
| Usage Conditions | |
| Operating Temperature Range | -70 – 125 °C |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| | |
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC | Not Compliant Not Compliant |
| | · |

Not Yet Reviewed

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

FC-325-1

Mid-Range Relays, 3 Form X, 3PST-NO-DM, 25 A, 115 VAC Coil Voltage, .55 A Coil Current, 115/200Vac (50-400Hz), Studs, 6-32 UNC-2A, CII FC-325






Also in the Series CII FC-325



Customers Also Bought

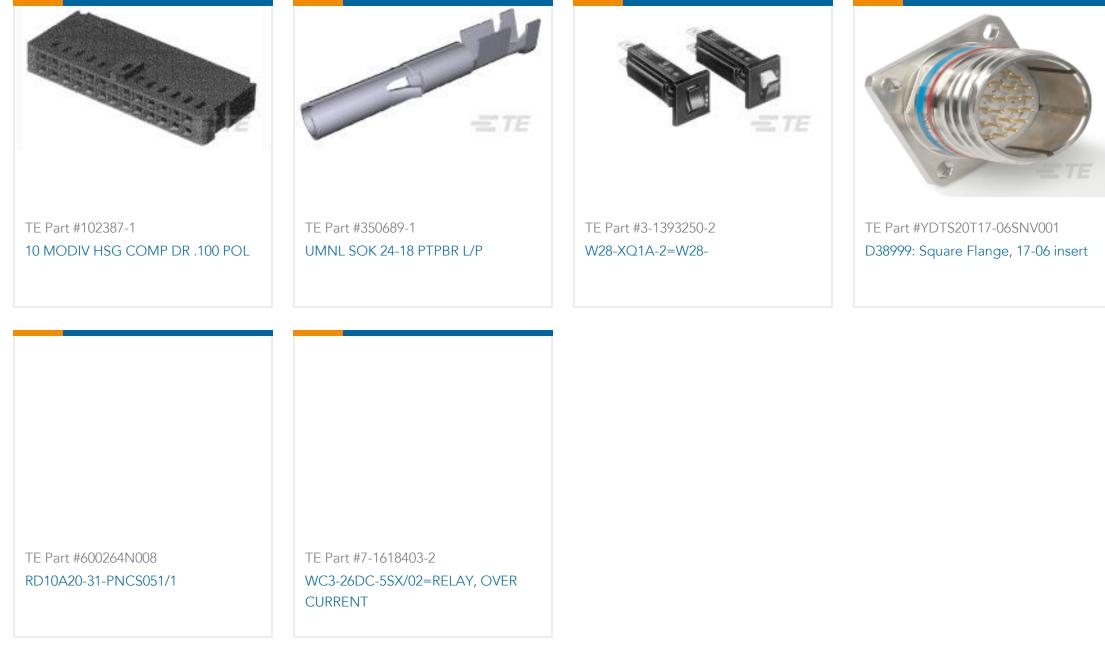







Documents

Product Drawings FC-325-1=MS27418-1A

English

CAD Files

FC-325-1

Mid-Range Relays, 3 Form X, 3PST-NO-DM, 25 A, 115 VAC Coil Voltage, .55 A Coil Current, 115/200Vac (50-400Hz), Studs, 6-32 UNC-2A, CII FC-325



3D PDF

3D

Customer View Model ENG_CVM_CVM_3-1617806-7_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1617806-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1617806-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages CII FC-325 Series Relay

English