

SOLISTRAND

TE Internal #: 321895 Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: #8, M4

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal		
Stud Size	#8, M4		
Sealable	No		
Wire Insulation Support Retention Type	Non-Insulation Support		

1

connectivity

Configuration Features

Number	of	Но	les
I NOTTING CI			00

Body Features

Product Weight	.648 g		
Contact Features			
Barrel Type	Closed		
Terminal Orientation	Straight		
Terminal Plating Material	Unplated		
Mechanical Attachment			
Wire Insulation Support	Without		
Dimensions			
Wire Size	509 – 3260 CMA		
Stud Diameter	4.34 mm[.171 in]		
Tongue Thickness	.79 mm[.031 in]		
Product Length	15.77 mm[.621 in]		

C For support call+1 800 522 6752

321895

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated



Barrel Inside Diameter	1.55 mm[.061 in]			
Usage Conditions				
Insulation Option	Uninsulated			
Operating Temperature Range	649 °C[1200 °F]			
Industry Standards				
Government Qualified Terminal	No			
Packaging Features				
Packaging Quantity	1000			
Packaging Method	Loose Piece			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE			

2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


321895

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated





Customers Also Bought

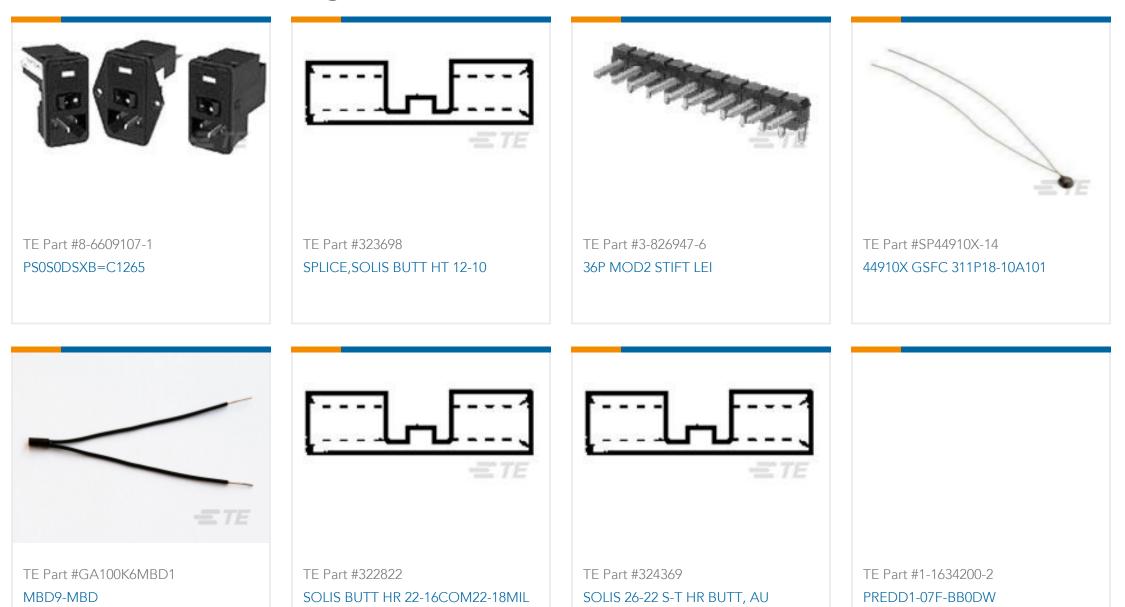

	E Part #GA100K6MCD475 1BD9-PROBE						
D	Documents						
Pı	oduct Drawings						

SOLIS R HT 22-16COMM22-18MIL 8

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_321895_AA.2d_dxf.zip

321895

Closed Ring Tongue Terminal, 22 – 16 AWG, #8 / M4 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated



English

Customer View Model ENG_CVM_CVM_321895_AA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_321895_AA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages STRATO-THERM Terminals & Splices for High Temperature Applications

English

Product Specifications Application Specification

English