


### SOLISTRAND

TE Internal #: 322329 Closed Ring Tongue Terminal, 16 – 14 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated

#### View on TE.com >

Terminals & Splices > Ring Terminals

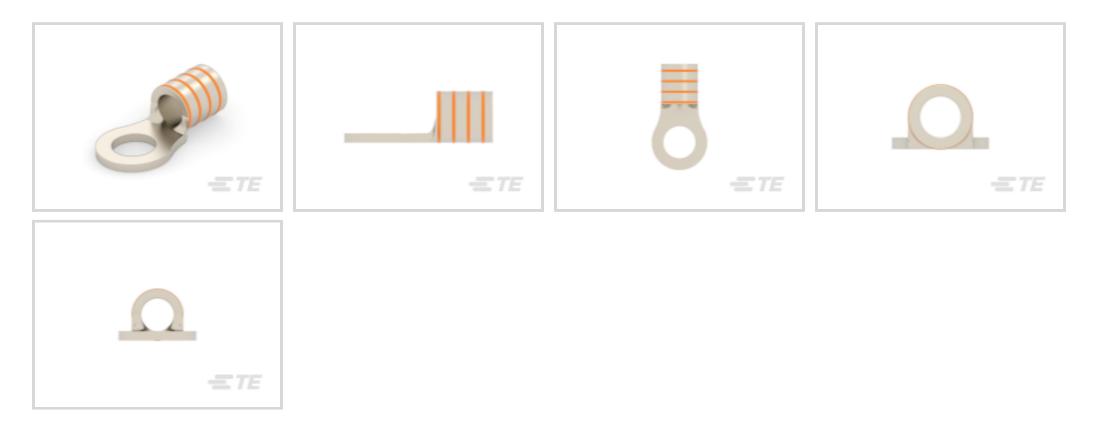

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: #6, M3.5

## Features

#### **Product Type Features**

Ring Terminal Product Type	Closed Ring Tongue Terminal				
Stud Size	#6, M3.5				
Sealable	No				
Wire Insulation Support Retention Type	Insulation Support				
Configuration Features					
Number of Holes	2				
Body Features					
Product Weight	.561 g				
Contact Features					
Barrel Type	Closed				
Terminal Orientation	Straight				
Terminal Plating Material	Unplated				
Mechanical Attachment					
Wire Insulation Support	Without				
Dimensions					



#### 322329

Closed Ring Tongue Terminal, 16 – 14 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated



Wire Size	2050 – 5180 CMA			
Stud Diameter	3.68 mm[.145 in]			
Tongue Thickness	.79 mm[.031 in]			
Product Length	12.19 mm[.48 in]			
Barrel Inside Diameter	2.16 mm[.085 in]			
Usage Conditions				
Insulation Option	Uninsulated			
Operating Temperature Range	649 °C[1200 °F]			
Industry Standards				
Government Qualified Terminal	No			
Packaging Features				
Packaging Quantity	1000			
Packaging Method	Loose Piece			
Product Compliance				
For compliance documentation, visit the product page on TE.com>				

EU RoHS Directive 2	2011/65/EU
---------------------	------------

#### Compliant

EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC		
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free		
Solder Process Capability	Not applicable for solder process capability		

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

#### 322329

Closed Ring Tongue Terminal, 16 – 14 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



# Customers Also Bought

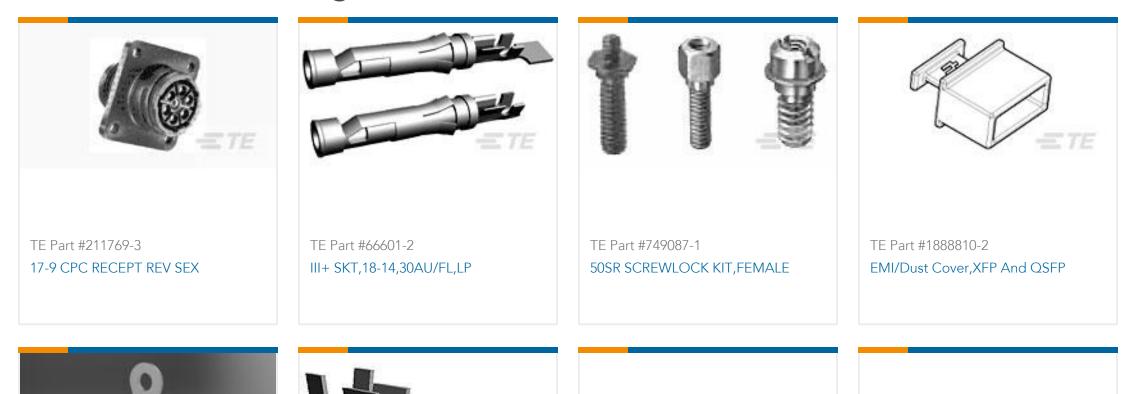

ETE			
TE Part #320553 PIDG R 22-16 COMM 22-18 MIL 4	TE Part #62572-6 FF 110 REC 20-16AWG TPBR	TE Part #2231144-6 038-004-415, CAT6, SHIELDED, 26 AWG, 8M	TE Part #2231145-6 038-004-416, CAT6, SHIELDED, 26 AWG, 8M
TE Part #2220931-2 038-004-402, POWER CORD TO MNL, BLK	TE Part #2220932-2 038-004-403, POWER CORD TO MNL, GRAY		

# Documents

Product Drawings TERMINAL, SOLIS R HT 16-14 6

English

### 322329

Closed Ring Tongue Terminal, 16 – 14 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Unplated, Uninsulated



#### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_322329\_S.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_322329\_S.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_322329\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages STRATO-THERM Terminals & Splices for High Temperature Applications

English

Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

#### Product Compliance

English