

SOLISTRAND

TE Internal #: 323683 Closed Ring Tongue Terminal, 12 – 10 AWG, M6 / 1/4 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: 1/4, M6

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	1/4, M6
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Product Weight	2.564 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Nickel
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	



323683

Closed Ring Tongue Terminal, 12 – 10 AWG, M6 / 1/4 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated



Wire Size	5180 – 13100 CMA
Stud Diameter	6.73 mm[.265 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	25.5 mm[1.004 in]
Barrel Inside Diameter	3.28 mm[.129 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	649 °C[1200 °F]
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece
Product Compliance	
For compliance documentation, visit the product page on TE.com>	

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

323683

Closed Ring Tongue Terminal, 12 – 10 AWG, M6 / 1/4 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought

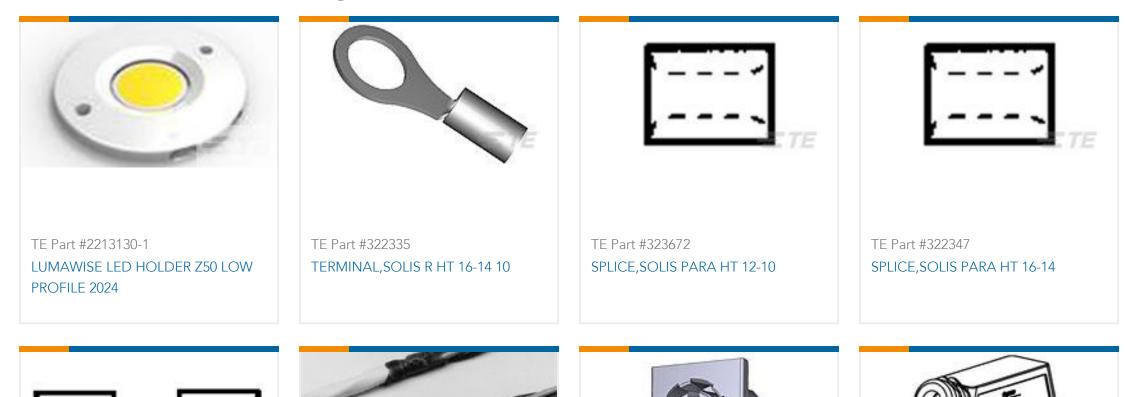



Documents

Product Drawings

TERMINAL, SOLIS R HT 12-10 1/4

English

CAD Files

Customer View Model

ENG_CVM_CVM_323683_P.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_323683_P.3d_igs.zip

323683

Closed Ring Tongue Terminal, 12 – 10 AWG, M6 / 1/4 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated



English

Customer View Model ENG_CVM_CVM_323683_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages STRATO-THERM Terminals & Splices for High Temperature Applications

English

Product Environmental Compliance TE Material Declaration

English