


## SOLISTRAND

TE Internal #: 33456 Closed Ring Tongue Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated

### View on TE.com >

Terminals & Splices > Ring Terminals

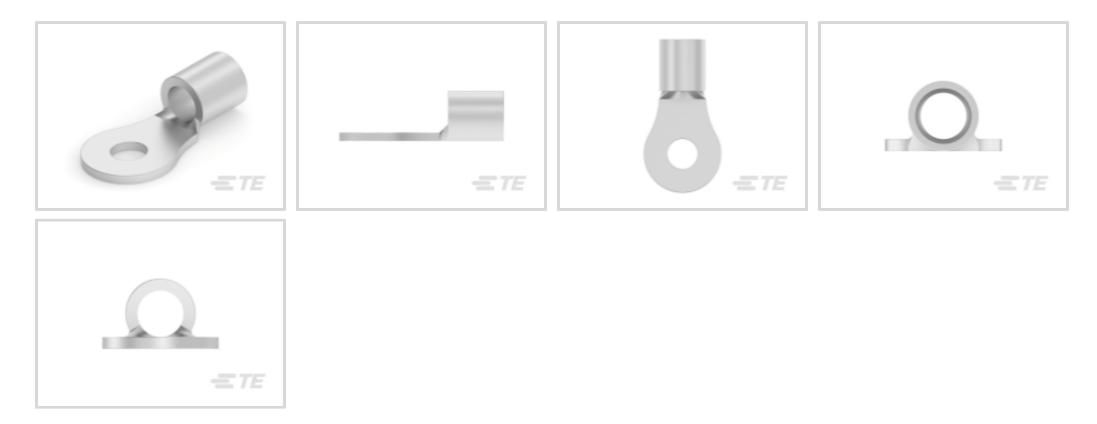

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: #6, M3.5

## Features

## **Product Type Features**

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Holes	1
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	5180 – 13100 CMA
Stud Diameter	3.68 mm[.145 in]



## 33456

Closed Ring Tongue Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



Tongue Thickness	.99 mm[.039 in]
Product Length	19.43 mm[.765 in]
Barrel Inside Diameter	3.28 mm[.129 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Base Material Compatible With Wire Plating Material	Copper Tin
Compatible With Wire Plating Material	
Compatible With Wire Plating Material Industry Standards	Tin
Compatible With Wire Plating Material Industry Standards Government Qualified Terminal	Tin

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Colder Process Consolities	Not applicable for colder process capability

#### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits as defined in the Annexes of Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

Closed Ring Tongue Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**

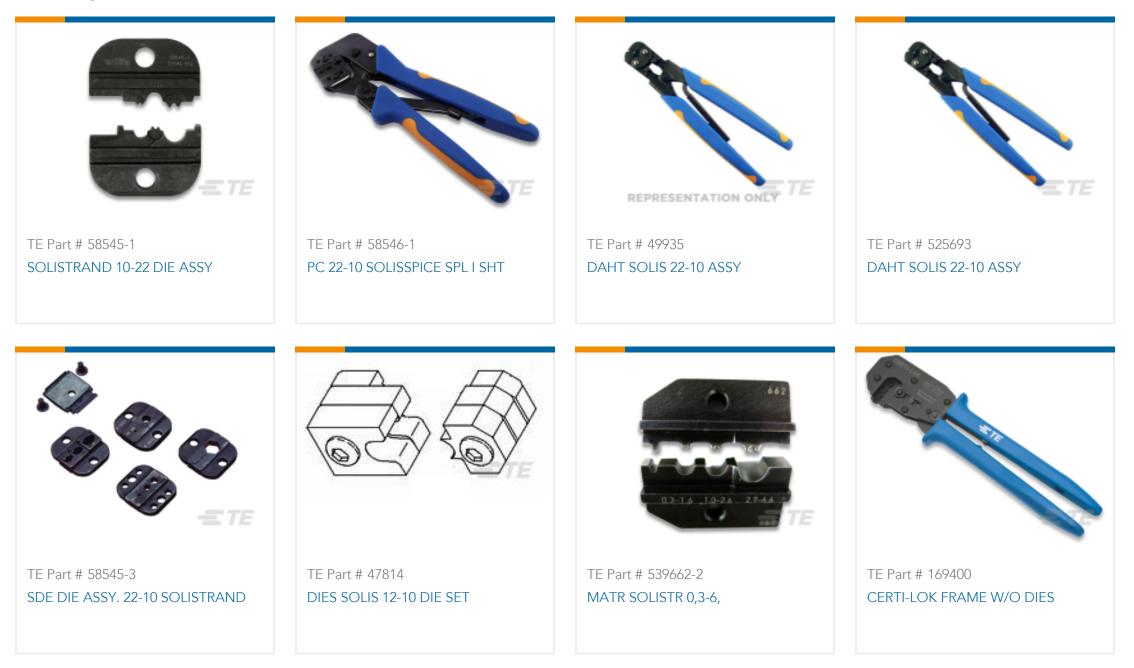

# Customers Also Bought





# Documents

Product Drawings TERMINAL,SOLIS R 12-10 6

English

### 33456

Closed Ring Tongue Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



CAD Files Customer View Model ENG\_CVM\_CVM\_33456\_AE.2d\_dxf.zip English 3D PDF 3D Customer View Model ENG\_CVM\_CVM\_33456\_AE.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_33456\_AE.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance Product Compliance Document

English

Product Compliance Document

English

Agency Approvals

UL Report

English

**UL Report** 

English

UL Report

English