


### SIAMEZE

TE Internal #: 4-1601140-2 Magnet Wire Terminals, Wire-to-Wire, Lead Wire Size 22 – 18 AWG, Lead Wire Size .32 – .82 mm², Insulation Displacement (IDC), Nickel Plating, SIAMEZE

#### View on TE.com >

Terminals & Splices > Magnet Wire Terminals

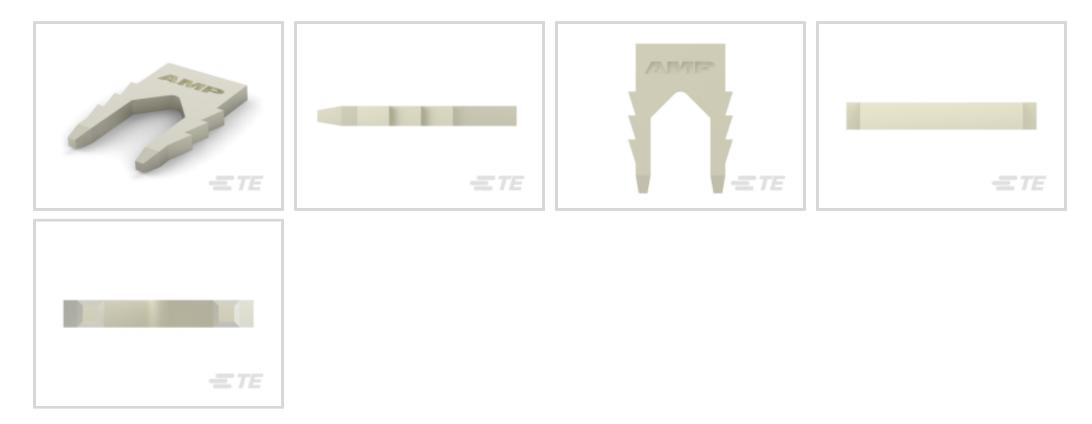

Magnet Wire Terminal Type: Wire-to-Wire

Lead Wire Size: .32 – .82 mm<sup>2</sup>

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Stock Thickness (Magnet Wire Side): .64 mm [.025 in ]

### Features

#### durat T. Cost



Product Type Features	
Compatible With Discrete Wire Type	Solid, Stranded
Contact Features	
Magnet Wire Terminal Type	Wire-to-Wire
Terminal Plating Material	Nickel
Terminal Orientation	Straight
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Dimensions	
Terminal Height	6.35 mm[.25 in]
Lead Wire Size	.32 – .82 mm²
Stock Thickness (Magnet Wire Side)	.64 mm[.025 in]
Product Length	6.35 mm[.25 in]
Usage Conditions	
Insulation Option	Uninsulated

### 4-1601140-2

Magnet Wire Terminals, Wire-to-Wire, Lead Wire Size 22 – 18 AWG, Lead Wire Size . 32 – .82 mm², Insulation Displacement (IDC), Nickel Plating, SIAMEZE



### **Operation/Application**

Compatible With Wire Base Material

### Packaging Features

Packaging Method

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Copper

Loose Piece

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**




### 4-1601140-2

Magnet Wire Terminals, Wire-to-Wire, Lead Wire Size 22 – 18 AWG, Lead Wire Size . 32 – .82 mm², Insulation Displacement (IDC), Nickel Plating, SIAMEZE



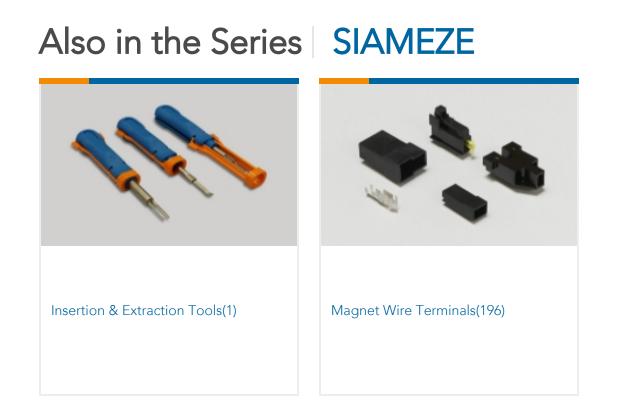

# Customers Also Bought

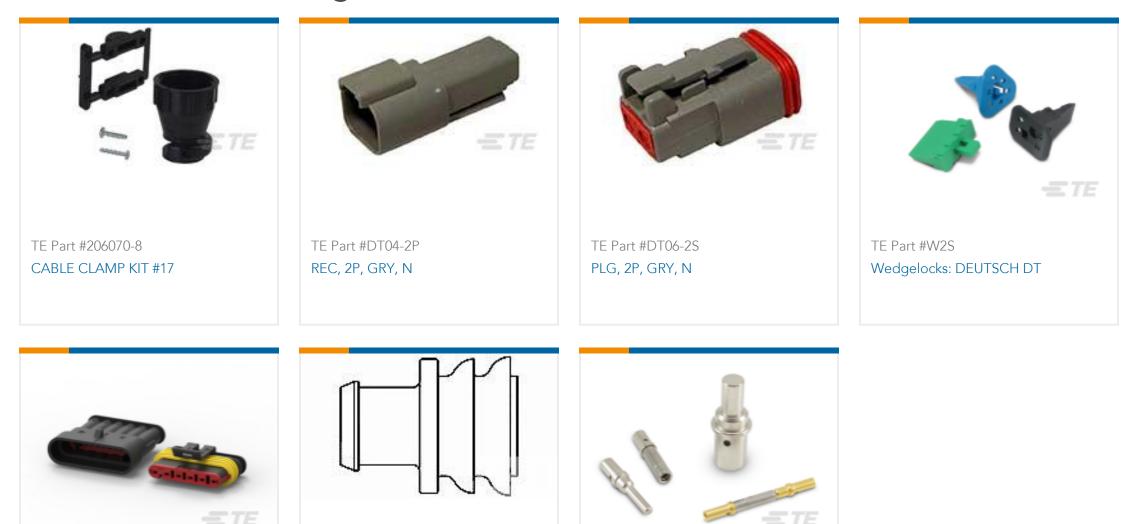



# Documents

# Product Drawings

LEADLOK STRAIN RELIEF, SMZ

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_4-1601140-2\_F.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-1601140-2\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1601140-2\_F.3d\_stp.zip

### 4-1601140-2

Magnet Wire Terminals, Wire-to-Wire, Lead Wire Size 22 – 18 AWG, Lead Wire Size . 32 – .82 mm², Insulation Displacement (IDC), Nickel Plating, SIAMEZE



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Magnet Wire Terminals & Splices

English

**Product Specifications** Application Specification

English

Product Environmental Compliance Product Compliance English

**Product Compliance** 

English