


ATX Power

TE Internal #: 4-1775099-0 PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 1.4 mm [. 055 in] Centerline, Tin, Through Hole - Solder, Power, Ivory, ATX Power

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

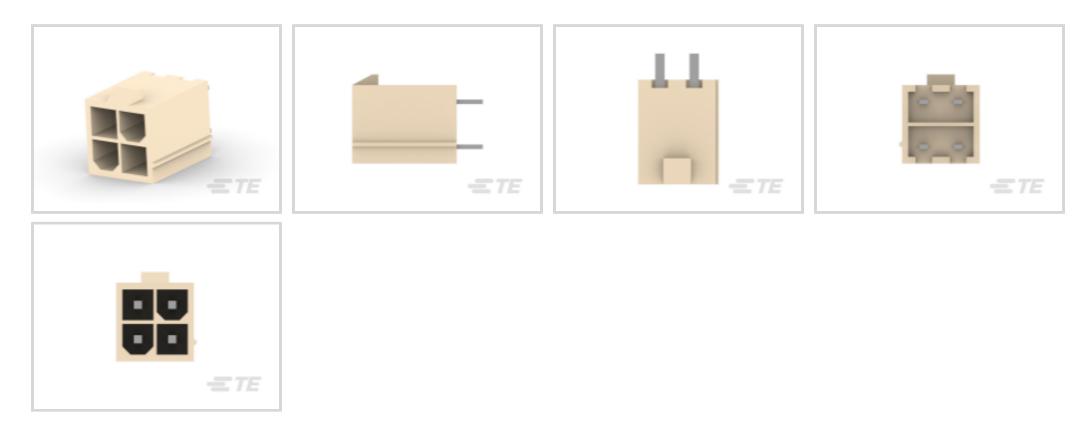

Connector System: Wire-to-Board

Number of Positions: 4

Number of Rows: 2

Centerline (Pitch): 1.4 mm [.055 in]

PCB Mount Orientation: Vertical

Features

E T E connectivity

Product Type Features

| Connector System | Wire-to-Board | | |
|-----------------------------------|-----------------------|--|--|
| Sealable | No | | |
| Connector & Contact Terminates To | Printed Circuit Board | | |
| PCB Connector Assembly Type | PCB Mount Header | | |
| Configuration Features | | | |
| Number of Positions | 4 | | |
| Number of Rows | 2 | | |
| PCB Mount Orientation | Vertical | | |
| Electrical Characteristics | | | |
| Operating Voltage | 250 VAC | | |
| Body Features | | | |
| Primary Product Color | lvory | | |
| Contact Features | | | |

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 1.4 mm [.055 in] Centerline, Tin, Through Hole - Solder, Power, Ivory, ATX Power



| PCB Contact Termination Area Plating Material Thickness | 3.05 μm[120.07 μin] |
|---|---------------------|
| Contact Layout | Matrix |
| Mating Tab Width | 1.14 mm[.044 in] |
| Mating Tab Thickness | 1.1 mm[.043 in] |
| Contact Underplating Material Thickness | 1.27 μm[50 μin] |
| Contact Mating Area Plating Material Thickness | 3.05 μm[120.07 μin] |
| PCB Contact Termination Area Plating Material Finish | Matte |
| Contact Mating Area Plating Material Finish | Matte |
| Contact Underplating Material | Nickel |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material | Tin |
| Contact Type | Pin |
| Contact Current Rating (Max) | 9 A |
| Termination Features | |

| Rectangular Termination Post & Tail Thickness | .55 mm[.021 in] |
|---|-----------------------|
| Rectangular Termination Post & Tail Width | 1.14 mm[.044 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| Mating Alignment Turge | Delerization |
|-----------------------------|---------------------------|
| Mating Alignment Type | Polarization |
| Mating Retention | Without |
| Connector Mounting Type | Board Mount |
| Mating Alignment | With |
| PCB Mount Alignment | Without |
| PCB Mount Retention | With |
| Housing Features | |
| Housing Material | PA 9T |
| Centerline (Pitch) | 1.4 mm[.055 in] |
| Dimensions | |
| Row-to-Row Spacing | 4.2 mm[.165 in] |
| Usage Conditions | |
| Operating Temperature Range | -25 – 85 °C[-13 – 185 °F] |
| Operation/Application | |
| | |
| | 09/27/2023 10.4 |

C For support call+1 800 522 6752

09/27/2023 10:45AM | Page 2

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 1.4 mm [.055 in] Centerline, Tin, Through Hole - Solder, Power, Ivory, ATX Power



| Circuit Application | Power |
|---|--|
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |
| Packaging Type | Tray |
| Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 1.4 mm [.055 in] Centerline, Tin, Through Hole - Solder, Power, Ivory, ATX Power



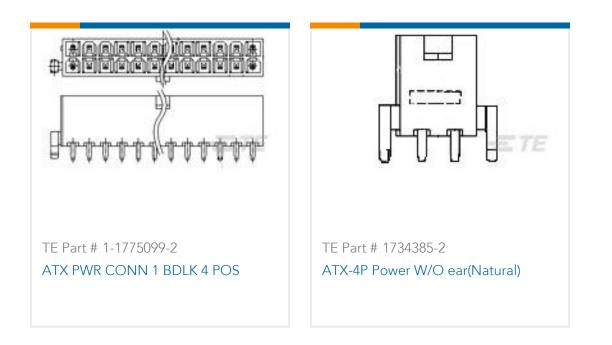

Also in the Series ATX Power



Customers Also Bought



| TE Part #2132415-5 EP2.5 Shrouded HDR ASSY 5P VERT w /o boss | TE Part #1367147-3 SFP COVER, UNPL, NO LOGO | TE Part #2132415-6 EP2.5 Shrouded HDR ASSY 6P VERT w /o boss | TE Part #2327672-1 RECEPT ASSY, RA, 56 POS, SLIVER 2.0 |
|--|--|--|---|
| | | | |
| TE Part #84982-5 1MM FFC SMT V ASSY 5P EMBOSS | TE Part #4-2176341-9 CRGCQ 0805 100K 1% | TE Part #1-2319847-6 END STACK DIP 6P J RAISED TUBE | TE Part #6-1879216-0 CPF 0402 221K 0.1% 25PPM 1K RL |
| | | | |

| TE Part #2368060-7 | TE Part #2368060-8 | |
|----------------------------|----------------------------|--|
| DDR4 DIMM 288 Pin SMT type | DDR4 DIMM 288 Pin SMT type | |
| | | |

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 1.4 mm [.055 in] Centerline, Tin, Through Hole - Solder, Power, Ivory, ATX Power



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-1775099-0_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-1775099-0_E.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_4-1775099-0_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Product Specification

English