
RLP73K3AR51JTE <

CGS | CGS RLP73 TE Internal #: 4-2176058-2 .51 Ω, Thick Film, Current Sensing Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 2 W, ±200 ppm/°C, Solder, 6.35 x 3.15 x .74 mm, CGS RLP73

View on TE.com >

Passive Components > Resistors > Surface Mount Resistors > Thick Film Resistor: Current Sense

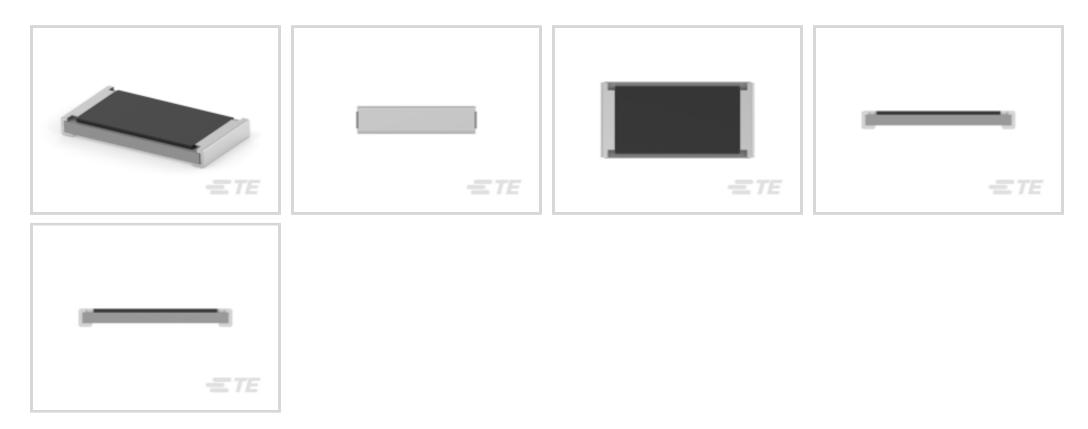

Resistor Type: Current Sensing Resistor

Number of Terminations: 2

Package Size Code: 2512

Packaging Method: Taped & Reeled

Passive Component Tolerance: 5%

All Thick Film Resistor: Current Sense (112)



Features

Product Type Features

Product Type	Fixed Resistor		
Resistor Type	Current Sensing Resistor		
Package Size Code	2512		
Element Type	Thick Film		
Configuration Features			
Number of Resistors	1		
Electrical Characteristics			
Passive Component Tolerance	5 %		
Resistance Class	Up to 1kΩ		
Resistance Value	.51 Ω		
Power Rating	2 W		
Termination Features			

C For support call+1 800 522 6752

RLP73K3AR51JTE

.51 Ω, Thick Film, Current Sensing Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 2 W, ±200 ppm/°C, Solder, 6.35 x 3.15 x .74 mm, CGS RLP73



Number of Terminations	2
Surface Mount Resistor Termination Type	Solder
Dimensions	
Passive Component Dimensions	6.35 x 3.15 x .74 mm
Usage Conditions	
Temperature Coefficient	±200 ppm/°C
Packaging Features	
Packaging Method	Taped & Reeled
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 260°C

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


RLP73K3AR51JTE

.51 Ω, Thick Film, Current Sensing Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 2 W, ±200 ppm/°C, Solder, 6.35 x 3.15 x .74 mm, CGS RLP73






Also in the Series CGS RLP73

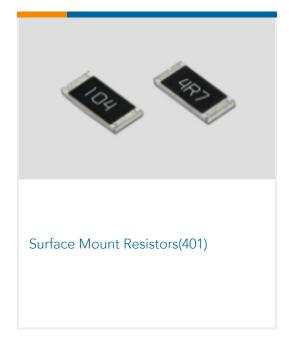


Customers Also Bought

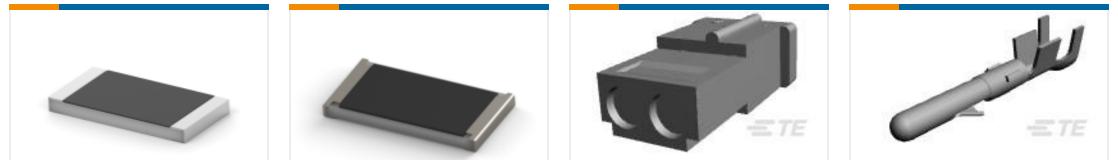

=TE	= TE			
TE Part #5-1622820-5 SMD Power Resistor: 1 Watt, 3520 Series	TE Part #1-2176070-4 SMD Power Resistor: 2 Watt, 3521 Series	TE Part #1-480318-0 02P CMNL PLUG HSG F/H NATL	TE Part #60618-1 CMNL PIN PTPBR L/P	



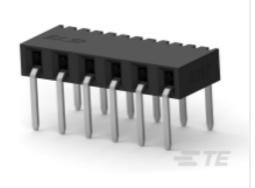



TE Part #2307725-2 2P,2MM,B-B,REC,SRHZ,SMD,0.1AU

TE Part #2314936-6 6P,2MM,B-B,REC,SRHZ,2.8,0.1AU,TR TE Part #2314928-2 2P,2MM,BB,REC,SRHZ,2.1,0.1AU,TUBE

Documents

Product Drawings

RLP73K 3A R51 5% 2K RL

English

CAD Files

3D PDF

3D

RLP73K3AR51JTE

.51 Ω, Thick Film, Current Sensing Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 2 W, ±200 ppm/°C, Solder, 6.35 x 3.15 x .74 mm, CGS RLP73



Customer View Model

ENG_CVM_CVM_4-2176058-2_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-2176058-2_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-2176058-2_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SMD Low Ohmic Current Sense Resistors - Type RL73 Series

English