




Terminals & Splices > Quick Disconnects

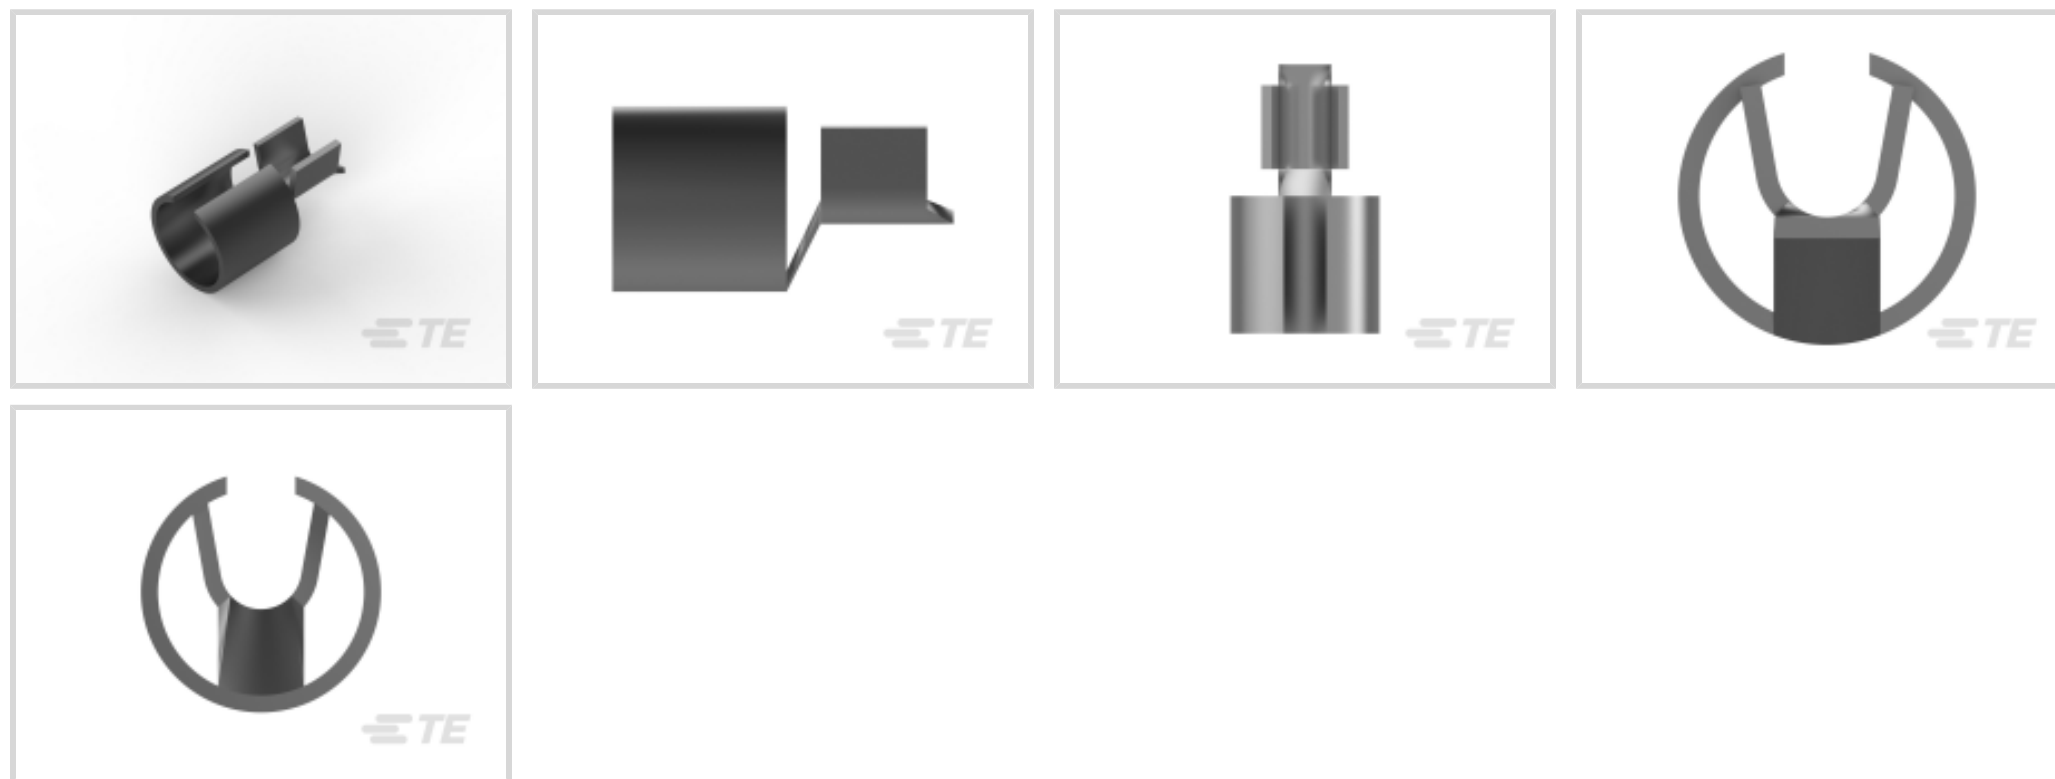

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1.31 – 2.08 mm<sup>2</sup>**

Terminal Orientation: **Straight**

Contact Base Material: **Brass**

### Features

#### Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

#### Contact Features

Quick Disconnect Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

#### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

#### Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

#### Dimensions

Terminal Material Thickness	.51 mm[.02 in]
-----------------------------	----------------



Product Length	17.65 mm[.695 in]
----------------	-------------------

Wire Size	1.31 – 2.08 mm <sup>2</sup>
-----------	-----------------------------

### Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
-----------------------------	----------------------------

### Industry Standards

Agency/Standard	UL
-----------------	----

### Packaging Features

Packaging Quantity	10000
--------------------	-------

Packaging Method	Strip/Reel
------------------	------------

### Other

Terminals & Splices Comment	For automotive fuse.
-----------------------------	----------------------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1438246-1  
SPLICE, BUTT, HEATER WIRE 18-16 AWG BR



TE Part # 61248-1  
TAB INSULATION PIERCING 20-18 AWG TPCUBR



TE Part # 1438246-2  
SPLICE, BUTT, HEATER WIRE 18-16AWG PTPBR



TE Part # 63271-1  
COIL TERMINAL TERMINAL 24-20 AWG PTPBR



TE Part # 962907-2  
FLACHSTECK 4,8 SPEZ



TE Part # 1217440-8  
STRAIN RELIEF, SPECIAL PH BRZ



TE Part # 1217881-1  
250 FUSE RCPT 020PTPBR



TE Part # 2-2150671-1  
OC-PA-E-FM-140F-001-0188



TE Part # 2-2150671-2  
OC-PA-E-FA-140F-001-0188



TE Part # 2150671-1  
OC-AT-E-FM-140F-001-0188



TE Part # 2150671-2  
OC-AT-E-FA-140F-001-0188



TE Part # 61280-1  
BUTTON CONTACT 20-16 AWG BR



TE Part # 61684-3  
SPECIAL TAB TAB TNSL WIRE GPBR



TE Part # 61684-5  
SPECIAL TAB TAB TNSL WIRE NTPBR




TE Part # 63723-2  
RCPT TWISTLOK 20-16 0255 TPPHBZ



**KIT**  
REPRESENTATION ONLY  
TE Part # 7-2150671-7  
OC-140F-CRIMP TOOLING KIT

## Customers Also Bought

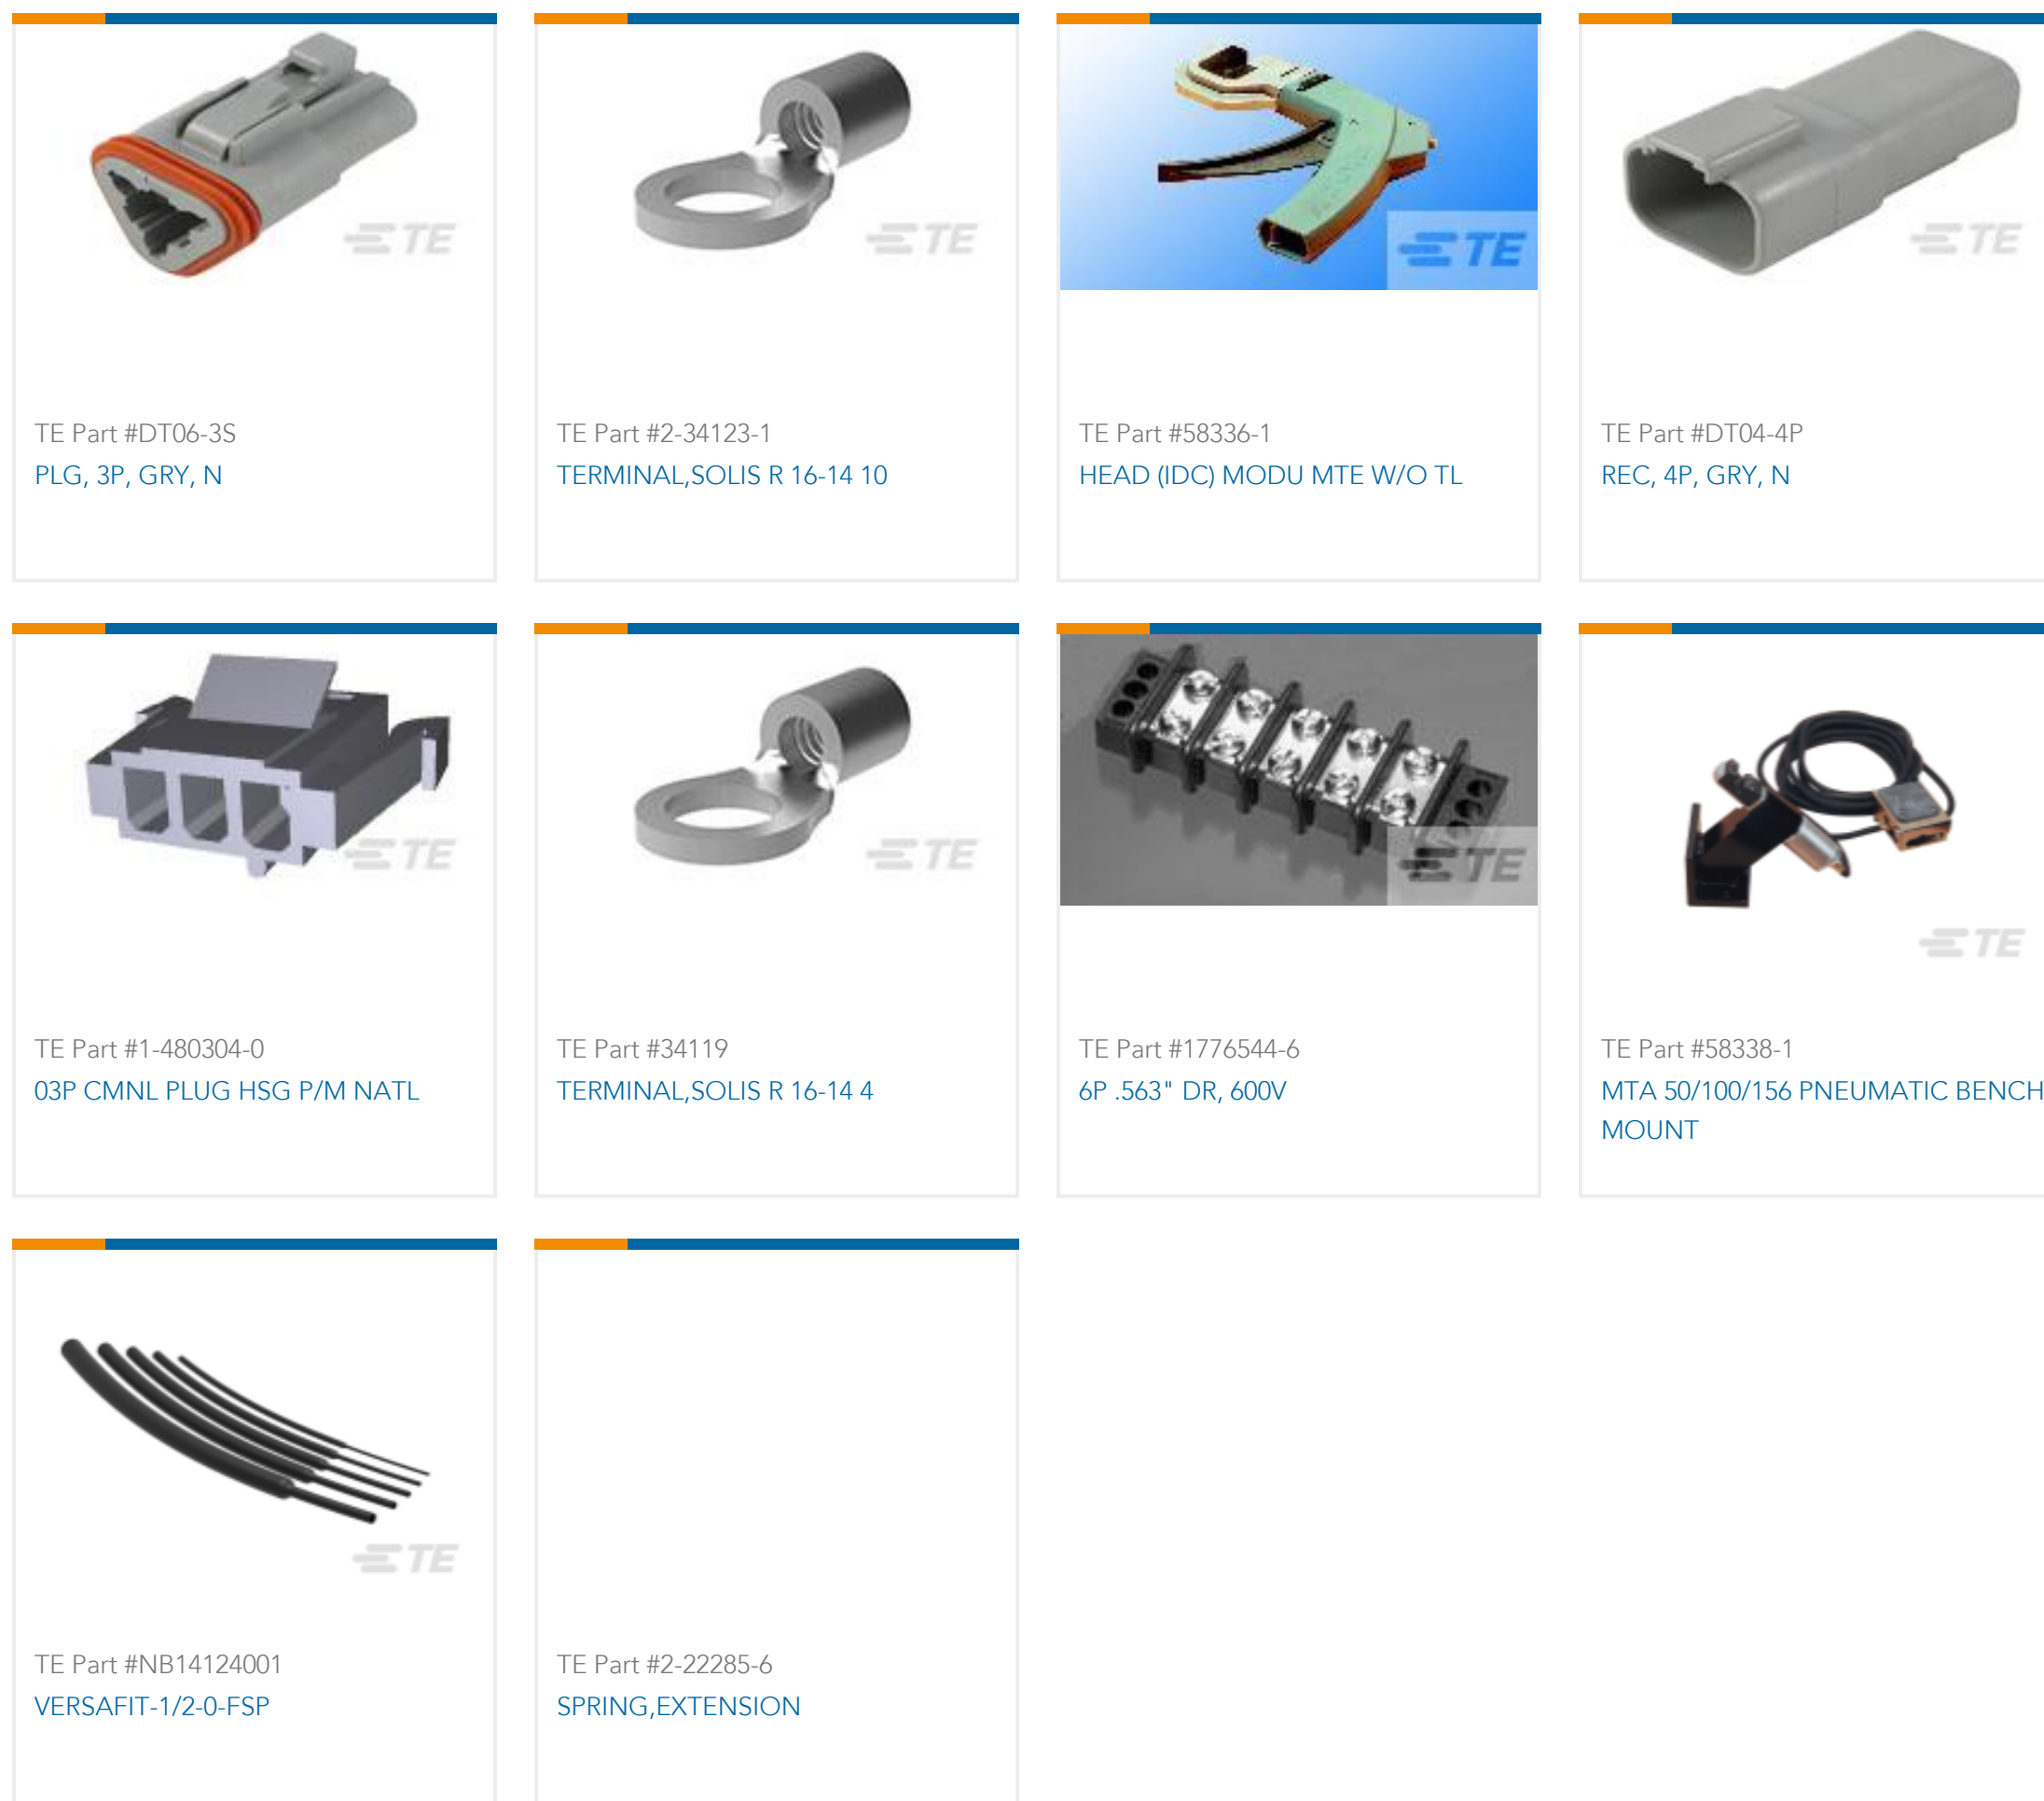

## Documents

### Product Drawings

[FUSE TERMINAL RECEPTACLE 16-14 AWG TPBR](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_40626\\_AG\\_c-40626-ag.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_40626\\_AG\\_c-40626-ag.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_40626\\_AG\\_c-40626-ag.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Environmental Compliance

40626

Quick Disconnects, Receptacle, 16 – 14 AWG Wire Size, 1.31 – 2.08 mm<sup>2</sup> Wire Size,  
Straight, Brass, Pre-Tin Plating, Strip/Reel, F-Crimp, Open



**Product Compliance**

English

**Product Compliance**

English