


TE Internal #: 41582 Closed Ring Tongue Terminal, 24 – 20 AWG, #10 Stud Size, 5 mm [. 197 in] Stud Diameter, Open Barrel, Straight, Tin, Uninsulated View on TE.com >



Terminals & Splices > Ring Terminals

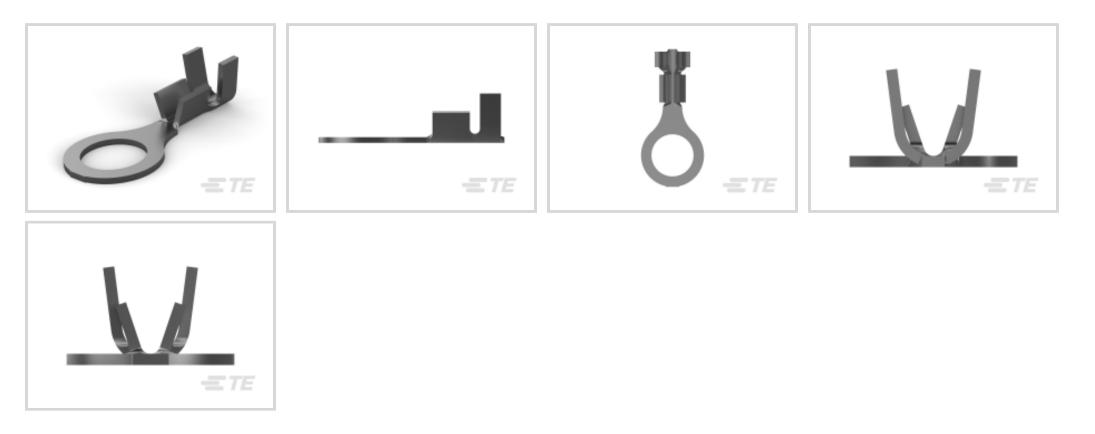

Ring Terminal Product Type: Closed Ring Tongue Terminal Wire Size: 404 – 1021 CMA

Stud Size: **#10**

Features

Product Type Features

Shape Description

Ring Terminal Product Type

Circular/Oval

Closed Ring Tongue Terminal

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#10
Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Product Weight	.42 g
Contact Features	
Contact Base Material	Brass
Barrel Type	Open
Terminal Orientation	Straight
Terminal Plating Material	Tin
Contact Underplating Material	None

41582

Closed Ring Tongue Terminal, 24 – 20 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Open Barrel, Straight, Tin, Uninsulated



Mechanical Attachment

Dimensions	
	.079 in
Wire Size	404 – 1021 CMA
Stud Diameter	5 mm[.197 in]
Tongue Thickness	.51 mm[.02 in]
Product Length	16 mm[.63 in]
Barrel Inside Diameter	.89 mm, 2.54 mm[.035 in][.1 in]
Compatible Insulation Diameter (Max)	2.49 mm[.098 in]
Compatible Insulation Diameter Range	2 – 2.5 mm[.079 – .098 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	15000
Packaging Method	Strip/Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PV

41582

Closed Ring Tongue Terminal, 24 – 20 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Open Barrel, Straight, Tin, Uninsulated



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 2150283-1 OCEAN_2.0_Applicator-S-080F130F



TE Part # 2150283-2 OCEAN_2.0_Applicator-S-080F130F



TE Part # 7-2150283-1 OCEAN_2.0_Applicator-S-080F130F



TE Part # 7-2150283-2 OCEAN_2.0_Applicator-S-080F130F



Customers Also Bought



41582

Closed Ring Tongue Terminal, 24 – 20 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Open Barrel, Straight, Tin, Uninsulated







Documents

Product Drawings RING 190(4.82 MM) 24-20 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_41582_AA_c-41582-aa.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_41582_AA_c-41582-aa.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_41582_AA_c-41582-aa.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English