


### FASTON | FASTON 205

TE Internal #: 42781-2 Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width 5.21 mm [.205 in], Straight, Brass, FASTON 205

#### View on TE.com >

Terminals & Splices > Quick Disconnects

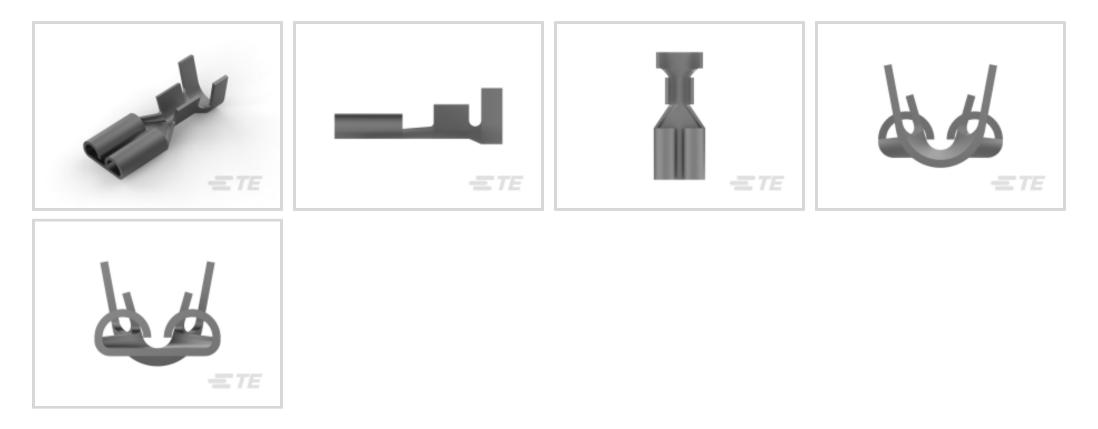

Quick Disconnect Terminal Type: Receptacle

Wire Size: .82 – 2.08 mm<sup>2</sup>

Mating Tab Width: 5.21 mm [.205 in ]

Mating Tab Thickness: .51 mm [.02 in ]

## Features

## Product Type Features



Insertion Force	Normal
Configuration Features	
Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire
Contact Features	
Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	5.21 mm[.205 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open
Termination Features	

## 42781-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 5.21 mm [.205 in], Straight, Brass, FASTON 205



Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Mating Retention Type	Dimple
Dimensions	
Terminal Material Thickness	.41 mm[.016 in]
Product Length	15.62 mm[.615 in]
Compatible Insulation Diameter Range	3.3 – 4.57 mm[.13 – .179 in]
Wire Size	.82 – 2.08 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
Industry Standards	
Agency/Standard	CSA, UL
Packaging Features	
Packaging Quantity	16000
Packaging Method	Strip/Reel

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer	

## 42781-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width 5.21 mm [.205 in], Straight, Brass, FASTON 205



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




TE Part # 42197-2 205 FASTON REC 22-18 AWG TPBR



TE Part # 2150084-1 OCEAN\_2.0\_APPLICATOR-E-100F180F



TE Part # 2150084-2 OCEAN\_2.0\_APPLICATOR-E-100F180F



TE Part # 7-2150084-7 OCEAN\_2.0\_SPARE\_PART\_KIT-100F180F





## Also in the Series | FASTON 205




# Customers Also Bought

## 42781-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width 5.21 mm [.205 in], Straight, Brass, FASTON 205



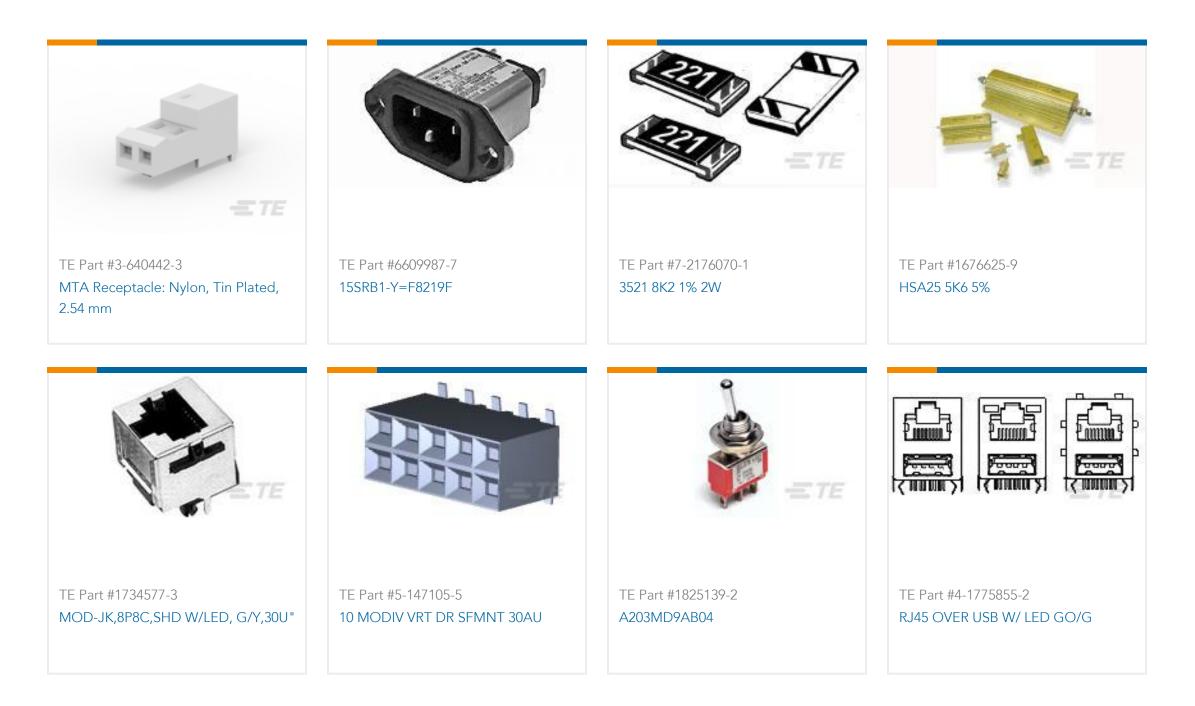

## Documents

**Product Drawings** 205 FASTON REC 18-14 AWG TPBR

English

**CAD** Files **Customer View Model** ENG\_CVM\_CVM\_42781-2\_S.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_42781-2\_S.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_42781-2\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

### Datasheets & Catalog Pages

#### 82004 FASTON Terminals (Insulated and Uninsulated) Catalog - FASTON Receptacles Section

English

**Product Specifications Application Specification** 

English