# 440129-5 - ACTIVE


### HPI

TE Internal #: 440129-5 Housing, Receptacle, Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal, HPI

#### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

AMP HPI 2.0 mm Receptacle Housings

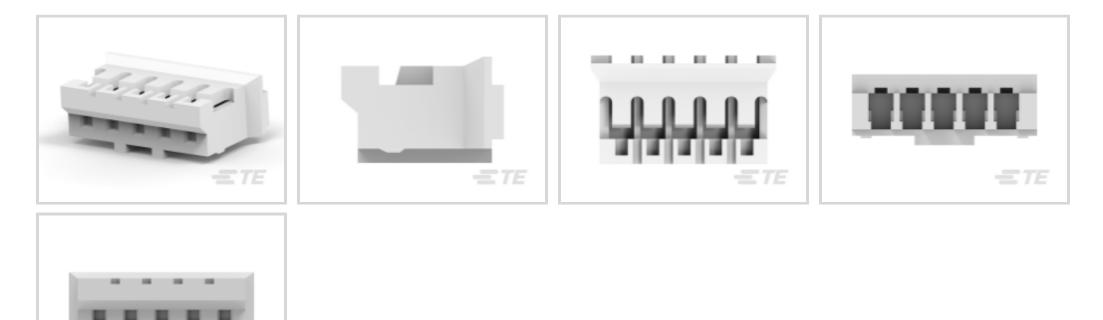

Connector Product Type: Housing Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 5

Centerline (Pitch): 2 mm [.079 in ]

All AMP HPI 2.0 mm Receptacle Housings (60)



### Features

#### **Product Type Features**

Connector Product Type	Housing	
Connector & Housing Type	Receptacle	
Connector System	Wire-to-Board	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	5	
Number of Rows	1	
Electrical Characteristics		
Dielectric Withstanding Voltage (Max)	1000 VAC	
Insulation Resistance	1000 MΩ	
Operating Voltage	250 VAC	

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal, HPI



### **Body Features**

Primary Product Color	Natural				
Contact Features					
Contact Layout	Inline				
Contact Type	Socket				
Contact Base Material	Copper Alloy				
Contact Current Rating (Max)	3 A				
Termination Features					
Termination Method to Wire & Cable	Crimp				
Mechanical Attachment					
Strain Relief	Without				
Panel Mount Feature	Without				
PCB Mount Retention	Without				
Mating Retention Type	Detent				
Mating Retention	With				
Connector Mounting Type	Cable Mount (Free-Hanging)				

#### Housing Features

#### \_\_\_\_\_

Housing Entry Configuration	Both Ends Closed				
Housing Material	Thermoplastic				
Centerline (Pitch)	2 mm[.079 in]				
Dimensions					
Connector Length	11.8 mm[.465 in]				
Connector Height	4.5 mm[.177 in]				
Connector Width	6.9 mm[.272 in]				
Compatible Insulation Diameter Range	.9 – 1.5 mm[.035 – .059 in]				
Wire Size	.05 – .22 mm²				
Usage Conditions					
Operating Temperature Range	g Temperature Range -25 – 85 °C[-13 – 185 °F]				
Operation/Application					
Circuit Application	Power & Signal				
Industry Standards					

**C** For support call+1 800 522 6752

09/19/2023 12:28PM | Page 2

Housing, Receptacle, Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal, HPI



Glow Wire Rating	Standard Part - Not Glow Wire	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Bag/Carton	
Product Compliance		
Product Compliance For compliance documentation, visit the product page on TE.com>		
•	Compliant	
For compliance documentation, visit the product page on TE.com>	Compliant Compliant	
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU		

Does not contain REACH SVHC

2023 (235)

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

Housing, Receptacle, Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal, HPI





# Also in the Series | HPI

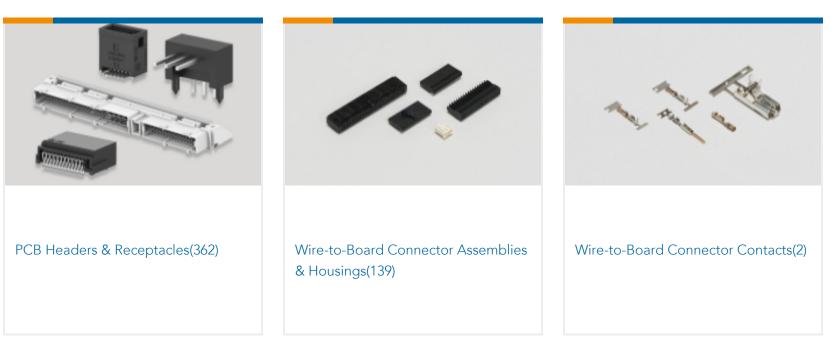

# Customers Also Bought



art #1658659-1	TE Part #440129-8	TE Part #6609048-6	TE Part #2-747579-7
HDP-20,ENCLSUR,PLUG,SIZE 3	AMP HPI 2.0 mm Receptacle Housings	6EQ3=F7263 S0	SHLDING FERRULE,PLTD TIN,BULK
	A CORESTE		
art #3-640430-8	TE Part #1735801-1	TE Part #CONREVSMA007	TE Part #6-1393224-3
MTA156 CONN ASSY 26AWG BLU	2.0mm,Crimp,Contact	RP-SMA Plug 50 Ohm Cable Crimp	RY213048

## Documents

Product Drawings 2.0MM,HSG,5POS

English

### **CAD** Files

3D PDF

3D

Housing, Receptacle, Wire-to-Board, 5 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal, HPI



**Customer View Model** 

ENG\_CVM\_CVM\_440129-5\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_440129-5\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_440129-5\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages **HPI Connectors QRG** 

English

**Product Specifications** 

**Application Specification** 

English

**Product Environmental Compliance** 

**Product Compliance** 

English

**Product Compliance** 

English

Agency Approvals

UL Report

English