440423-1 🗸 ACTIVE

TE Internal #: 440423-1 PCB Spring Contact, C-Clip, Uncompressed Height 5 mm [.197 in], Length 7 mm [.276 in], Width 2.5 mm [.098 in], 3.5 mm [.138 in] Working Range (Low)

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > PCB Spring Contacts



Spring Finger Type: C-Clip

Scalable: No

Side Protected: No

Uncompressed Height: 5 mm [.197 in]

Product Length: 7 mm [.276 in]

Features

Product Type Features

Spring Finger Type	C-Clip
Scalable	No
Connector System	Board-to-Board

Connector & Contact Terminates To

Printed Circuit Board

Configuration Features

Side Protected	No				
Number of Positions	1				
Contact Features					
Contact Underplating Material	Nickel				
PCB Contact Termination Area Plating Material	Gold				
Contact Base Material	Copper Alloy				
Contact Working Range (Low)	3.5 mm[.138 in]				
Contact Working Range (High)	4.25 mm[.167 in]				
Point of Contact Area Plating Material	Gold				
Contact Current Rating (Max)	1 A				
Dimensions					
Uncompressed Height	5 mm[.197 in]				
Product Length	7 mm[.276 in]				

440423-1

PCB Spring Contact, C-Clip, Uncompressed Height 5 mm [.197 in], Length 7 mm [.276 in], Width 2.5 mm [.098 in], 3.5 mm [.138 in] Working Range (Low)



Product Width	2.5 mm[.098 in]
Usage Conditions	
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	1500
Packaging Method	Tape & Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


440423-1

PCB Spring Contact, C-Clip, Uncompressed Height 5 mm [.197 in], Length 7 mm [.276 in], Width 2.5 mm [.098 in], 3.5 mm [.138 in] Working Range (Low)





Customers Also Bought

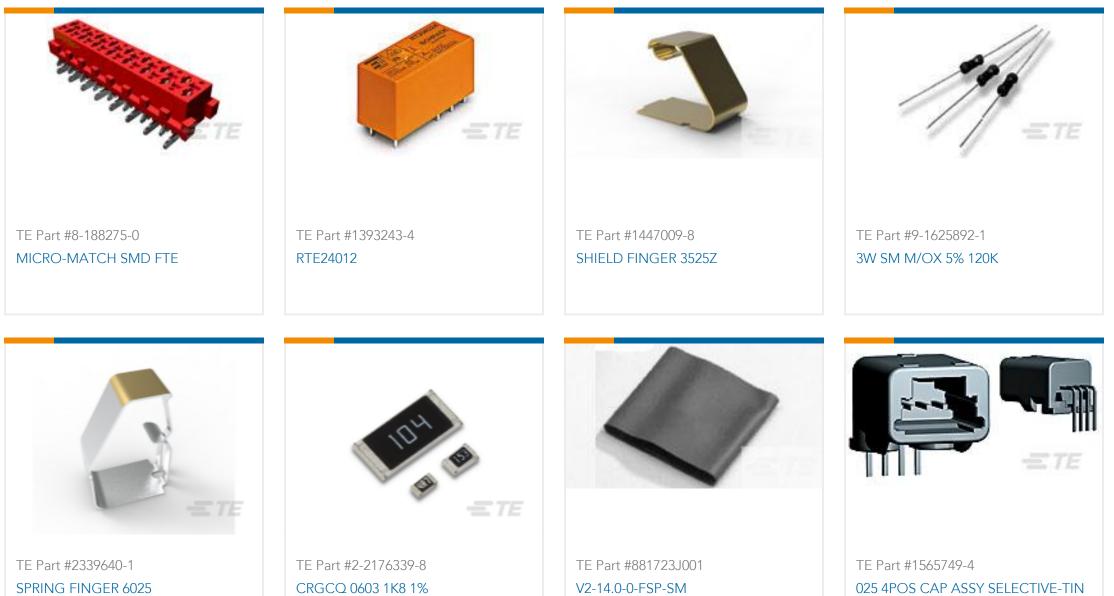

SPRING FINGER 6025	CRGCQ 0603 1K8 1%	V2-14.0-0-FSP-SM	025 4POS CAP ASSY SELECTIVE-T
ETE	= TE		
TE Part #50462-6 SOCKET,MIN-SPR AU SER-2	TE Part #926894-1 UNIV.M-N-L.PIN		

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_440423-1_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_440423-1_O.3d_igs.zip

English

440423-1

PCB Spring Contact, C-Clip, Uncompressed Height 5 mm [.197 in], Length 7 mm [.276 in], Width 2.5 mm [.098 in], 3.5 mm [.138 in] Working Range (Low)



Customer View Model

ENG_CVM_CVM_440423-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Products for Mobile Equipment

English

Product Specifications Product Specification

English