




Connectors > PCB Connectors > PCB Connector Accessories > PCB Connector Keying

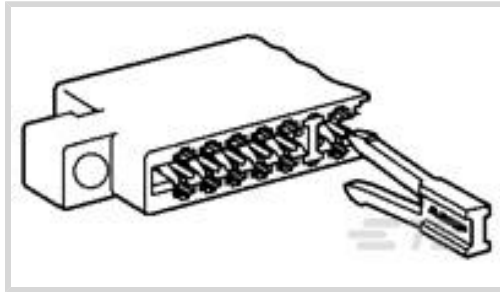

Connector Keying Accessory Type: **Keying Plug**

Operating Temperature Range: -55 – 105 °C [-67 – 221 °F]

## Features

### Product Type Features

Connector Keying Accessory Type	Keying Plug
---------------------------------	-------------

### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

### Packaging Features

Packaging Method	Bag
------------------	-----

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



TE Part # 583680-1  
HSG AMP LEAF 15 POS

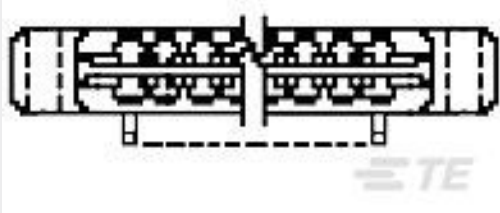

TE Part # 583545-1  
CONN AMP LEAF 156 C/L 15 POS

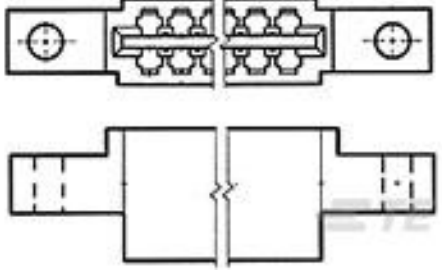


TE Part # 583722-1  
HSG AMP LEAF 6 POS



TE Part # 1-582147-4  
15 DUAL AMPLEAF HSG




TE Part # 1-582147-6  
15 DUAL AMPLEAF HSG

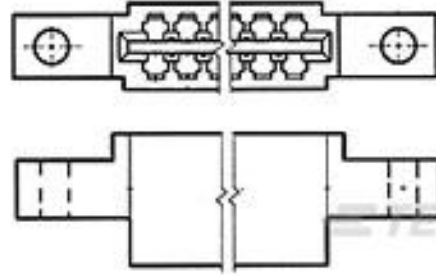

TE Part # 480110-2  
HSG AMP LEAF 15 POS



TE Part # 480110-4  
15 DUAL AMP LEAF HSG

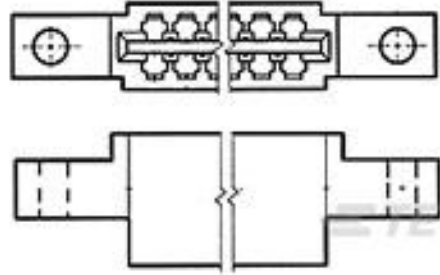


TE Part # 480110-5  
HSG AMP LEAF 15 POS



TE Part # 480110-6  
15 DUAL AMP LEAF HSG



TE Part # 480133-4  
18 DUAL AMPLEAF HSG

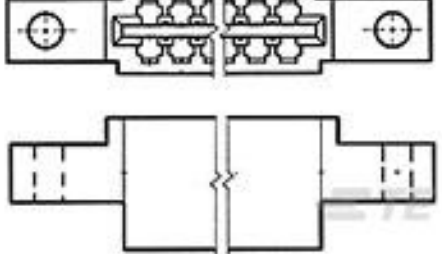

TE Part # 480142-3  
HSG AMP LEAF 22 POS



TE Part # 480142-4  
22 POS AMP LEAF HSG



TE Part # 480142-5  
22 POS AMP LEAF HSG



TE Part # 582500-4  
15 POS. DUAL AMP LEAF HSG.





TE Part # 582500-6  
15 DUAL AMPLEAF HSG



TE Part # 583552-2  
AMP LEAF 36 POS



## Customers Also Bought

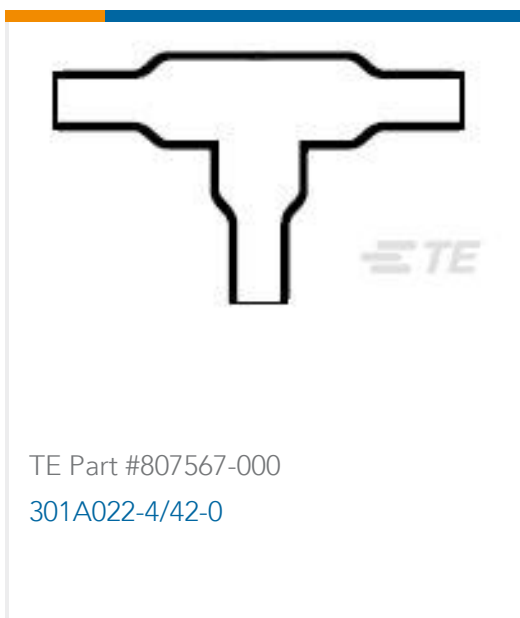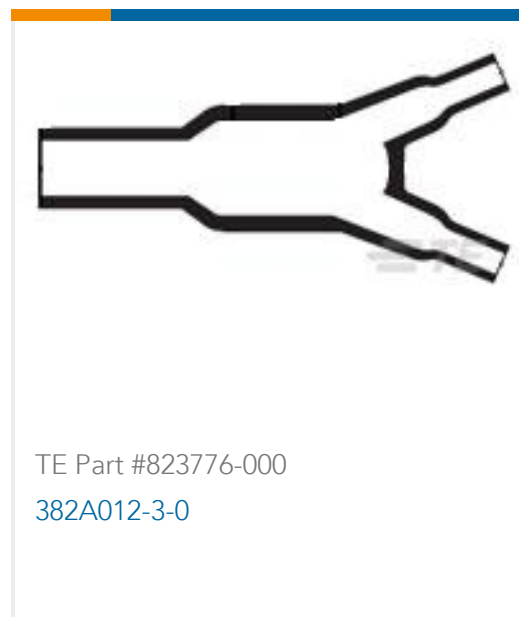

## Documents

[Product Drawings](#)  
[AMP LEAF KEYING PLUG](#)

English

[Product Specifications](#)  
[Product Specification](#)

English

[Connector, AMP-LEAF, .000030 Gold Plated Contacts, DPH Housing](#)

English



**Product Specification**

English

**Connector, AMP-LEAF, Phenolic or Thermoplastic Housing**

English

**Product Specification**

English

**Connector, AMP-LEAF, Tin Plated Contact**

English

---

**Instruction Sheets**

**Instruction Sheet (U.S.)**

English