487223-5 - ACTIVE

TE Internal #: 487223-5 FFC Connectors, Housing, Wire-to-Board, 20 Position, 2.54 mm [.1 in] Centerline, 2 Row, Socket, Package, Normal, Mating Alignment, Straight, Black

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FFC Connectors >

2.54mm FFC Connectors Receptacle Housing



FFC Connector Product Type: Housing

Connector System: Wire-to-Board

Number of Positions: 20

Centerline (Pitch): 2.54 mm [.1 in]

Number of Rows: 2

All 2.54mm FFC Connectors Receptacle Housing (143)



Features

Product Type Features

Connector & Housing Type	Receptacle					
FFC Connector Product Type	Housing					
Connector System	Wire-to-Board					
Connector & Contact Terminates To	Wire & Cable					
Insertion Force Type	Normal					
Configuration Features						
Number of Positions	20					
Number of Rows	2					
Electrical Characteristics						
Dielectric Withstanding Voltage (Max)	720 VAC					
Insulation Resistance	5000 MΩ					
Operating Voltage	300 VAC					

FFC Connectors, Housing, Wire-to-Board, 20 Position, 2.54 mm [.1 in] Centerline, 2 Row, Socket, Package, Normal, Mating Alignment, Straight, Black



Body Features

Primary Product Color	Black					
Contact Features						
Contact Type	Socket					
Mechanical Attachment						
Mating Alignment Type	Polarization					
Mating Retention	Without					
Mating Alignment	With					
Panel Mount Feature	Without					
Connector Mounting Type	Cable Mount (Free-Hanging)					
Connector Mounting Type Housing Features	Cable Mount (Free-Hanging)					
	Cable Mount (Free-Hanging) Thermoplastic					
Housing Features						
Housing Material	Thermoplastic					
Housing Features Housing Material Centerline (Pitch)	Thermoplastic 2.54 mm[.1 in]					
Housing Features Housing Material Centerline (Pitch) FFC Cable Entry	Thermoplastic 2.54 mm[.1 in]					

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Wire-to-Board Connector Comment	Use Extraction Tool No. 91093-1 for round wire contacts.
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

C For support call+1 800 522 6752

FFC Connectors, Housing, Wire-to-Board, 20 Position, 2.54 mm [.1 in] Centerline, 2 Row, Socket, Package, Normal, Mating Alignment, Straight, Black




EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

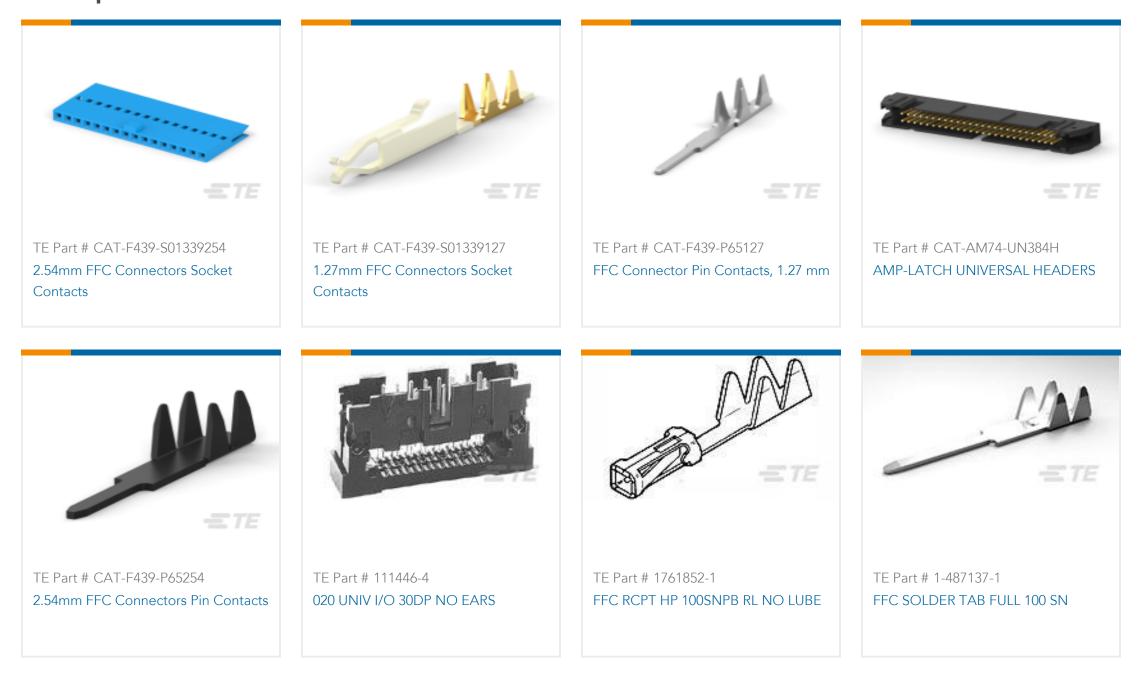

FFC Connectors, Housing, Wire-to-Board, 20 Position, 2.54 mm [.1 in] Centerline, 2 Row, Socket, Package, Normal, Mating Alignment, Straight, Black





Customers Also Bought



ULTRA-FAST 10/ ASY REC 22-10 AWG	SULIS R ZZ-16 CUIVIIVI ZZ-18 IVIIL Z	040 HOUSING FFC RCFT TOUCL DR	917 PLUG
TPBR			
TI DIX			

22 10 AVAIC



Documents

Product Drawings 020 HOUSING FFC RCPT 100CL DR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_487223-5_P.2d_dxf.zip

FFC Connectors, Housing, Wire-to-Board, 20 Position, 2.54 mm [.1 in] Centerline, 2 Row, Socket, Package, Normal, Mating Alignment, Straight, Black



English

Customer View Model ENG_CVM_CVM_487223-5_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_487223-5_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Extraction Tools

English

Agency Approvals Agency Approval Document

English