


### AMPMODU | AMPMODU Headers

TE Internal #: 5-102699-7 PCB Mount Header, Vertical, Wire-to-Board / Board-to-Board, 16 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, AMPMODU Headers

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board, Wire-to-Board

Number of Positions: 16

Number of Rows: 2

### Features

### **Product Type Features**

PCB Connector Assembly Type

Connector System

Header Type

PCB Mount Header

Board-to-Board, Wire-to-Board

Fully Shrouded

Connector & Contact	Terminates To
---------------------	---------------

Printed Circuit Board

### **Configuration Features**

Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	16
Number of Rows	2
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 Vrms
Body Features	
Primary Product Color	Black
Contact Features	
Mating Square Post Dimension	.64 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 μm[100 – 200 μin]

PCB Mount Header, Vertical, Wire-to-Board / Board-to-Board, 16 Position, 2.54 mm [. 1 in] Centerline, Fully Shrouded, Gold, AMPMODU Headers



Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.762 μm[30 μin]
Contact Type	Pin
Contact Current Rating (Max)	3 A
Termination Features	
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	6.35 mm[.25 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Mating Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Retention Type	Detent Window
Mating Alignment	With
Mating Alignment Type	Polarization
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	

PCB Mount Header, Vertical, Wire-to-Board / Board-to-Board, 16 Position, 2.54 mm [. 1 in] Centerline, Fully Shrouded, Gold, AMPMODU Headers



Agency/Standard	CSA
Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	130
Packaging Type	Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	Compliant
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in

other sources.


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


## **Compatible Parts**


PCB Mount Header, Vertical, Wire-to-Board / Board-to-Board, 16 Position, 2.54 mm [. 1 in] Centerline, Fully Shrouded, Gold, AMPMODU Headers



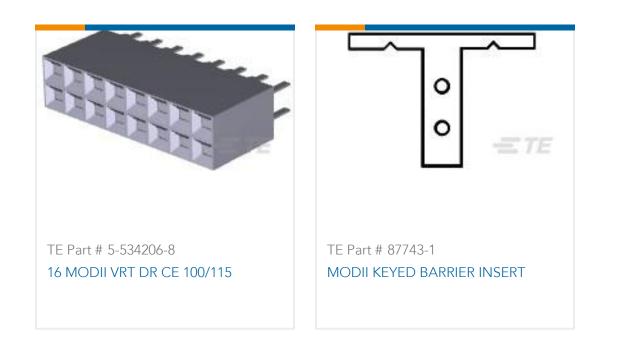


# Also in the Series AMPMODU Headers

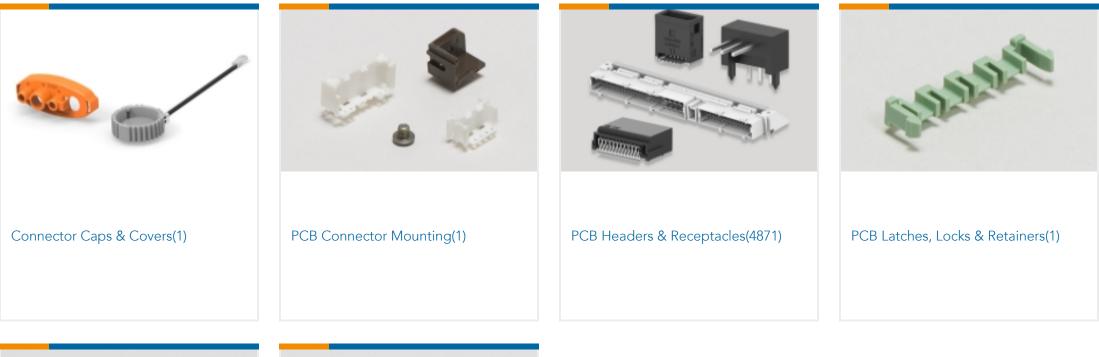

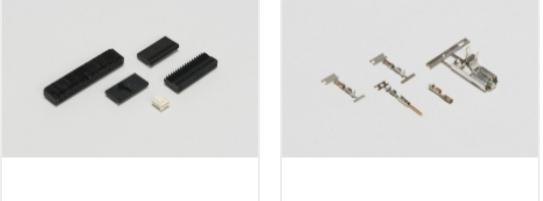

Wire-to-Board Connector Assemblies	Wire-to-Board Connector Contacts(65)
& Housings(5)	

## Customers Also Bought

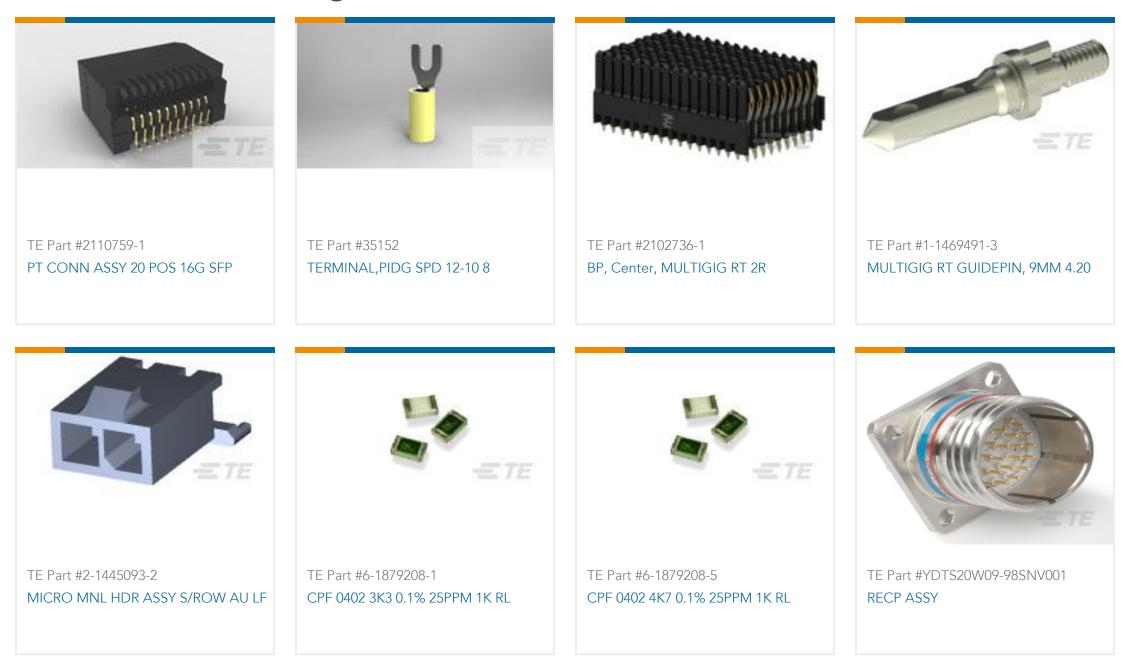

PCB Mount Header, Vertical, Wire-to-Board / Board-to-Board, 16 Position, 2.54 mm [. 1 in] Centerline, Fully Shrouded, Gold, AMPMODU Headers





## Documents

### **CAD** Files

### 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5-102699-7\_M.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-102699-7\_M.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-102699-7\_M.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

### **Datasheets & Catalog Pages** AMPMODU\_INTERCONNECTION\_SYSTEM\_SECTION5

English

**Product Specifications Application Specification** 

English

Product Environmental Compliance **TE Material Declaration** 

English