W57-XB6A99C10-7 <

Potter & Brumfield W57 TE Internal #: 5-1423364-5 Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 7A Current Rating, 1 Pole, Potter & Brumfield W57

View on TE.com >

Relays, Contactors & Switches > Circuit Breakers



Circuit Breaker Type: Thermal

Circuit Function: Series Trip

Illuminated: No

Actuator Color: White

Operating Voltage: 250 VAC

Features

Product Type Features

Illumination TypeNo LightActuator TypePush to ResetTerminal Configuration6.35 [.25] Straight Quick Connect Tab



Circuit Breaker Type	Thermal
Illuminated	No
Configuration Features	
	.441 x .394 in
Circuit Function	Series Trip
Number of Poles	1
Electrical Characteristics	
Operating Voltage	50 VDC
Current Rating	7 A
Interrupt Capacity	1000A @ 250VAC/50VDC
Body Features	
Actuator Color	White
Contact Features	
Trip Time at 200%	4 – 40 seconds
Mechanical Attachment	

C For support call+1 800 522 6752

W57-XB6A99C10-7

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 7A Current Rating, 1 Pole, Potter & Brumfield W57



Mounting Hardware Packaging	No Mounting Hardware
Mounting Bushing	3/8" (One Side Flat) x 10.5mm Long, Metal
Mounting Options	None
Identification Marking	
Stamped Marking Type	Red Rate Marking
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Cadmium oxide (7.95% in Contact)

Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


W57-XB6A99C10-7

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 7A Current Rating, 1 Pole, Potter & Brumfield W57








Also in the Series | Potter & Brumfield W57



Customers Also Bought

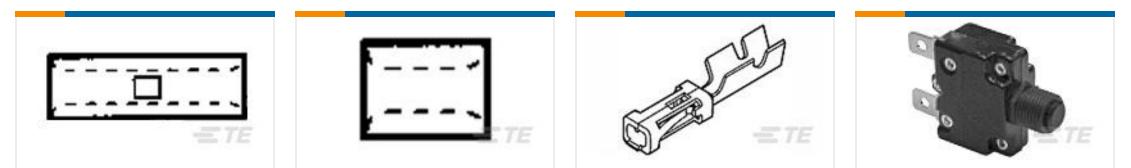

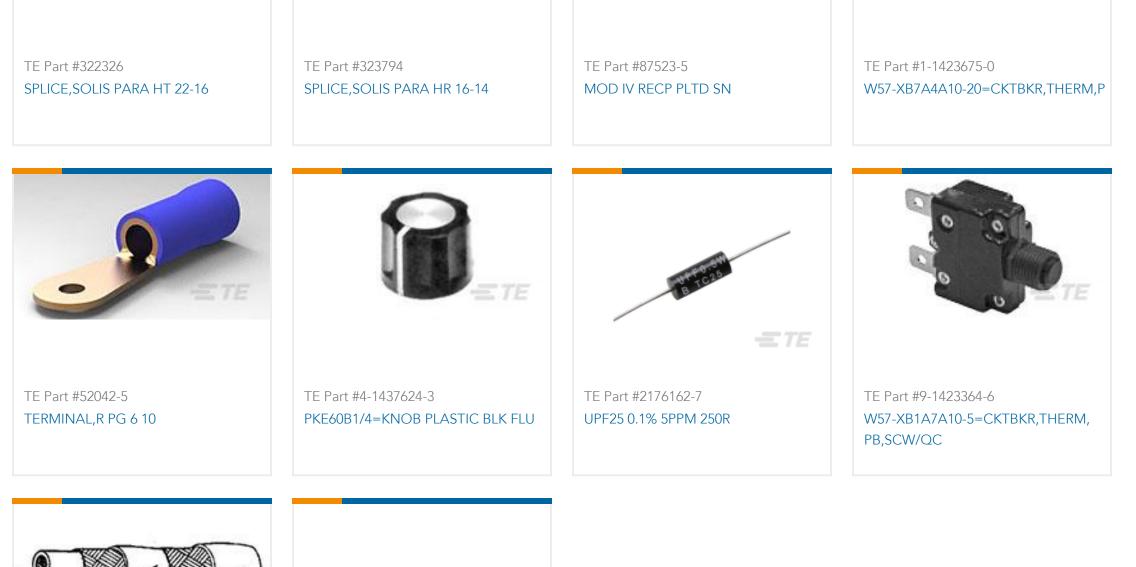

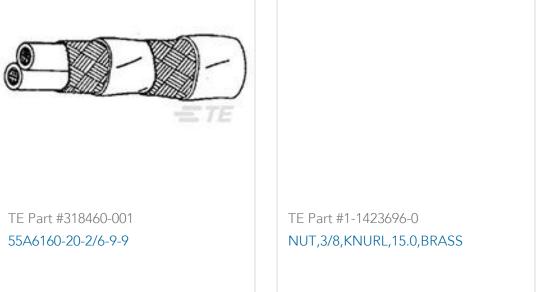

W57-XB6A99C10-7

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 7A Current Rating, 1 Pole, Potter & Brumfield W57



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1423364-5_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1423364-5_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-1423364-5_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages W57 Compact Push To Reset Only Thermal Circuit Breaker

English

Agency Approvals CCC Certificate

English