

AMPMODU | AMPMODU Headers

TE Internal #: 5-146285-3 PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [. 1 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU Headers

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: **3**

Number of Rows: 1

Features

Product Type Features

PCB Connector Assembly Type

Connector System

Header Type

PCB Mount Header

Board-to-Board

Breakaway

Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Connector Contact Load Condition	Fully Loaded	
PCB Mount Orientation	Vertical	
Number of Positions	3	
Number of Rows	1	
Board-to-Board Configuration	Parallel	
Body Features		
Primary Product Color	Black	
Contact Features		
Mating Square Post Dimension	.64 mm[.025 in]	
	100 – 200 µin	
PCB Contact Termination Area Plating Material Finish	Matte	
Contact Shape & Form	Square	

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU Headers



Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.762 μm[30 μin]
Contact Type	Pin
Contact Current Rating (Max)	3 A
Termination Features	
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	2.29 mm[.09 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	Without
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	LCP (Liquid Crystal Polymer), LCP-GF (Liquid Crystal Polymer)
Dimensions	
PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Housing Temperature Rating	High
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	540

Centerline (Pitch)	2.54 mm[.1 in]			
Housing Material	LCP (Liquid Crystal Polymer), LCP-GF (Liquid Crystal Polymer)			
Dimensions				
PCB Thickness (Recommended)	1.6 mm[.063 in]			
Usage Conditions				
Housing Temperature Rating	High			
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]			
Operation/Application				
Circuit Application	Signal			
Industry Standards				
Approved Standards	CSA LR7189, UL E28476			
UL Flammability Rating	UL 94V-0			
Packaging Features				
Packaging Quantity	540			

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU Headers



Packaging Type

Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free	
Solder Process Capability	Pin-in-Paste capable to 260°C	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series AMPMODU Headers

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU Headers





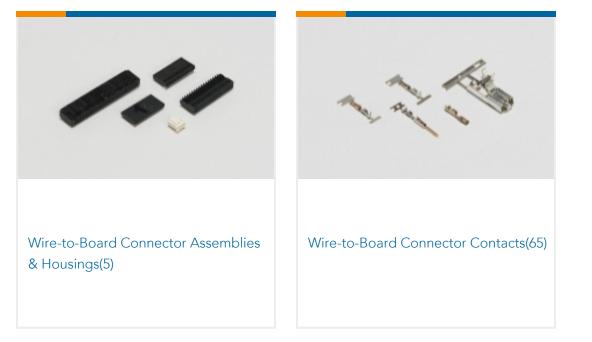

Customers Also Bought



TE Part #1981284-4 SEMI-HARD TRAY DDR2 SODIMM 9.2 H STD AMC	TE Part #2170704-2 CAGE ASSY, QSFP28 1X1, SPRING, HS	TE Part #794287-1 04P CMNL HDR ASSY BLK HT	TE Part #1888631-2 Cage Assy SAN Hsink QSFP Thru Bezel
		TTE	€ TE
TE Part #104128-9 050 LOPRO HDR SP 30DP LATCH	TE Part #1410187-1 MULTIGIG RT T2 7RW DC DF CT	TE Part #2-1761465-2 PCI Express RA assy 5.8mm slot 2.3 mm pc	TE Part #8-1625867-1 RP 1J 0.166W 43R2 0.1% 25PPM 1K RL



Documents

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Breakaway, Gold, Through Hole - Solder, Signal, AMPMODU Headers



Product Drawings 03 MODII HDR SRST B/A .100CL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-146285-3_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-146285-3_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-146285-3_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English