


Power Triple Lock TE Internal #: 5-1971876-7 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

#### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > High Temperature Plug — POWER TRIPLE LOCK

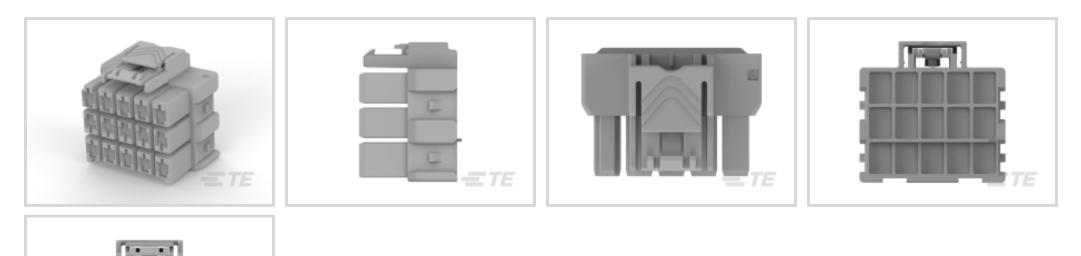

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 15

Centerline (Pitch): 6 mm [.236 in ]

All High Temperature Plug — POWER TRIPLE LOCK (43)

### Features

### **Product Type Features**

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	15
Number of Power Positions	15
Number of Rows	3
Electrical Characteristics	
Operating Voltage	600 VDC
Body Features	

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°	
Connector & Keying Code	A	
Contact Features		
Contact Layout	Matrix	
Contact Retention Within Housing	Without	
Contact Type	Receptacle	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Panel Mount Feature	Without	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	6 mm[.236 in]	
Housing Color	Gray	
Housing Material	Nylon	
Dimensions		
Row-to-Row Spacing	8.1 mm[.319 in]	

# Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]	
Operation/Application		
Circuit Application	Power	
Identification Marking		
Circuit Identification Feature	With	
Industry Standards		
Glow Wire Material Rating	Material with GWIT $\geq$ 775°C	
UL Rating	Recognized	
Agency/Standard	UL, VDE	
Approved Standards	UL E28476	
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)	
Packaging Features		

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock




Packaging Method	Carton
Other	
Power Connectors Comment	Complies with IEC 61984 Specification
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

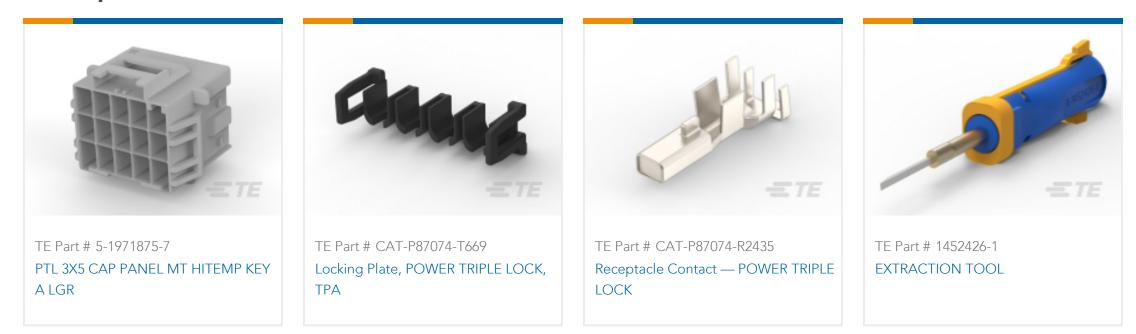


Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





# Also in the Series | Power Triple Lock

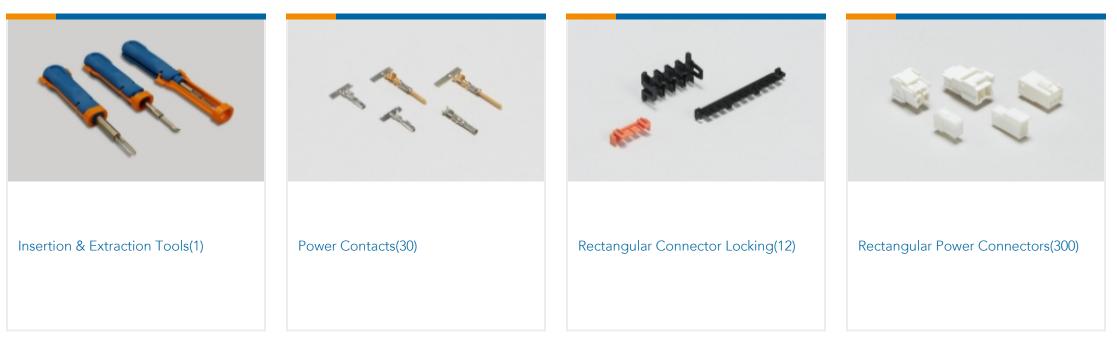

# Customers Also Bought



-E TE		= TE	
TE Part #5-1971875-7	TE Part #1971777-5	TE Part #1971785-2	TE Part #60650-1
POWER TRIPLE LOCK High	Locking Plate, POWER TRIPLE LOCK,	Receptacle Contact — POWER TRIPLE	250 FASTON FLAG REC 18-14 AWG
Temperature Caps	TPA	LOCK	BR

# Documents

Product Drawings PTL 3X5 PLUG HSG HIGH TEMP KEY A LGR

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5-1971876-7\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-1971876-7\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-1971876-7\_E.3d\_stp.zip

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



### English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

#### 1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

**Product Specifications** 

**Application Specification** 

English

Product Environmental Compliance

### **TE Material Declaration**

English

Agency Approvals

VDE Certificate

English

**VDE** Certificate

English