5-445705-4 - ACTIVE

### AMPLIMITE

TE Internal #: 5-445705-4 Box Mount D-Sub Connectors, Receptacle, Cable-to-Cable, 3 Position, Power/Signal/Coax Combination, 2 Connector Shell Size, Socket, Contact Size Size 8

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > Box Mount D-Sub Connectors



# Connector & Housing Type: Receptacle

Connector System: Cable-to-Cable

Number of Positions: 3

Power/Signal/Coax Combination: Yes

Connector Shell Size: 2

## Features

# **Product Type Features**

Connector & Housing Type	Receptacle
Connector System	Cable-to-Cable
Connector Shell Size	2

Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Power/Signal/Coax Combination	Yes
Body Features	
Rear Shell Material	Steel
Rear Shell Plating Material	Zinc
Front Shell Plating Material	Zinc
Mating Retention Feature Material	Stainless Steel
Front Shell Material	Steel
D-Sub Connector Insert Arrangement	3C3
Contact Features	
Contact Type	Socket
Contact Size	Size 8

**C** For support call+1 800 522 6752

09/27/2023 01:28PM | Page 1

## 5-445705-4

Box Mount D-Sub Connectors, Receptacle, Cable-to-Cable, 3 Position, Power/Signal /Coax Combination, 2 Connector Shell Size, Socket, Contact Size Size 8



Contact Current Rating (Max)	32 A
Mechanical Attachment	
Mounting Hole Diameter	3.05 mm[.12 in]
Mating Alignment	Without
Housing Features	
Centerline (Pitch)	2.77 mm[.109 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Method	Package
Other	
D-Shaped Connectors Comment	Cable clamp/strain relief hardware cannot be used with these arrangements.

# Product Compliance

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous


## 5-445705-4

Box Mount D-Sub Connectors, Receptacle, Cable-to-Cable, 3 Position, Power/Signal /Coax Combination, 2 Connector Shell Size, Socket, Contact Size Size 8



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Customers Also Bought**

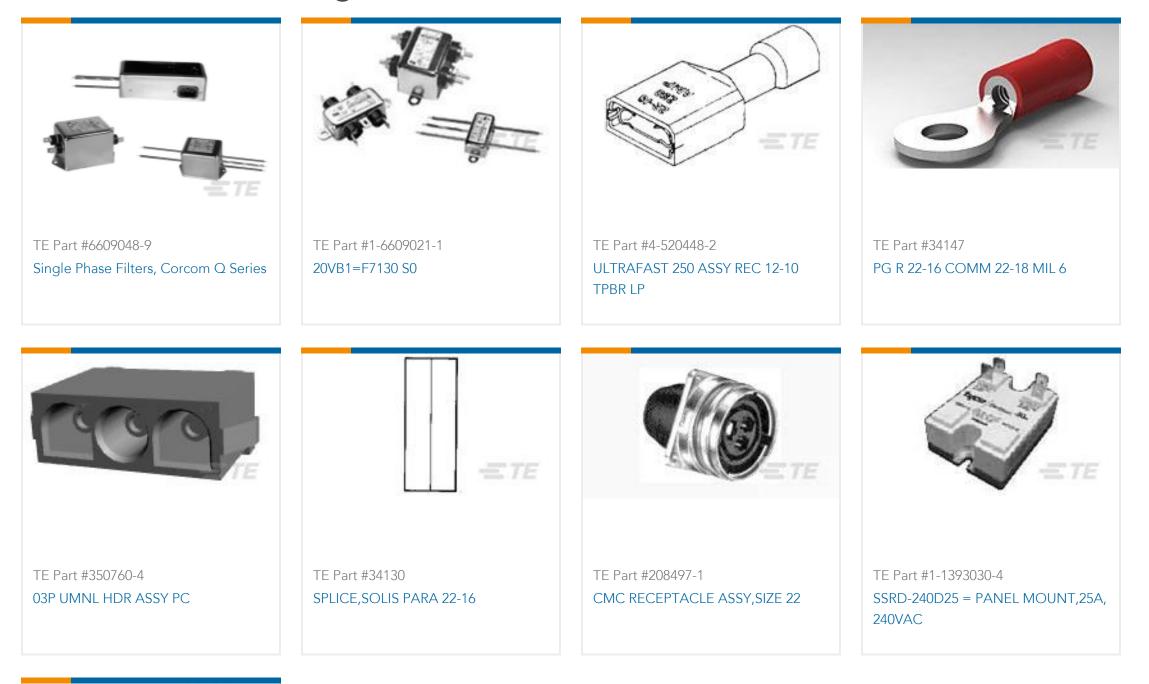



# Documents

Product Drawings AMPLIMITE,ASY,RCPT,3C3,COAX

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5-445705-4\_W.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-445705-4\_W.3d\_igs.zip

## 5-445705-4

Box Mount D-Sub Connectors, Receptacle, Cable-to-Cable, 3 Position, Power/Signal /Coax Combination, 2 Connector Shell Size, Socket, Contact Size Size 8



English

Customer View Model ENG\_CVM\_CVM\_5-445705-4\_W.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals Agency Approval Document

English