
5-66461-8 <

## AMP | AMP Type III+

TE Internal #: 5-66461-8 Power Contacts, Contact, Tin, 32 AWG Wire Size, .03 mm<sup>2</sup> Wire Size, Wire & Cable, Wire Wrap, Power & Signal, Socket, AMP Type III+

### View on TE.com >

#### Connectors > Power Connectors > Power Contacts

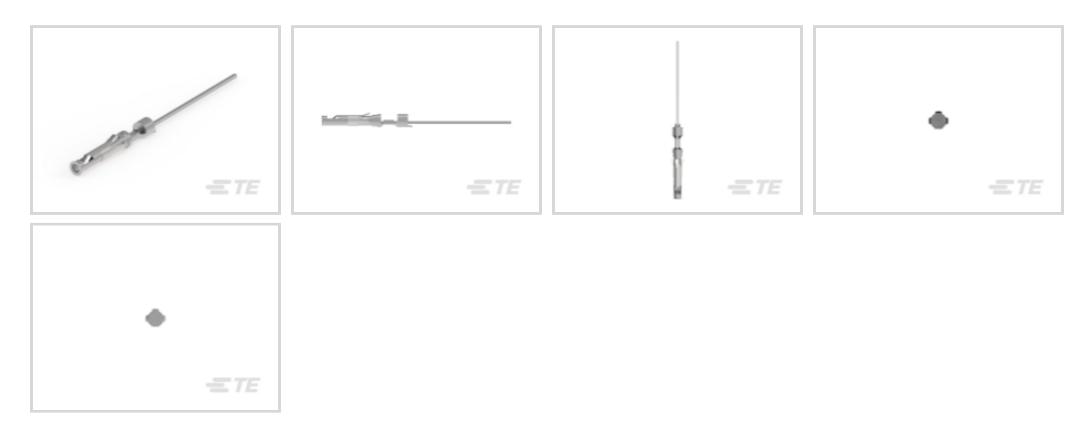

Power Contact Type: Contact

Contact Mating Area Plating Material: Tin

Wire Size: .03 mm<sup>2</sup>

Connector & Contact Terminates To: Wire & Cable

## Features

#### **Product Type Features**



| Product Type Features                                 |                  |  |  |  |  |  |
|---|------------------|--|--|--|--|--|
| Power Contact Type                                    | Contact          |  |  |  |  |  |
| Connector & Contact Terminates To                     | Wire & Cable     |  |  |  |  |  |
| Contact Features                                      |                  |  |  |  |  |  |
| Contact Size  | Size 16          |  |  |  |  |  |
| Contact Shape & Form                                  | Square           |  |  |  |  |  |
| Contact Mating Area Plating Material                  | Tin              |  |  |  |  |  |
| Contact Current Rating (Max)                          | 13 A             |  |  |  |  |  |
| Contact Type  | Socket           |  |  |  |  |  |
| Mating Pin Diameter                                   | 1.57 mm[.062 in] |  |  |  |  |  |
| Contact Base Material                                 | Brass            |  |  |  |  |  |
| Contact Mating Area Plating Material Thickness        | 2.54 μm[100 μin] |  |  |  |  |  |
| Wire Contact Termination Area Plating Thickness       | 2.54 μm[100 μin] |  |  |  |  |  |
| Wire Contact Termination Area Plating Material        | Tin              |  |  |  |  |  |
| Wire Contact Termination Area Plating Material Finish | Bright           |  |  |  |  |  |
| Contact Orientation                                   | Straight         |  |  |  |  |  |

## 5-66461-8

Power Contacts, Contact, Tin, 32 AWG Wire Size, .03 mm<sup>2</sup> Wire Size, Wire & Cable, Wire Wrap, Power & Signal, Socket, AMP Type III+



| Contact Underplating Material           | Nickel                    |
|---|---------------------------|
| Contact Underplating Material Thickness | 1.27 μm[50 μin]           |
| Termination Features                    |                           |
| Termination Method to Wire & Cable      | Wire Wrap                 |
| Mechanical Attachment                   |                           |
| Wire Insulation Support                 | Without                   |
| Dimensions                              |                           |
| Wire Size                               | .03 mm <sup>2</sup>       |
| Usage Conditions                        |                           |
| Operating Temperature Range             | -55 – 90 °C[-67 – 194 °F] |
| Operation/Application                   |                           |
| Circuit Application                     | Power & Signal            |
| Packaging Features                      |                           |
| Packaging Quantity                      | 1000                      |
| Packaging Method                        | Carton                    |
|   |                           |

### **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free   |
| Solder Process Capability                     | Not applicable for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

## 5-66461-8

Power Contacts, Contact, Tin, 32 AWG Wire Size, .03 mm<sup>2</sup> Wire Size, Wire & Cable, Wire Wrap, Power & Signal, Socket, AMP Type III+




will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


## **Compatible Parts**




# Also in the Series | AMP Type III+

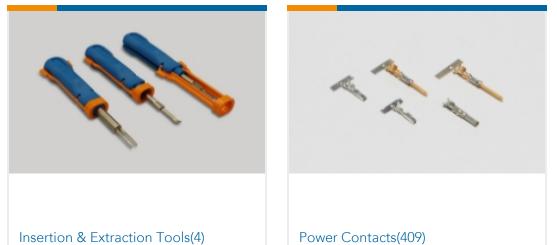

# Customers Also Bought

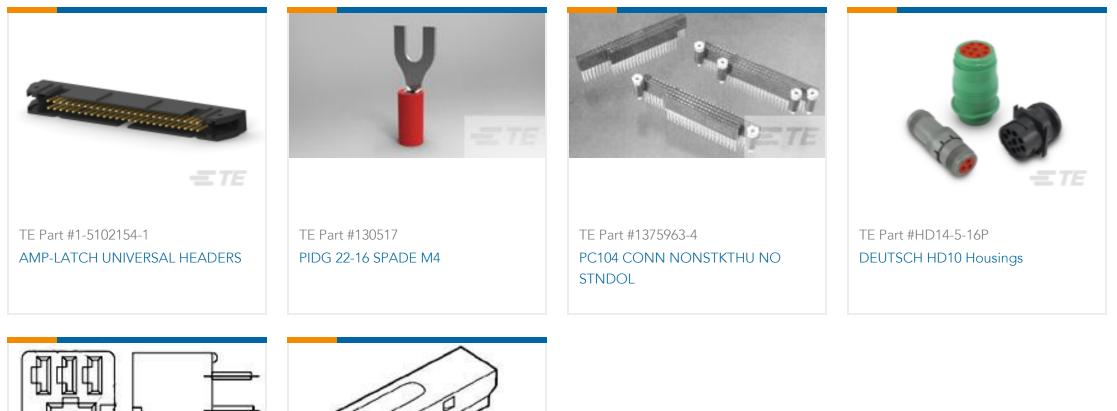

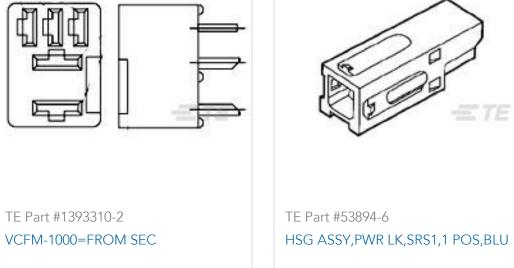

## 5-66461-8

Power Contacts, Contact, Tin, 32 AWG Wire Size, .03 mm<sup>2</sup> Wire Size, Wire & Cable, Wire Wrap, Power & Signal, Socket, AMP Type III+



## Documents

CAD Files 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5-66461-8\_BV.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-66461-8\_BV.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-66461-8\_BV.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Signal Contacts

English

M\_SERIES\_PIN\_AND\_SOCKET\_CONNECTORS

English

Instruction Sheets Instruction Sheet (U.S.)

English

Autowire Contacts and Connectors

English