SRFR-4/2.9-8-SP <

RAYCHEM

TE Internal #: 5039934010 Gray, 1.38:1, Single Wall Tubing, Shrinks To .625 in [15.87 mm], Silicone Rubber, 1.25 in [31.75 mm] Inner Diameter, Highly Flame-Resistant, Piece

View on TE.com >



Heat Shrink Tubing

Primary Product Color: Gray Wall Type: Single Wall Expanded Inside Diameter (Min): 31.75 mm [1.25 in] Recovered Inside Diameter (Max): 15.87 mm [.625 in] Shrink Ratio: 1.38:1

Features

Product Type Features

Wall Type	Single Wall
Electrical Characteristics	
Operating Voltage (Max)	.6 kV
Body Features	
Primary Product Color	Gray
Shrink Ratio	1.38:1
Primary Product Material	Silicone Rubber
Flexibility	Very Flexible
Dimensions	
Recovered Wall Thickness (Nominal)	.5 mm[.02 in]
Expanded Inside Diameter (Min)	31.75 mm[1.25 in]
Recovered Inside Diameter (Max)	15.87 mm[.625 in]
Tubing Size Range	15.88 – 31.75 mm[.625 – 1.25 in]
Usage Conditions	
Shrink Temperature (Min)	135 °C
Fluid Resistance	None
Tubing Flammability Type	Highly Flame-Resistant
Operating Temperature Range	-75 – 200 °C
Recovery Temperature	175 °C
Operation/Application	

C For support call+1 800 522 6752

SRFR-4/2.9-8-SP

Gray, 1.38:1, Single Wall Tubing, Shrinks To .625 in [15.87 mm], Silicone Rubber, 1.25 in [31.75 mm] Inner Diameter, Highly Flame-Resistant, Piece



Mechanical Resistance	Radiation Sterilization
Product Availability	
Applicable Region	Worldwide
Packaging Features	
Packaging Method	Piece
Other	
Meets Low Outgassing Requirements	No
Product Source	UK
Draduct Compliance	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought

SRFR-4/2.9-8-SP

Gray, 1.38:1, Single Wall Tubing, Shrinks To .625 in [15.87 mm], Silicone Rubber, 1.25 in [31.75 mm] Inner Diameter, Highly Flame-Resistant, Piece



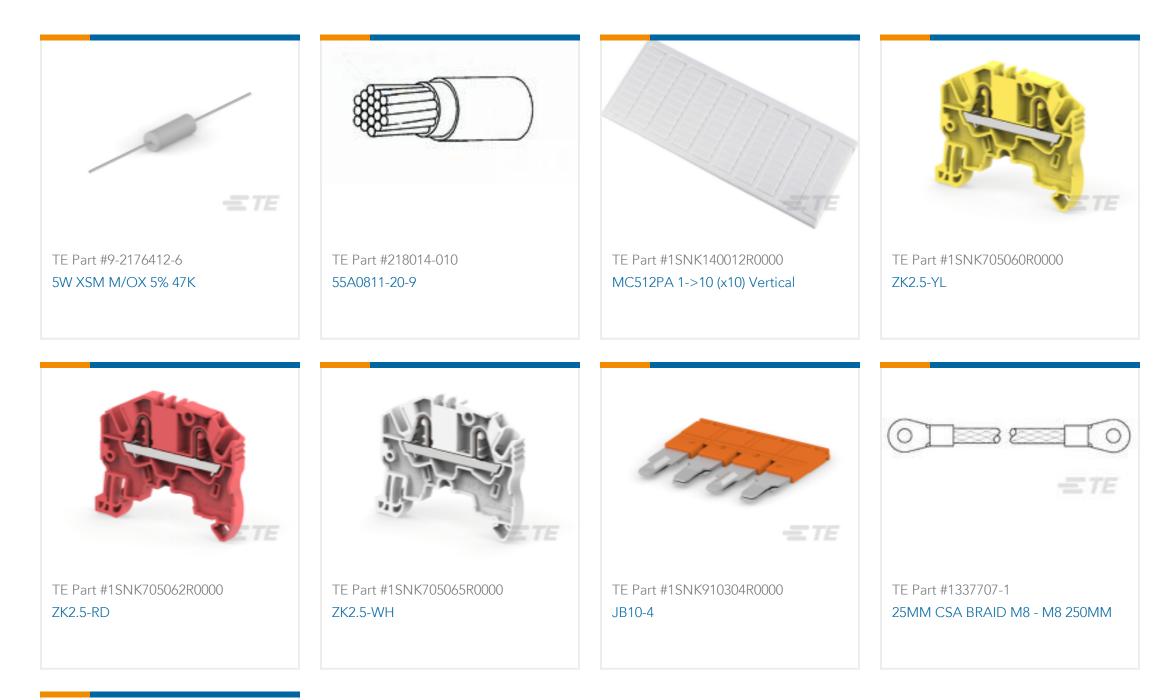



Documents

Product Drawings SRFR-4/2.9-8-SP

English

Datasheets & Catalog Pages raychem-tubing-product-selection-guide English 1654025_Sec3_SRFR English