
TE Internal #: 5176139-2

Card Edge Power Connectors, Board-to-Board, 98 Position, 2.54 mm [.1 in] Centerline, Power & Signal, 98 Power Positions, 0 Signal Positions





Connectors > PCB Connectors > Card Edge Connectors > Card Edge Power Connectors

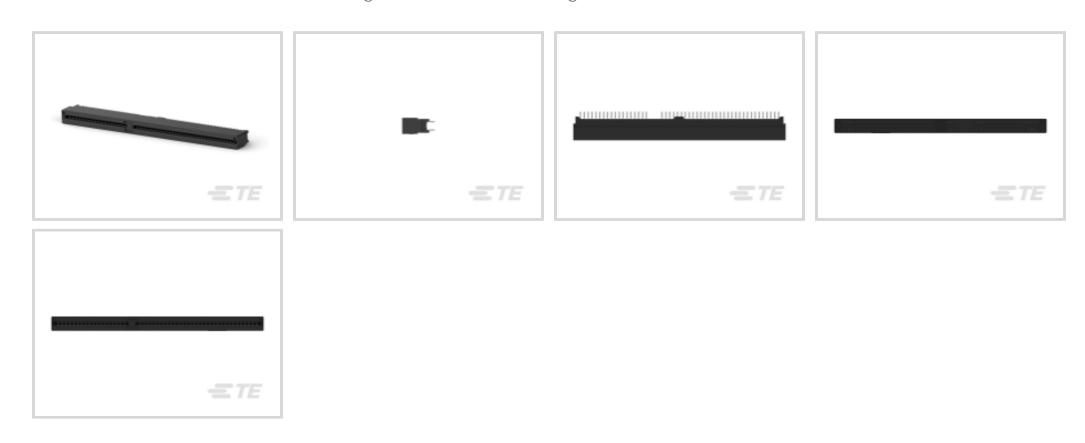

Connector System: Board-to-Board

Number of Positions: 98

Centerline (Pitch): 2.54 mm [.1 in]

Connector & Contact Terminates To: Printed Circuit Board

Contact Current Rating (Max): 3A

## **Features**

## Product Type Features

Connector Mates With	Printed Circuit Board
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Keying & Polarized Position Locations	0
Number of Sections	2
PCB Mount Orientation	Vertical
Number of Positions	98
Number of Power Positions	98
Number of Signal Positions	O
Number of Dual Positions	49
Electrical Characteristics	
Operating Voltage	400 V



## **Body Features**

Deay i datares	
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	2.54 μm[100 μin]
Contact Type	Socket
Contact Mating Area Plating Material Thickness	.38 μm[15 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A
Contact Mating Area Plating Material	Gold
Termination Features	
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Retention	Without
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Solder Tail
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Card Slot Depth	7.49 mm[.295 in]
Connector Height	15.49 mm[.61 in]
Row-to-Row Spacing	4.85 mm[.191 in]
Power Contact Centerline	2.54 mm[.1 in]
Usage Conditions	



Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	72
Packaging Method	Package
Other	
Position Locations Omitted	0

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts






# Customers Also Bought




















## **Documents**

Product Drawings

CONN SEC II 49 POS 100C/L

English

### **CAD Files**

Customer View Model ENG\_CVM\_CVM\_5176139-2\_F.2d\_dxf.zip

English

3D PDF



3D

**Customer View Model** 

ENG\_CVM\_CVM\_5176139-2\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5176139-2\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English

**Product Environmental Compliance** 

TE Material Declaration

English