

51826 ✓ ACTIVE

COPALUM


TE Internal #: 51826

Splices, Butt Splice, 12 – 10 AWG Wire Size, 5 mm² Wire Size, 5180 – 13100 CMA Wire Size, Copper, Box, Open, Stranded / Solid Wire

[View on TE.com >](#)



Terminals & Splices > Splices > COPALUM Stranded/Solid: Butt Splices

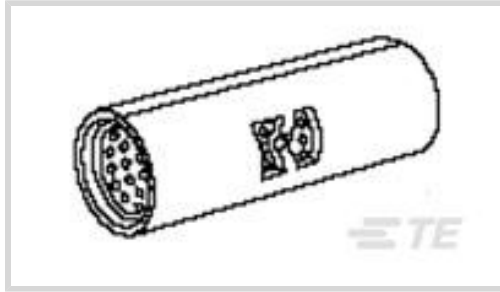

Wire Size: 5180 – 13100 CMA

Sealable: No

Compatible Insulation Diameter Range: 5.82 mm [.207 in]

[All COPALUM Stranded/Solid: Butt Splices \(9\)](#)

Features

Product Type Features

Splice Accessory Type	Splice
Sealable	No
Splice Type	Butt Splice
Compatible With Discrete Wire Type	Solid, Stranded

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Product Weight	9.757 g
----------------	---------

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Open

Dimensions

Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	5.82 mm[.207 in]
Terminal Material Thickness	1.58 mm[.062 in]

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------



Operating Temperature Range -65 – 175 °C[-85 – 347 °F]

Operation/Application

Compatible With Wire Base Material Aluminum, Copper

Packaging Features

Packaging Quantity 40000

Packaging Method Box

Other

Terminals & Splices Comment Not approved for reconnection of residential aluminum branch circuit wiring., When two or more wires are used in a parallel splice, the combined cross-sectional area must be within the CMA range listed.

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Not Compliant

EU ELV Directive 2000/53/EC Not Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023 (235)
Candidate List Declared Against: JUL 2021 (219)
Does not contain REACH SVHC

Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

Product Drawings

[SPLICE,COPALUM BUTT 8 12-10](#)

English

CAD Files

Customer View Model

[ENG_CVM_51826_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_51826_D.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_51826_D.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[COPALUM Lite Sealed Terminals and Splices](#)

English

Product Specifications

[Application Specification](#)



English

[COPALUM Terminals And Splices For Solid And Stranded Wire](#)

English

[Application Specification](#)

Japanese

[Copalum Terminals & Splices f/Solid & Stranded Wire](#)

Japanese

[Agency Approvals](#)

[UL Report](#)

English

[UL Report](#)

English