


PLASTI-GRIP

TE Internal #: 52046-1

Closed Ring Tongue Terminal, 00 AWG, 5/16 / M8 Stud Size, 7.92 mm [.312 in] Stud Diameter, Closed Barrel, Straight, Tin, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Ring Terminals

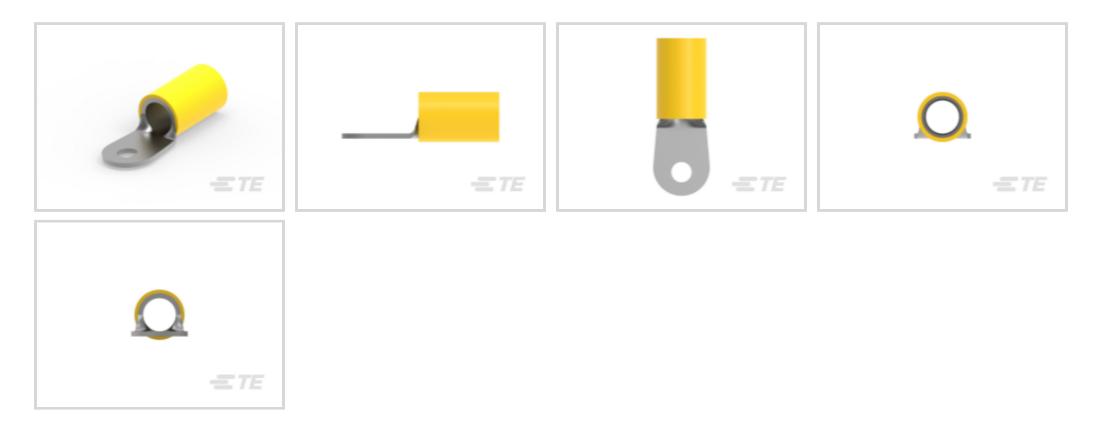

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 119500 – 150500 CMA

Stud Size: 5/16, M8

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal	
Stud Size	5/16, M8	
Sealable	No	
Wire Insulation Support Retention Type	Insulation Support	
Configuration Features		
Number of Holes	1	
Electrical Characteristics		
Voltage Rating	600 V	
Body Features		
Insulation Sleeve Color	Yellow	
Stripe Color	Yellow	
Contact Features		
Barrel Type	Closed	
Terminal Orientation	Straight	
Terminal Plating Material	Tin	



52046-1

Closed Ring Tongue Terminal, 00 AWG, 5/16 / M8 Stud Size, 7.92 mm [.312 in] Stud Diameter, Closed Barrel, Straight, Tin, PLASTI-GRIP



Mechanical Attachment

Wire Insulation Support	With	
Dimensions		
Wire Size	119500 – 150500 CMA	
Stud Diameter	7.92 mm[.312 in]	
Tongue Thickness	.79 mm[.031 in]	
Product Length	62.15 mm[2.447 in]	
Compatible Insulation Diameter (Max)	19.69 mm[.775 in]	
Compatible Insulation Diameter Range	19.69 mm[.775 in]	
Usage Conditions		
Insulation Option	Partially Insulated	
Operating Temperature Range	105 °C[221 °F]	
Operation/Application		
Compatible With Wire Base Material	Copper	
Compatible With Wire Plating Material	Tin	
Industry Standards		
Government Qualified Terminal	No	

Packaging Features

Packaging Quantity	50	
Packaging Method	Loose Piece	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

C For support call+1 800 522 6752

52046-1

Closed Ring Tongue Terminal, 00 AWG, 5/16 / M8 Stud Size, 7.92 mm [.312 in] Stud Diameter, Closed Barrel, Straight, Tin, PLASTI-GRIP



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | PLASTI-GRIP

			2 2 2 4 2 2 2 4 2 2 2 4
Compression Connectors(3)	Crimp Wire Pins, Tabs & Ferrules(25)	Ring Terminals(333)	Spade Terminals(195)



Customers Also Bought

52046-1

Closed Ring Tongue Terminal, 00 AWG, 5/16 / M8 Stud Size, 7.92 mm [.312 in] Stud Diameter, Closed Barrel, Straight, Tin, PLASTI-GRIP





Documents

Product Drawings TERMINAL R PG 2/0 5/16

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_52046-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_52046-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_52046-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English

UL Report

English