

Ultra-Pod | Ultra-Pod 250

TE Internal #: 521747-1


Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Ultra-

Pod 250

View on TE.com >



Terminals & Splices > Quick Disconnects











Quick Disconnect Terminal Type: Tab

Wire Size: .82 – 2.08 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Voltage Rating	600 V
Body Features	
Insulation Material	Nylon
Contact Features	
Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp



Barrel Type	Open
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Mating Retention Type	Dimple
Dimensions	
Terminal Material Thickness	.4 mm[.015 in]
Product Length	38.87 mm[1.53 in]
Compatible Insulation Diameter Range	3.3 – 4.57 mm[.13 – .18 in]
Wire Size	.82 – 2.08 mm²
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
Industry Standards	
UL Flammability Rating	UL 94V-2
Packaging Features	
Packaging Quantity	1500
Packaging Method	Strip/Reel
Other	

Line

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

FASTON .250



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts











Also in the Series | Ultra-Pod 250

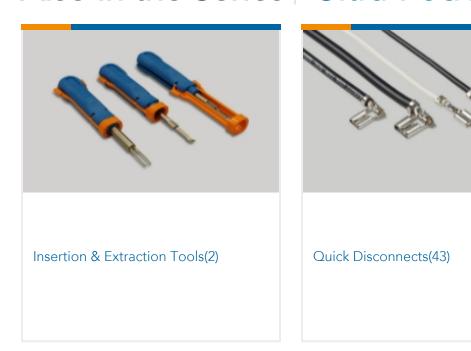

Customers Also Bought














TE Part #2286003-1 DT06-2S-SDT-CE27-2POS,CE,SOC. HSG



TE Part #927836-1 SPT REC 6.3 Contact SWS Sn









Documents

Product Drawings

ULTRA-POD 250 ASSY TAB 18-14 AWG BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_521747-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_521747-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_521747-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English