

5227222-2 ✓ ACTIVE

TE Internal #: 5227222-2

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Board / Cable-to-Panel, 1 Position, Printed Circuit Board, Panel Mount

[View on TE.com >](#)



Connectors > RF Connectors > Coax Connectors > BNC Vertical Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism



RF Interface: **BNC**

RF Connector Style: **Jack**

RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**

Impedance: **50 Ω**

RF Connector Coupling Mechanism: **Bayonet**

[All BNC Vertical Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism \(32\)](#)

Features

Product Type Features

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board, Cable-to-Panel
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	-------------

Body Features

Body Material	Polyester, PBT
Body Material Finish	Passivated
Body Plating Material	Nickel

Contact Features

RF Connector Center Contact Underplating Material	Nickel
---	--------



5080 μin

RF Connector Center Contact Plating Material

Tin

RF Connector Center Contact Material

Phosphor Bronze

Termination Features

Termination Post & Tail Length

5.33 mm[.21 in]

Termination Method to Printed Circuit Board

Through Hole - Solder

Mechanical Attachment

Panel Attachment Style

Rear Mount

PCB Mount Retention

With

RF Connector Coupling Mechanism

Bayonet

Connector Mounting Type

Panel Mount

RF Contact Captivation Method

Mechanical

Detent

With

Housing Features

Housing Color

Black

Dimensions

Mounting Post Length

3.48 mm[.137 in]

Profile Height from PCB

34.93 mm[1.375 in]

RF Connector Mated Outer Diameter (Approximate)

14.53 mm[.572 in]

Usage Conditions

Insulation Option

Uninsulated

Operating Temperature Range

-55 – 85 °C[-67 – 185 °F]

Operation/Application

Operating Frequency

4 GHz

Packaging Features

Packaging Method

Tube

Other

RF Connector Comment

If an Insulating Bushing is required, see Part Number 330620., Lockwasher and Jam Nut must be ordered separately.

Grade

Commercial

Dielectric Material

Polymethylpentene



Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 5227426-1 BNC BLKHD RECPT SEALED</p>	 <p>TE Part # 1-329631-2 JAM NUT, PLATED</p>	 <p>TE Part # 5330876 BNC PLUG</p>
---	---	---

Customers Also Bought




TE Part #1-1622820-9
3520 1R2 5%




TE Part #1-1571983-0
GDH08S04=DIP SWITCH



TE Part #6339082-3
LED STK MJ ASSY, 2X4, 8 POS, CAT5

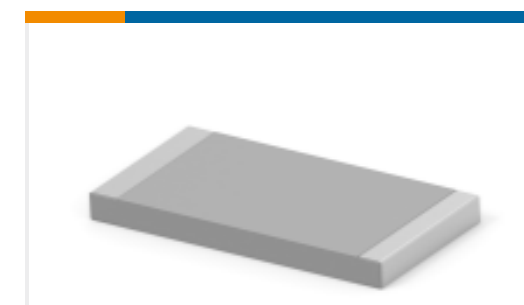


TE Part #3-2176331-2
CRGP 2512 3K9 1%

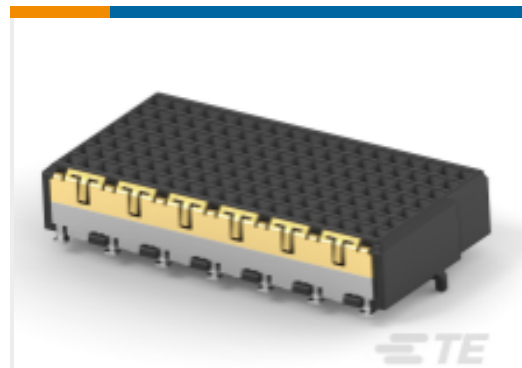


TE Part #214352-E
MSPEED 133 F SMD F4 * A-G VVV
137 094 *



TE Part #254877-E
MSPEED 50 M SMD M1 B AB VV 137
094 * * E

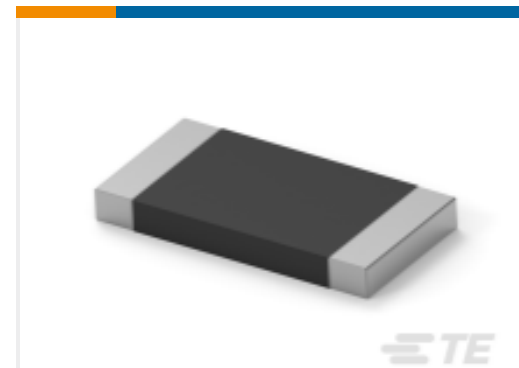

TE Part #7-2176422-6
TLRP 2512 3.0W R100 1% 50PPM 4K RL

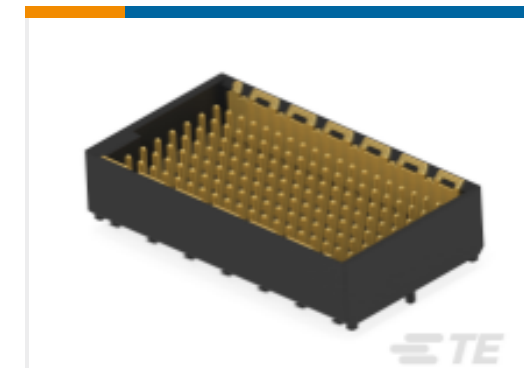

TE Part #214355-E
MSPEED 133 M SMD M1 * A-G VVV
137 176 *

Documents

Product Drawings

VERT JK W/MTG PINS, BNC PCB

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5227222-2_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5227222-2_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5227222-2_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BNC Connectors

English

Product Specifications

Product Specification

English

Product Specification

English



Product Environmental Compliance

[VERT JK W/MTG PINS, BNC PCB](#)

English

[VERT JK W/MTG PINS, BNC PCB](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English