


SOLISTRAND

TE Internal #: 53126-1 Spring Spade Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.51 mm [.138 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated View on TE.com > connectivity

Terminals & Splices > Spade Terminals

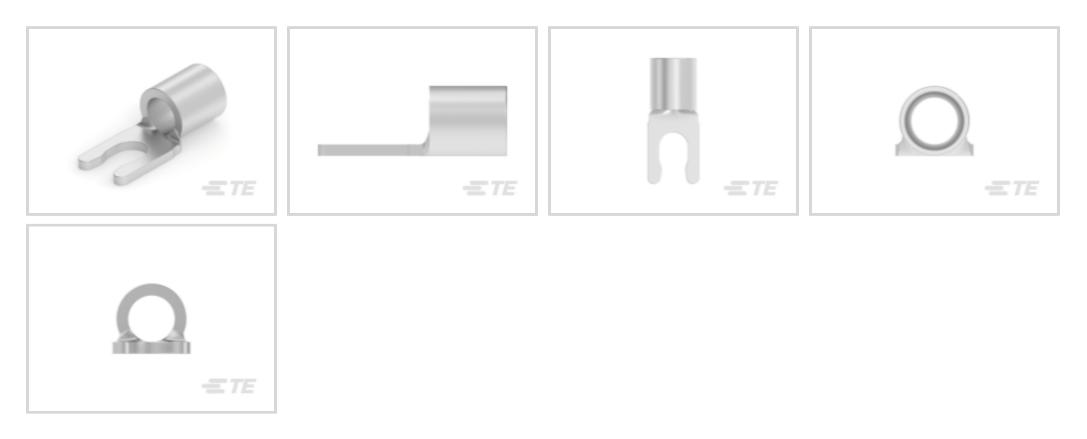

Spade Terminal Type: Spring Spade Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: **#6, M3.5**

Features

Product Type Features

Stud Size

| Sealable | No | |
|--|------------------------|--|
| Wire Insulation Support Retention Type | Non-Insulation Support | |
| Contact Features | | |
| Spade Terminal Type | Spring Spade Terminal | |
| Barrel Type | Closed | |
| Terminal Orientation | Straight | |
| Terminal Plating Material | Tin | |
| Mechanical Attachment | | |
| Wire Insulation Support | Without | |
| Dimensions | | |
| Wire Size | 5180 – 13100 CMA | |
| Stud Diameter | 3.51 mm[.138 in] | |
| Tongue Thickness | .99 mm[.039 in] | |
| Product Length | 16.15 mm[.636 in] | |
| Barrel Inside Diameter | 3.28 mm[.129 in] | |

C For support call+1 800 522 6752

53126-1

Spring Spade Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.51 mm [.138 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



Usage Conditions

| Insulation Option | Uninsulated |
|---|----------------|
| Operating Temperature Range | 170 °C[338 °F] |
| Operation/Application | |
| Compatible With Wire Base Material | Copper |
| Compatible With Wire Plating Material | Tin |
| Industry Standards | |
| Government Qualified Terminal | No |
| Packaging Features | |
| Packaging Quantity | 500 |
| Packaging Method | Loose Piece |
| | |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |

| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
|--|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

53126-1

Spring Spade Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.51 mm [.138 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



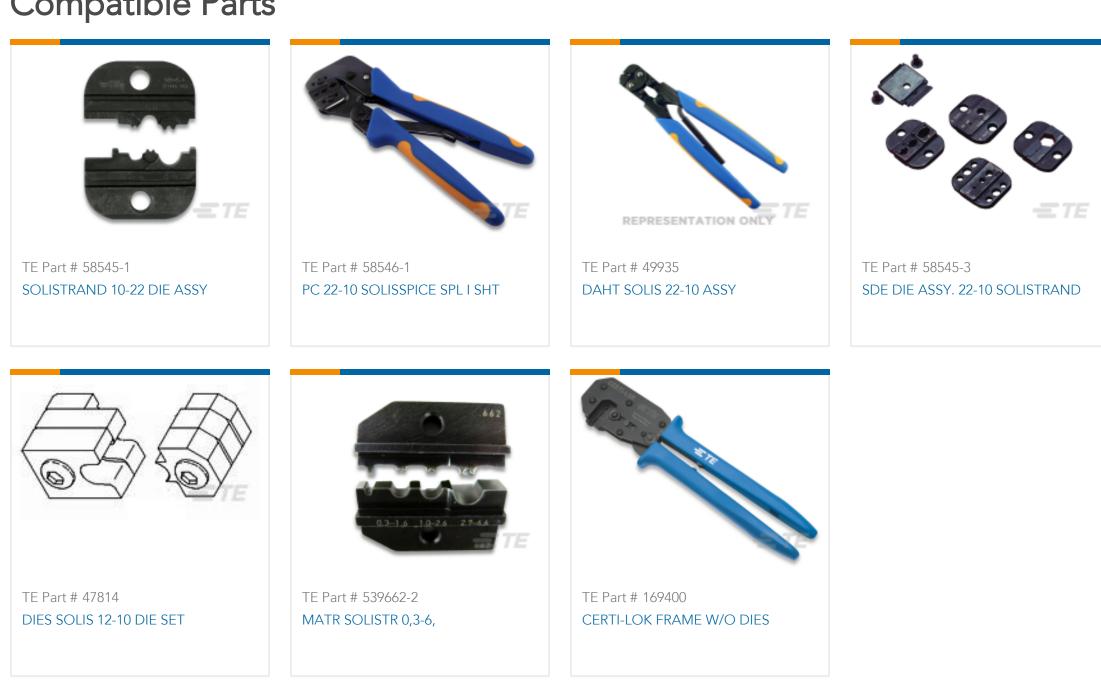

Compatible Parts

Customers Also Bought



| TE Part #1-1625984-7 HSA50 1K0 5% | TE Part #4515-DS5A002DP 2IN DP PRESSURE SENSOR 10% TO 90% | TE Part #1734327-2 MINI USB, TYPE A, R/A, SMT | TE Part #177469-000 B-106-3632 |
|--|---|---|---|
| | | | E TE |
| TE Part #5796055-2 68 CHAMP R/A ASSY,LC | TE Part #323096 SOLIS R 22-16 COMM 22-18 MIL 4 | TE Part #1-745495-9 25 HDE MS RCPT,20-22,LEAD FREE | TE Part #718759-000 44AM1121-22-9/96-9CS2275 |



53126-1

Spring Spade Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.51 mm [.138 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



Documents

Product Drawings TERMINAL, SOLIS SPR SPD 12-106

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_53126-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_53126-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_53126-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals UL Report

English