
# 53419-1 - ACTIVE

### PIDG

TE Internal #: 53419-1 Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [. 265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG

### View on TE.com >

Terminals & Splices > Ring Terminals > PIDG Radiation Resistant C Rings/Spades

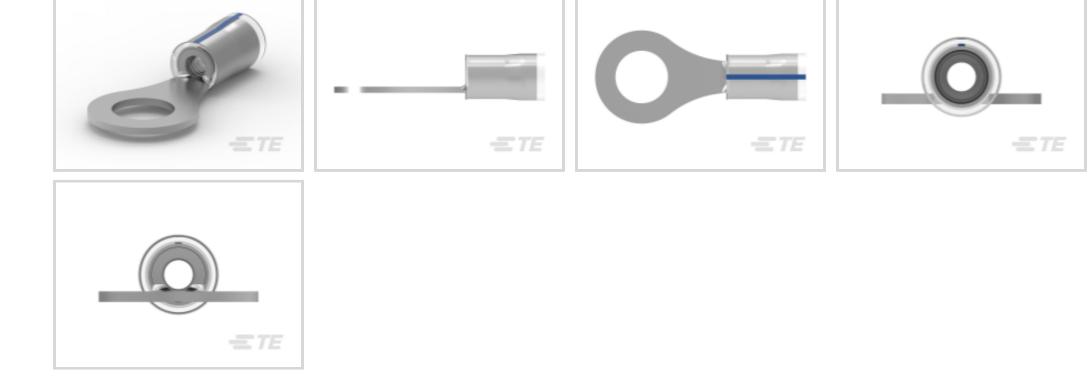

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: M6

All PIDG Radiation Resistant C Rings/Spades (39)





### **Product Type Features**

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	M6
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Body Features	
Insulation Sleeve Color	Natural
Contact Features	
Military Part Class	Class I
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin-Lead
Mechanical Attachment	

Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG



Wire Insulation Support	With		
Dimensions			
Wire Size	2050 – 5180 CMA		
Stud Diameter	6.73 mm[.265 in]		
Tongue Thickness	.84 mm[.033 in]		
Product Length	27.38 mm[1.078 in]		
Compatible Insulation Diameter (Max)	3.81 mm[.15 in]		
Compatible Insulation Diameter Range	2.67 – 3.81 mm[.105 – .15 in]		
Jsage Conditions			
Insulation Option	Partially Insulated		
Operating Temperature Range	150 °C[302 °F]		
Operation/Application			
Compatible With Wire Base Material	Copper		
Compatible With Wire Plating Material	Tin		
ndustry Standards			
Government Qualified Terminal	Yes		
Packaging Features			
Packaging Quantity	1000		
Packaging Method	Loose Piece		
Product Compliance	Loose Piece Not Compliant		
Product Compliance For compliance documentation, visit the product page on TE.com>			
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant		
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant Compliant with Exemptions		

Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG




#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

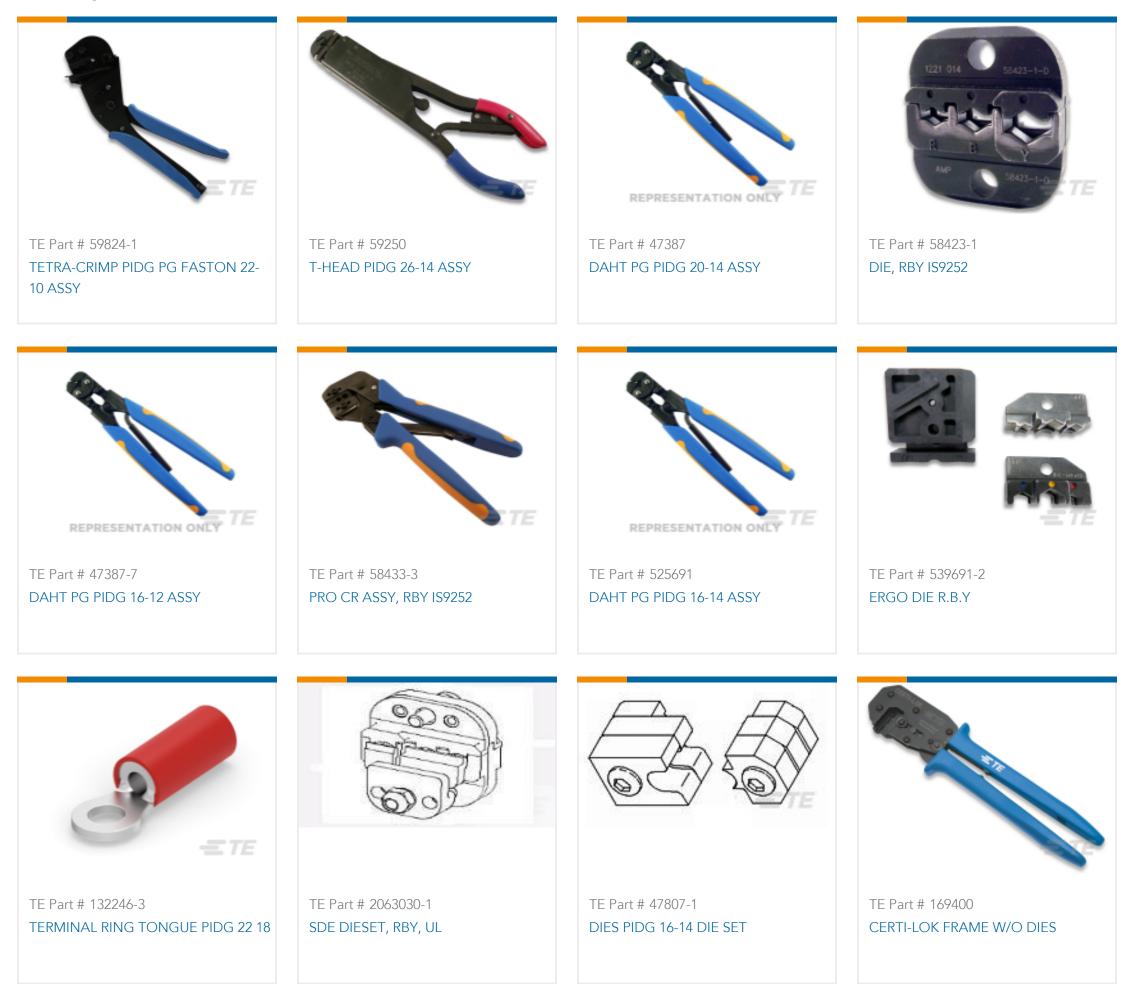


Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG







# Also in the Series | PIDG

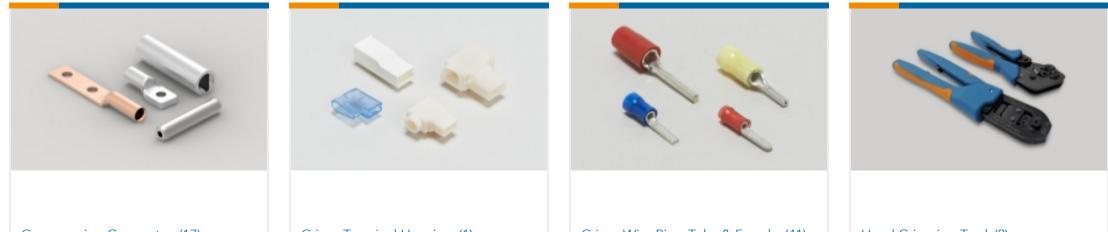


Compression Connectors(17)	Crimp Terminal Housings(1)	Crimp Wire Pins, Tabs & Ferrules(41)	Hand Crimping Tools(2)
		and the second second	
Knife Disconnects(11)	PCB Terminals(7)	Quick Disconnects(49)	Ring Terminals(611)
Spade Terminals(233)	Special Purpose Terminals(1)	Splices(46)	

# Customers Also Bought

Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG



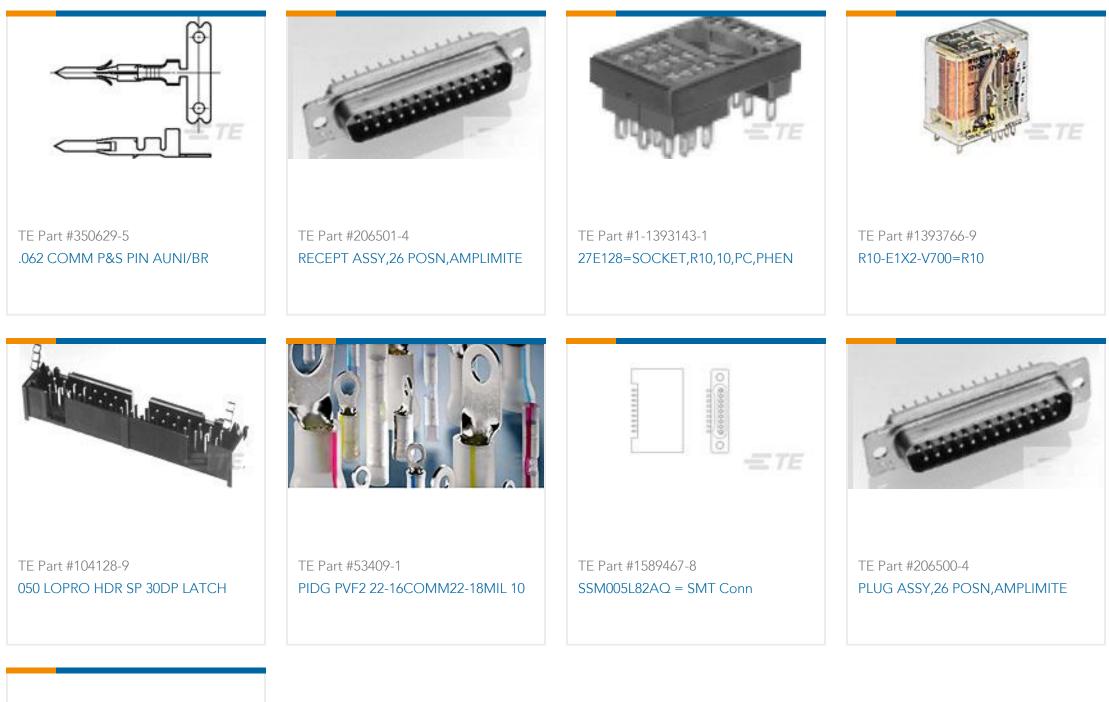



### Documents

Product Drawings TERMINAL, PIDG PVF2 R 16-14 1/4

English

CAD Files Customer View Model ENG\_CVM\_53419-1\_R1.3d\_igs.zip English Customer View Model ENG\_CVM\_53419-1\_R1.3d\_stp.zip English Customer View Model ENG\_CVM\_53419-1\_R1.2d\_dxf.zip English 3D PDF

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

Closed Ring Tongue Terminal, 16 AWG, M6 Stud Size, 6.73 mm [.265 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, Partially Insulated, PIDG



#### RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English

Product Specifications

**Application Specification** 

English

## Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English