


### PIDG

TE Internal #: 53420-1 Closed Ring Tongue Terminal, 16 AWG, 5/16 / M8 Stud Size, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG View on TE.com >

Terminals & Splices > Ring Terminals > PIDG Radiation Resistant C Rings/Spades

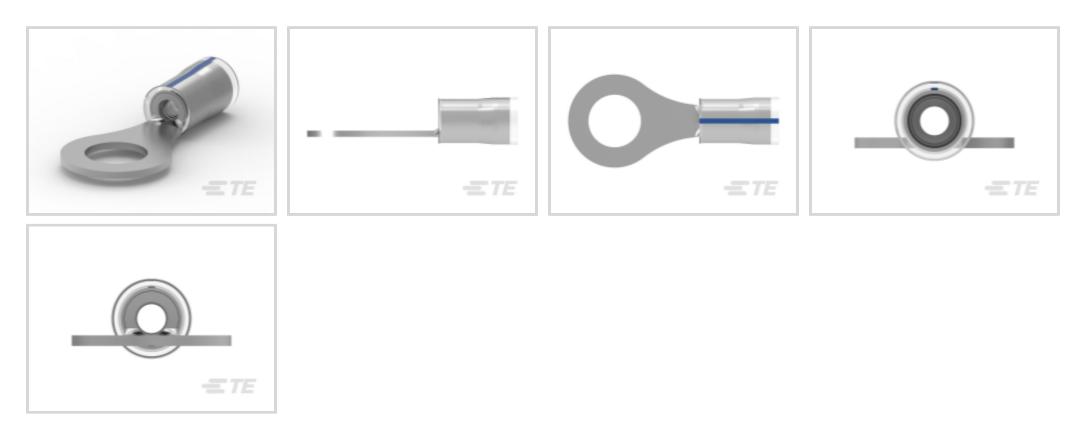

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: 5/16, M8

All PIDG Radiation Resistant C Rings/Spades (39)

### Features

Product Type Features



| Ring Terminal Product Type             | Closed Ring Tongue Terminal |
|--|-----------------------------|
| Stud Size                              | 5/16, M8                    |
| Sealable                               | No                          |
| Wire Insulation Support Retention Type | Insulation Support          |
| Configuration Features                 |                             |
| Number of Holes                        | 1                           |
| Body Features                          |                             |
| Insulation Sleeve Color                | Natural                     |
| Stripe Color                           | Blue                        |
| Contact Features                       |                             |
| Military Part Class                    | Class I                     |
| Barrel Type                            | Closed                      |
| Terminal Orientation                   | Straight                    |
| Terminal Plating Material              | Tin-Lead                    |

Closed Ring Tongue Terminal, 16 AWG, 5/16 / M8 Stud Size, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



### **Mechanical Attachment**

| Wire Insulation Support               | With                          |
|---------------------------------------|-------------------------------|
| Dimensions                            |                               |
| Wire Size                             | 2050 – 5180 CMA               |
| Stud Diameter                         | 8.33 mm[.328 in]              |
| Tongue Thickness                      | .84 mm[.033 in]               |
| Product Length                        | 27.38 mm[1.078 in]            |
| Compatible Insulation Diameter (Max)  | 3.81 mm[.15 in]               |
| Compatible Insulation Diameter Range  | 2.67 – 3.81 mm[.105 – .15 in] |
| Usage Conditions                      |                               |
| Insulation Option                     | Partially Insulated           |
| Operating Temperature Range           | 150 °C[302 °F]                |
| Operation/Application                 |                               |
| Compatible With Wire Base Material    | Copper                        |
| Compatible With Wire Plating Material | Tin                           |
| Industry Standards                    |                               |
| Government Qualified Terminal         | Yes                           |

# Packaging Features

| Packaging Quantity  | 1000  |
|---|---|
| Packaging Method  | Loose Piece   |
|   |   |
| Product Compliance  |   |
| For compliance documentation, visit the product page on TE.com> |   |
|   |   |
| EU RoHS Directive 2011/65/EU                                    | Not Compliant   |
| EU ELV Directive 2000/53/EC                                     | Compliant with Exemptions   |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: JUNE 2023  |
|   | (235)   |
|   | Candidate List Declared Against: JUNE   |
|   | 2023 (235)  |
|   | SVHC > Threshold:   |
|   | Pb (13% in Component Part)  |
|   | Article Safe Usage Statements:<br>Do not eat, drink or smoke when using this product. Wash thoroughly after<br>handling, Recycle if possible and dispose of the article by following all applicable |

handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900

Closed Ring Tongue Terminal, 16 AWG, 5/16 / M8 Stud Size, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**



| REPRESENTATION ONLY             |                         | REPRESENTATION ONLY     |  |
|---------------------------------|-------------------------|-------------------------|--|
| TE Part # 47387-7               | TE Part # 58433-3       | TE Part # 525691        | TE Part # 539691-2   |
| DAHT PG PIDG 16-12 ASSY         | PRO CR ASSY, RBY IS9252 | DAHT PG PIDG 16-14 ASSY | ERGO DIE R.B.Y   |
|                                 |                         |                         | The second secon |
| TE Part # 132246-3              | TE Part # 2063030-1     | TE Part # 47807-1       | TE Part # 169400   |
| TERMINAL RING TONGUE PIDG 22 18 | SDE DIESET, RBY, UL     | DIES PIDG 16-14 DIE SET | CERTI-LOK FRAME W/O DIES   |

Closed Ring Tongue Terminal, 16 AWG, 5/16 / M8 Stud Size, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG




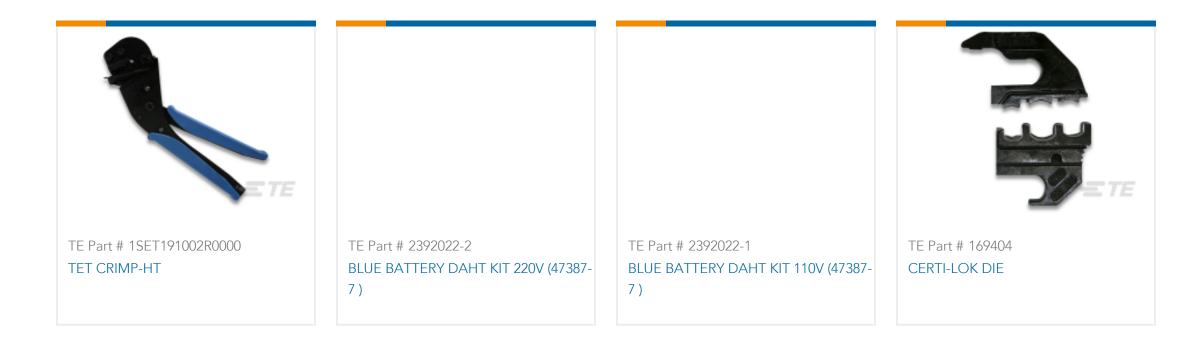

# Also in the Series | PIDG



|                       |    |                 |                       | I |                     |  |
|-----------------------|----|-----------------|-----------------------|---|---------------------|--|
| Knife Disconnects(11) | Pi | CB Terminals(7) | Quick Disconnects(49) |   | Ring Terminals(607) |  |

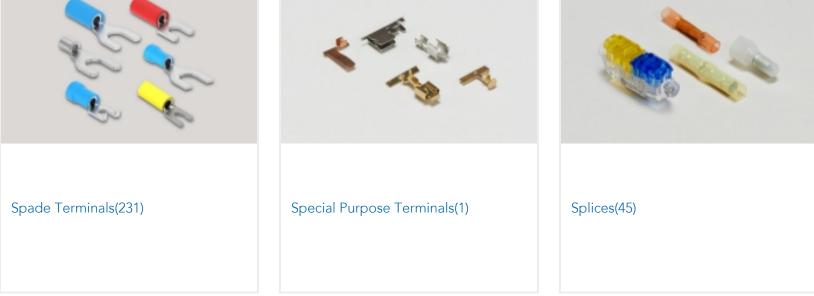


# Customers Also Bought



Closed Ring Tongue Terminal, 16 AWG, 5/16 / M8 Stud Size, 8.33 mm [.328 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



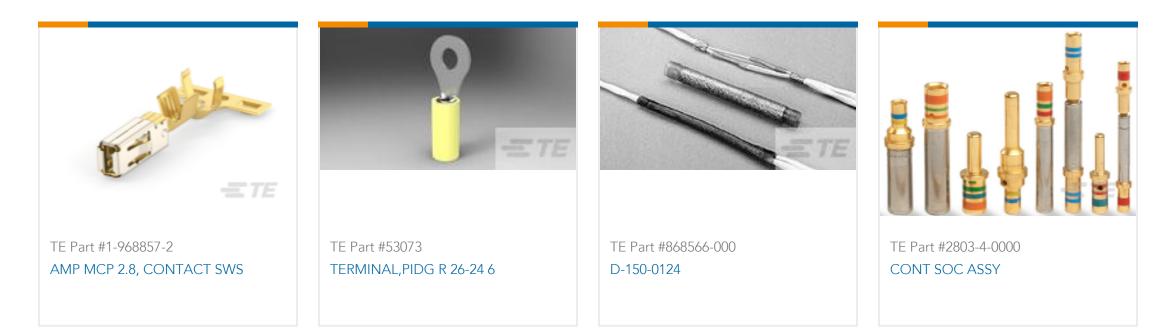



TE Part #4-1618415-5 CAP120RBXNG = CONTACTOR, SPST-NO W/AUX



TE Part #YCTJ122E05EC015000 MODULE ASSY

# Documents

Product Drawings TERMINAL, PIDG PVF2 R 16-14

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_53420-1\_G.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_53420-1\_G.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_53420-1\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English

Product Specifications
Application Specification

English